



 *Maxxima*[®]

OUR MISSION

TO CONQUER DARKNESS, PROVIDE ILLUMINATION AND SAFETY AT ALL TIMES WITH TECHNOLOGICALLY ADVANCED LIGHTING AND AUDIBLE DEVICES.

OUR VALUES

AS A COMPANY WE VALUE

- Empowering our people and partnerships
- Discovering and nurturing exceptional individuals
- Honesty, respect, and unwavering integrity
- A passionate drive to exceed customer expectations
- Relentless innovation, purposeful creativity, and uncompromising quality
- Protecting our reputation — because once lost, no amount of money can recover it

“Don't judge each day by the harvest you reap but by the seeds you plant.”

- Robert Louis Stevenson

CATALOG TERMS

THE FOLLOWING ABBREVIATIONS ARE USED THROUGHOUT THIS CATALOG

CM	CLEARANCE/MARKER
DRL	DAYTIME RUNNING LIGHT
STT	STOP/TURN/TAIL
PFT	PARK/FRONT TURN
PRT	PARK/REAR TURN
FMVSS	FEDERAL MOTOR VEHICLE SAFETY STANDARD
SAE	SOCIETY OF AUTOMOTIVE ENGINEERS

ISO 9001:2015



LED FORWARD LIGHTING

5	Heated Headlights
6-7	4" x 6", 5" x 7", 7" Round Headlights
8	90MM Headlights, DRL
9	Fog Lights, Snow Plow Headlights

LED WORK LIGHTS

12	Heated Work Lights
13-21	Work Lights
22-23	Work Light Bars
24-28	Scene Lights
29	Surface Mount Work Lights

LED INTERIOR LIGHTS

31-37	Interior Dome Lights
38-39	Rigid Linear Strip Lights
40-42	Flexible Strip Lights
43-45	Courtesy Lights/Auxiliary Lights

MAXXIMA WARNING & SAFETY

47-49	Full-Size Lightbars
50-51	Mini Lightbars
52-54	LED Beacons
55	Traffic Directors
56-59	Surface Mount Directional Lights
60-61	4" & 6" Flashing Warning Lights
63-64	Back-Up Alarms

LED STOP/TURN/TAIL & BACK-UP & LICENSE LIGHTS

66-69	HYBRID & Patented Multi-Function STT/BU
70	<i>MaxxHeat</i> Heated LED STOP/TURN/TAIL
71-75	4" & 6" STOP/TURN/TAIL
76-78	Rectangular, Box Lights, AUX STT
79-82	Back-Up
83-85	License Lights
86	7" Bus Lights
87-91	Amber Turn Signals


LED CLEARANCE MARKERS

93-95	Dual-Color, Dual Function C/M
94-96	3/4" and 1-1/4" Clearance Markers
97-99	2" and 2-1/2" Clearance Markers
100-105	OE-STYLE Clearance Markers
106-107	ID Bars

ACCESSORIES

109-112	Electrical
113-115	Mounting Accessories
116	Retail Displays
121-122	Lighting ID Codes

LED FORWARD LIGHTING

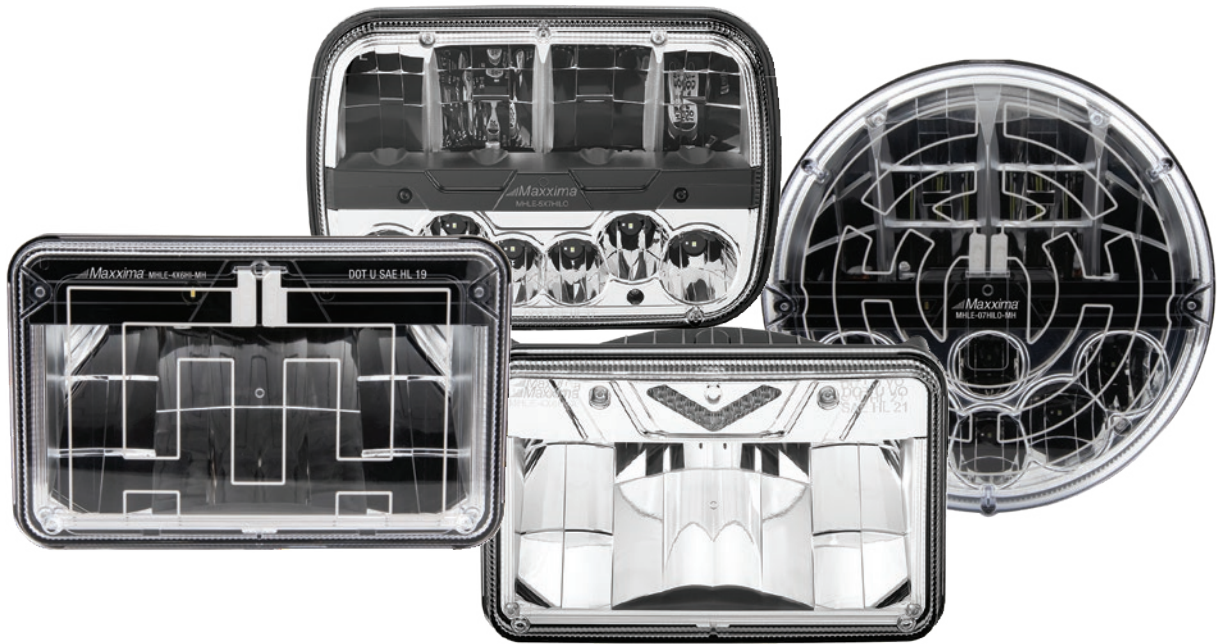

-
- HEATED HEADLIGHTS
 - HEADLIGHTS
 - DAYTIME RUNNING LIGHTS
 - SNOW PLOW HEADLIGHTS
 - FOG LIGHTS

MaxxHeat HEATED HEADLIGHTS

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

MHLE-SERIES 4" X 6" MaxxHeat HEATED HEADLIGHTS



MaxxHeat



Temperature Sensor

"Heat On" Indicator

Heated Lens Melts Snow & Ice

PART NUMBER	DESCRIPTION
MHLE-4X6LO-MH	4" X 6" LOW BEAM MaxxHeat
MHLE-4X6HI-MH	4" X 6" HIGH BEAM MaxxHeat

Voltage	12/24VDC
Amp Draw (at 12.8V)	Heater Off: Low Beam 0.7A High Beam 0.9A Heater On: Low Beam 1.7A High Beam 2.0A
Dimensions	6.6" W x 4.2" H x 3.4" D
Connector	Integrated Male H4 3-Pin or 2-Pin
LEDs	5
Legal Heading	Low DOT L SAE HL / High DOT U SAE HL
DOT*/SAE	J2650

- Heating element is activated when the temperature drops below 45°F (7°C)
- "Heat On" Indicator lights up when heating element is on
- Polycarbonate Housing / Polycarbonate Lens
- MaxxShield Hard Coating with UV Protection
- Mechanical Aiming Pads
- Retrofits ANSI# H4651 (HI), H4656 (LO)
- 3 Year Warranty

MHLE-SERIES 5" X 7" MaxxHeat HEATED HEADLIGHTS



MaxxHeat



PART NUMBER	DESCRIPTION
MHLE-5X7HILO-MH	5" X 7" HI/LO DUAL BEAM MaxxHeat
MHLE-07HILO-MH	7" ROUND HI/LO DUAL BEAM MaxxHeat

Voltage	12/24VDC
Amp Draw (at 12.8V)	Heater Off: Low Beam 0.8A High Beam 1.6A Heater On: Low Beam 2.9A High Beam 3.7A
Dimensions	7.9" W x 5.6" H x 3.9" D 7.0" Diameter x 3.75" Depth
Connector	Integrated Male H4 3-Pin
LEDs	12
Legal Heading	DOT SAE HL
DOT*/SAE	J2650

- Heating element is activated when the temperature drops below 45°F (7°C)
- "Heat On" Indicator lights up when heating element is on
- Polycarbonate Housing / Polycarbonate Lens
- MaxxShield Hard Coating with UV Protection
- Mechanical Aiming Pads
- MHLE-5X7HILO-MH Retrofits ANSI# 6052, 6053, H6054
- MHLE-07HILO-MH Retrofits ANSI# 6014, 6015, 6016, H6024
- 3 Year Warranty

*All Maxxima headlights are DOT FMVSS108 / CMVSS108 Compliant

LED FORWARD LIGHTING

GEN2 MHLE-SERIES 4" X 6" POLYCARBONATE DRL / LOW BEAM HEADLIGHT



MHLE-4X6DRL
Low Beam & DRL

PART NUMBER	DESCRIPTION
MHLE-4X6DRL	4" X 6" COMBO DRL / LOW BEAM

Voltage	12/24VDC	• Mechanical Aim Compliant
Amp Draw	0.7A 12V / 0.4A 24V	• Visual Aim Compliant
Dimensions	6.6" W x 4.2" H x 3.4" D	• Polycarbonate Lens & Housing
Connector	3-Pin Male H4	• <i>MaxxShield</i> Hard Coating with UV Protection
LEDs	18	• Non-Polarized Pin Out
Legal Heading	DOT L VOL DRL SAE HL	• Retrofits ANSI# H4656
DOT*/SAE	J2650, J2087	• 3 Year Warranty

Dedicated DRL Light comes on with PWM DRL circuit, and separate Low Beam function

GEN2 MHLE-SERIES 4" X 6" POLYCARBONATE LOW BEAM HEADLIGHT



MHLE-4X6LO-A
Low Beam

PART NUMBER	DESCRIPTION
MHLE-4X6LO-A	4" X 6" LOW BEAM

Voltage	12/24VDC	• Mechanical Aim Compliant
Amp Draw	0.7A 12V / 0.4A 24V	• Visual Aim Compliant
Dimensions	6.6" W x 4.2" H x 3.4" D	• Polycarbonate Lens & Housing
Connector	3-Pin Male H4	• <i>MaxxShield</i> Hard Coating with UV Protection
LEDs	6	• Non-Polarized Pin Out
Legal Heading	DOT L VOL SAE HL	• Retrofits ANSI# H4656
DOT*/SAE	J2650	• 3 Year Warranty

GEN2 MHLE-SERIES 4" X 6" POLYCARBONATE HIGH BEAM HEADLIGHT



MHLE-4X6HI-A
High Beam

PART NUMBER	DESCRIPTION
MHLE-4X6HI-A	4" X 6" HIGH BEAM

Voltage	12/24VDC	• Mechanical Aim Compliant
Amp Draw	0.9A 12V / 0.5A 24V	• Visual Aim Compliant
Dimensions	6.6" W x 4.2" H x 3.4" D	• Polycarbonate Lens & Housing
Connector	2-Pin Male H4	• <i>MaxxShield</i> Hard Coating with UV Protection
LEDs	5	• Non-Polarized Pin Out
Legal Heading	DOT U VO SAE HL	• Retrofits ANSI# H4651
DOT*/SAE	J2650	• 3 Year Warranty



3-Prong Low Beam and DRL



2-Prong High Beam



*All Maxxima headlights are DOT FMVSS108 / CMVSS108 Compliant

MHLE-SERIES 5" X 7" POLYCARBONATE HEADLIGHT



PART NUMBER	DESCRIPTION
MHLE-5X7HILO	5" X 7" HI/LO DUAL BEAM

Voltage	12/24VDC Dual Voltage	• Polycarbonate Housing / Polycarbonate Lens
Amp Draw	1.6A 12V / 0.8A 24V	• MaxxShield Hard Coating with UV Protection
Dimensions	7.9" W x 5.6" H x 3.9" D	• Mechanical Aiming Pads
Connector	Integrated Male H4 3-Pin	• Ultra Lightweight – Only 17.9 oz.
LEDs	12	• Retrofits ANSI# 6052, 6053, H6054
Legal Heading	DOT SAE HL	• 3 Year Warranty
DOT*/SAE	J2650	

MHLE-SERIES 7" ROUND POLYCARBONATE HEADLIGHT



PART NUMBER	DESCRIPTION
MHLE-07HILO	7" ROUND HI/LO DUAL BEAM

Voltage	12/24VDC Dual Voltage	• Polycarbonate Housing / Polycarbonate Lens
Amp Draw	1.6A 12V / 0.8A 24V	• MaxxShield Hard Coating with UV Protection
Dimensions	7.0" Diam. x 3.75" Depth	• Mechanical Aiming Pads
Connector	Integrated Male H4 3-Pin	• Ultra Lightweight – Only 17.2 oz.
LEDs	12	• Retrofits ANSI# 6014, 6015, 6016, H6024
Legal Heading	DOT SAE HL	• 3 Year Warranty
DOT*/SAE	J2650	

5.75" ROUND DUAL BEAM HEADLIGHT



PART NUMBER	DESCRIPTION
MHL-05HILO	5.75" ROUND HI/LO DUAL BEAM

Voltage	12/24VDC	• Aluminum Housing / Polycarbonate Lens.
Amp Draw	1.5A HI 0.9A LO	• MaxxShield Hard Coating with UV Protection
Dimensions	5.75" Diam. x 3.5" Depth	• Light Weight – Only 2.0lbs
Connector	2" Cable with Male H4	• Retrofits ANSI 5001, 5006, H5001, H5006
LEDs	2	• 5 Year Warranty
Legal Heading	DOT VOR SAE HL	
DOT*/SAE	J2650	

**All Maxxima headlights are DOT FMVSS108 / CMVSS108 Compliant*

T: 631-434-1200 F: 631-952-0349 | WWW.MAXXIMA.COM 7

LED FORWARD LIGHTING

90MM LED LOW BEAM HEADLIGHTS



PART NUMBER	DESCRIPTION
MHL-90MMLO	90MM LOW BEAM
MHL-90MMHI	90MM HIGH BEAM
MHL-90MMHILO	90MM HI/LO DUAL BEAM

Voltage	12/24VDC Dual Voltage	<ul style="list-style-type: none"> • 90mm LED Headlights -- Low or High - Low Beam Only (MHL-90MMLO) - High Beam Only (MHL-90MMHI) - Or Combination Hi/Low (MHL-90MMHILO)
Amp Draw	1.4A 12V / 0.7A 24V	
- HILO	2.2A 12V / 1.3A 24V	<ul style="list-style-type: none"> • Visual Aim Compliant • Polycarbonate Lens with UV Hardcoat • Cast Aluminum Housing • Bulk Pack Individually Boxed • 5 Year Warranty
Dimensions	4.13" W x 4.13" H x 5.9" D	
- Lens	90mm	
Mounting	4 Bolt 3.35" Center to center	
Connector	15" Cable with 2-pin DryFit	
- HILO	15" Cable with 3-pin DryFit	
LED	LO or HI: 1 / HILO: 2	
Legal Heading		
- LOW	DOT L VOR SAE HL	
- HIGH	DOT U VO SAE HL	
- HILO	DOT VOR SAE HL	
DOT*/SAE	J2650	

DRL/DAY TIME RUNNING LIGHT OR PROJECTOR LIGHT



PART NUMBER	DESCRIPTION
PLB-630-A	DRL PROJECTOR LIGHT

Voltage	12.8VDC
Amp Draw	0.6A
Dimensions	4.4" W x 1.4" H x 1.2" D
Mounting	Adjustable Stainless Steel Bracket
Connector	2 Leads Blunt Cut, 7"
LEDs	3
Legal Heading	DOT SAE DRL
DOT*/SAE	J2087

- DOT Compliant DRL / Daytime Running Light
- 500 Lumens
- Can also be used as Work Light or Projector Light
- Compact size, light head only 4.4" x 1.4"
- Cast Aluminum Housing & Polycarbonate Lens
- Stainless Steel Mounting Bracket Included
- 5 Year Warranty

**All Maxxima headlights are DOT FMVSS108 / CMVSS108 Compliant*

HEATED HEADLIGHT, TURN SIGNAL, DRL, PARKING LAMP, AND FLASHING WARNING LIGHT



PART NUMBER	DESCRIPTION
MSPHL-20DRL-MH	SNOW PLOW HEADLIGHT <i>MaxxHeat</i>
Voltage	12/24VDC
Amp Draw	Low Beam 1.2A High Beam 2.2A Heat 4.0A, Max Amp 7.5A
Dimensions	9.0" W x 6.3" H x 3.7" D
Mounting	(2) M10 Bolts - Adjustable 2.7" to 3.5" C to C
Connector	Integrated DT04-6P, Includes 8.2 foot shielded 6-conductor cable, DT06-6S x blunt cut
LEDs	24 Total (20 Amber/White, and 4 High Power LEDs)
Legal Heading	DOT VOL SAE HL DRL I5 P W-1
DOT*/SAE	SAE J588, J595, J2087, J2650

- Multi-Function Headlight, Turn Signal, DRL, Parking Lamp, and Flashing Warning
- HI/LO Dual Beam Headlight
- DOT FMVSS108 / CMVSS108 Compliant (All functions)
- *MaxxHeat* Heated Lens, Automatically Activates
- Optional SAE J595 Class 1 Flashing Warning Light
- Integrated Turn Signal and DRL / Park Light
- Universal – Left or Right Mount
- 2-Stub Mount with Adjustable Swivel Bracket
- 8.2 foot Shielded Cable for Easy Install
- 100-degree Swivel Bracket for Bottom-Mount or Rear-Mount
- Visual Aim Compliant
- 3 Year Warranty

MINI OVAL FOG LIGHTS



PART NUMBER	DESCRIPTION
MFL-200SY	SELECTIVE YELLOW FOG LIGHT
MFL-200W	WHITE FOG LIGHT

Voltage	12/24VDC
Amp Draw	0.8A 12V / 0.4A 24V
Dimensions	3.5" W x 2.7" H x 2.9" D
Mounting	Adjustable Stainless Steel Bracket
Connector	2 Leads Blunt Cut, 12"
LEDs	6
Legal Heading	F3
DOT/SAE	J583

- Fog Beam Pattern
- Aluminum & ABS Housing
- Acrylic Lens
- 12/24VDC Dual Voltage
- Stainless Steel Bracket
- DOT FMVSS108 / CMVSS108 Compliant
- 5 Year Warranty

LED WORK LIGHTS



***MaxxHeat* HEATED WORK LIGHTS**

WORK LIGHTS

WORK LIGHT BARS

SCENE LIGHTS

SURFACE MOUNT WORK LIGHTS

LED WORK LIGHTS



LED WORK LIGHT LUMENS CHART

All Maxxima work lights undergo stringent testing to measure light output in an Integrating Sphere, in accordance with **Illuminating Engineering Society of North America (IESNA) standard LM-79**. Light output (Lumens) is recorded after the lamp is completely warmed up at least 30 minutes. All lumen ratings referenced are warm, effective Lumens. The test process ensures Maxxima customers the actual light output matches the listed lumen output.

	LUMENS	PART NUMBER	DESCRIPTION	PAGE #
	400	MWL-33	3" x 6" Rectangular Exterior Scene / Load Light 400 Lumens	28
	500	MWL-21	Rectangular 6 LED Work Light 500 Lumens - Black Aluminum Housing	21
	550	MWL-63	6" Oval LED Work Light 550 Lumens DryFit	29
	550	MWL-63-X	6" Oval LED Work Light 550 Lumens DryFit - Bulk Pack	29
	590	MWL-13-A	Low Profile Surface Mount Work Light 12/24VDC 590 Lumens	29
	700	MWL-12	Round 4" LED Work Light - Lamp Only for MWL-11HL 700 Lumens	29
	800	MWL-19-B	Round 15 LED Work Light 12/24VDC 800 Lumens	13
	800	MWL-19B-MH	Round 15 LED Work Light 800 Lumens 12/24VDC <i>MaxxHeat</i>	12
	820	MWL-14-A	Low Profile Surface Mount Work Light 12/24VDC 820 Lumens	29
	900	MWL-26-B	Rectangular 15 LED Work Light 900 Lumens 12/24VDC	13
IMPROVED	1,000	MWL-04	Rectangular LED Work Light - Black 12/24VDC 1,000 Lumens	21
NEW	1,100	MWL-32-YWCL	11.8" x 6" Exterior Scene / Load Light Amber White Clear Lens 52 LED	27
	1,300	MWL-38-A	Round 15 LED Work Light 1,300 Lumens 12/24VDC	13
	1,300	MWL-39-A	Rectangular 15 LED Work Light 1,300 Lumens 12/24VDC	14
	1,400	MWL-28	Round 6 LED Black Work Light 1,400 Lumens 12/24VDC	14
	1,400	MWL-29	Rectangular 6 LED Work Light 1,400 Lumens 12/24VDC	14
	1,400	MWL-30	Square 6 LED Work Light 1,400 Lumens 12/24VDC	15
	1,400	MWL-34	2" x 9" Rectangular Exterior Scene / Load Light 1,400 Lumens	28
	1,450	MWL-20-A	Mini Square LED Work Light 1,450 Lumens 12/24VDC	20
	1,450	MWL-20-AD	Mini Square LED Work Light 1,450 Lumens 12/24VDC w/ Deutsch Connector	20
	1,500	MWL-01B	Round LED Work Light 1,500 Lumens	21
	1,500	MWL-35	4" x 6" Rectangular Work Light 1,500 Lumens	28
	1,500	MWL-51LS	11" x 2" Work Light 90-Degree Surface Mount 1,500 Lumen - Silver Housing	26
	1,600	MWL-65	2.7" x 9" Exterior Scene / Load Light 1,600 Lumens 12/24VDC	26
	1,800	MWL-32-A	1.8" x 6" Exterior Scene / Load Light 1800 Lumens 12/24VDC	27
NEW	1,800	MWL-32-ACH	1.8" x 6" Exterior Scene / Load Light 1800 Lumens 12/24VDC, Chrome Finish	27
IMPROVED	1,800	MWL-45-A	Mini Square 24 LED Work Light 1,800 Lumens 12/24VDC	20
NEW	2,000	MWL-70	Compact Round 6 LED Work Light 2,000 Lumens 12/24VDC	20
	2,100	MWL-47	6" Low Profile 6 LED Work Light 2,100 Lumens 12/24VDC	22
	2,400	MWL-41	Round 18 LED Black Work Light 2,400 Lumens 12/24VDC	15
	2,400	MWL-42	Rectangular 16 LED Black Work Light 2,400 Lumens 12/24VDC	16
	2,400	MWL-42WYCL-DC	Rectangular LED Work Light 2,400 AND Amber Class 1 Warning	16
	2,400	MWL-43	Square 18 LED Black Work Light 2,400 Lumens 12/24VDC	15
	2,400	MWL-50-A	Rectangular 6 LED Work Light Black Aluminum Housing 2,400 Lumens 12/24VDC	17
	2,500	MWL-52	11" x 2" Work Light 90-Degree Surface Mount 2,500 Lumen - Black Housing	26
	2,600	MWL-66	2.7" x 13" Exterior Scene / Load Light 2,600 Lumens 12/24VDC	26
	2,900	MWL-16-A	Square LED Work Light 12/24VDC 2,900 Lumens	17
	2,900	MWL-48	8.5" Low Profile 8 LED Work Light 2,900 Lumens 12/24VDC	22
	3,000	MTBL-10-A	Tow Bar Work Light 3,000 Lumens	23
	3,200	MWL-57-A	Rectangular 8 LED Work Light Black Aluminum Housing 3,200 Lumens 12/24VDC	17
NEW	3,500	MWBL-1-B	Work Bar Light 3,500 Lumens	23
	3,600	MWL-64	Square 9 LED Work Light 3,600 Lumens 12/24VDC Deutsch Connector	18
	4,200	MWL-36-A	Round Adjustable Work Light w/ Switch 4,200 Lumens 12/24VDC Deutsch Connector	25
NEW	5,500	MWL-61-A	Rectangular 56 LED Light Bar Scene Light 5,500 Lumens 12/36VDC, A-Series	18
NEW	7,000	MWL-62-A	Square 16 LED 7,000 Lumens Work Light 12/36VDC	18
	8,500	MWL-500	Square <i>MaxxBright</i> Work Light 8,500 Lumens Black Housing	19
	8,500	MWL-501	Square <i>MaxxBright</i> Work Light 8,500 Lumens White Housing	19
	9,500	MWL-510	Round <i>MaxxBright</i> Work Light 9,500 Lumens Black Housing	19
	9,500	MWL-511	Round <i>MaxxBright</i> Work Light 9,500 Lumens White Housing	19
	19,000	MWL-520	Rectangle <i>MaxxBright</i> Work Light 19,000 Lumens Black Housing	19
	19,000	MWL-521	Rectangle <i>MaxxBright</i> Work Light 19,000 Lumens White Housing	19
		MWL-19BY-MH	Round 15 LED Amber Work Light 12/24VDC <i>MaxxHeat</i>	12
NEW		MWL-42Y-MH	Rectangular Amber Work Light 12/24VDC, MaxxHeat	12

MaxxHeat ROUND POLYCARBONATE LED WORK LIGHT



MWL-19B-MH

MWL-19BY-MH

PART NUMBER	DESCRIPTION
MWL-19B-MH	WHITE CLEAR LENS LED WORK LIGHT – MaxxHeat LENS
MWL-19BY-MH	AMBER LENS LED WORK LIGHT – MaxxHeat LENS
Lumens	800 (White)
Voltage	12/24VDC
Amp Draw	
- Light	0.7A 12V / 0.4A 24V
- With Heater	2.4A 12V / 1.2A 24V
Dimensions	4.8" W x 1.5" D
Mounting	M8 Stainless Steel Bolt
Connector	2 Jacketed Leads Blunt Cut, 11"
LEDs	15

- MaxxHeat Heated Lens Activated Automatically when the temperature drops below 45 °F (7 °C)
- Patented MaxxHeat® Technology
- US Patent No 11,339,947
- Built-In Heater – No Additional Wires
- Dual Voltage 12/24VDC
- Polycarbonate Lens & Housing, Stainless Steel Bracket and Bolt
- 5 Year Warranty

NEW

MWL-42Y-MH HIGH POWER AMBER LED WORK LIGHT — HEATED LENS



PART NUMBER	DESCRIPTION
MWL-42Y-MH	RECTANGULAR AMBER WORK LIGHT 12/24VDC, MaxxHeat
Voltage	12/24VDC Dual Voltage
Amp Draw	2.25A 12V / 4.2A 12V with Heater On
Dimensions	5.9" W x 3.6" H x 1.5" D
Mounting	5/16" Stainless Steel Bolt
Connector	2 Wires, Jacketed, 11" – Blunt Cut
LEDs	16

- MaxxHeat Heated Lens Activated Automatically when the temperature drops below 45 °F (7 °C)
- Patented MaxxHeat® Technology
- US Patent No 11,339,947
- Built-In Heater – No Additional Wires
- Optimized Shade of Amber – for Long Range Visibility
- Dual Voltage 12/24VDC
- Polycarbonate Lens & Housing, Stainless Steel Bracket and Bolt
- 5 Year Warranty

800 LUMENS ROUND LED WORK LIGHT — POLYCARBONATE HOUSING



PART NUMBER	DESCRIPTION
MWL-19-B	ROUND WORK LIGHT – 800 LUMENS

Lumens	800	• Dual Voltage 12/24VDC
Voltage	12/24VDC	• Polycarbonate Lens & Housing – Noncorrosive
Amp Draw	0.7A 12V / 0.4A 24V	• Stainless Steel Bracket and Bolt
Dimensions	4.8" Diam. x 1.5" D	• Color Retail Packaging
Mounting	M8 Stainless Steel Bolt	• 5 Year Warranty
Connector	2 Jacketed Leads Blunt Cut, 11"	
LEDs	15	

900 LUMENS RECTANGULAR LED WORK LIGHT — POLYCARBONATE HOUSING



PART NUMBER	DESCRIPTION
MWL-26-B	RECTANGULAR WORK LIGHT – 900 LUMENS

Lumens	900	• Dual Voltage 12/24VDC
Voltage	12/24VDC	• Polycarbonate Lens & Housing – Noncorrosive
Amp Draw	0.7A 12V / 0.4A 24V	• Stainless Steel Bracket and Bolt
Dimensions	5.9" W x 3.7" H x 1.2" D	• Color Retail Packaging
Mounting	M8 Stainless Steel Bolt	• 5 Year Warranty
Connector	2 Jacketed Leads Blunt Cut, 11"	
LEDs	15	

1,200 LUMENS ROUND LED WORK LIGHT — POLYCARBONATE HOUSING



PART NUMBER	DESCRIPTION
MWL-38-A	ROUND WORK LIGHT – 1,200 LUMENS

Lumens	1,200	• Dual Voltage 12/24VDC
Voltage	12/24VDC	• Polycarbonate Lens & Housing – Noncorrosive
Amp Draw	1.2A 12V / 0.6A 24V	• Stainless Steel Bracket and Bolt
Dimensions	4.8" Diam. x 1.5" D	• Color Retail Packaging
Mounting	M8 Stainless Steel Bolt	• 5 Year Warranty
Connector	2 Jacketed Leads Blunt Cut, 11"	
LEDs	15	

LED WORK LIGHTS

1,300 LUMENS RECTANGULAR LED WORK LIGHT — POLYCARBONATE HOUSING



PART NUMBER DESCRIPTION

MWL-39-A RECTANGULAR WORK LIGHT – 1,300 LUMENS

Lumens	1,300	• Dual Voltage 12/24VDC
Voltage	12/24VDC	• Polycarbonate Lens & Housing – Noncorrosive
Amp Draw	1.3A 12V / 0.7A 24V	• Stainless Steel Bracket and Bolt
Dimensions	5.9" W x 3.7" H x 1.2" D	• Color Retail Packaging
Mounting	M8 Stainless Steel Bolt	• 5 Year Warranty
Connector	2 Jacketed Leads Blunt Cut, 11"	
LEDs	15	

1,400 LUMENS ROUND LED WORK LIGHT



UL
UL Recognized

PART NUMBER DESCRIPTION

MWL-28 ROUND WORK LIGHT – 1,400 LUMENS

UPGRADED SPECIFICATIONS

Lumens	1,400
Voltage	12/24VDC
Amp Draw	1.4A 12V / 0.7A 24V
Dimensions	4.7" Diam x 1.6" Deep
Mounting	5/16" Stainless Steel Bolt
Connector	2 Jacketed Leads Blunt Cut, 11"
LEDs	6

FEATURES

- Dual Voltage 12/24VDC
- Black Aluminum Housing
- Polycarbonate Lens
- UL Recognized
- Color Retail Packaging
- 5 Year Warranty

1,400 LUMENS RECTANGLE LED WORK LIGHT



PART NUMBER DESCRIPTION

MWL-29 RECTANGULAR WORK LIGHT – 1,400 LUMENS

UPGRADED SPECIFICATIONS

Lumens	1,400
Voltage	12/24VDC
Amp Draw	1.4A 12V / 0.7A 24V
Dimensions	5.9" W x 3.6" H x 1.5" D
Mounting	5/16" Stainless Steel Bolt
Connector	2 Jacketed Leads Blunt Cut, 11"
LEDs	6

FEATURES

- Dual Voltage 12/24VDC
- Black Aluminum Housing
- Polycarbonate Lens
- Color Retail Packaging
- 5 Year Warranty

LED WORK LIGHTS

1,400 LUMENS SQUARE LED WORK LIGHT



PART NUMBER	DESCRIPTION
MWL-30	SQUARE WORK LIGHT – 1,400 LUMENS

UPGRADED SPECIFICATIONS		FEATURES
Lumens	1,400	• Dual Voltage 12/24VDC
Voltage	12/24VDC	• Black Aluminum Housing
Amp Draw	1.4A 12V / 0.7A 24V	• Polycarbonate Lens
Dimensions	4.7" W x 4.2" H x 1.7" D	• Color Retail Packaging
Mounting	5/16" Stainless Steel Bolt	• 5 Year Warranty
Connector	2 Jacketed Leads Blunt Cut, 11"	
LEDs	6	

2,400 LUMENS ROUND LED WORK LIGHT



PART NUMBER	DESCRIPTION
MWL-41	ROUND WORK LIGHT – 2,400 LUMENS

Lumens	2,400	• Now 2,400 Lumens
Voltage	12/24VDC Dual Voltage	• Dual Voltage 12/24VDC
Amp Draw	2.4A 12V / 1.2A 24V	• Black Aluminum Housing
Dimensions	4.7" Diam. x 1.6" Deep	• Polycarbonate Lens & Housing
Mounting	5/16" Stainless Steel Bolt	• Stainless Steel Bracket and Bolt
Connector	2 Jacketed Leads Blunt Cut, 11"	• Color Retail Packaging
LEDs	16	• 5 Year Warranty

2,400 LUMENS SQUARE LED WORK LIGHT



PART NUMBER	DESCRIPTION
MWL-43	SQUARE WORK LIGHT – 2,400 LUMENS

Lumens	2,400	• Dual Voltage 12/24VDC
Voltage	12/24VDC Dual Voltage	• Now 2,400 Lumens
Amp Draw	2.4A 12V / 1.2A 24V	• Black Aluminum Housing
Dimensions	4.7" W x 4.2" H x 1.7" D	• Polycarbonate Lens & Housing
Mounting	5/16" Stainless Steel Bolt	• Stainless Steel Bracket and Bolt
Connector	2 Jacketed Leads Blunt Cut, 11"	• Color Retail Packaging
LEDs	16	• 5 Year Warranty

2,400 LUMENS RECTANGULAR LED WORK LIGHT



PART NUMBER	DESCRIPTION
MWL-42	RECTANGULAR WORK LIGHT – 2,400 LUMENS

Lumens	2,400
Voltage	12/24VDC Dual Voltage
Amp Draw	2.4A 12V / 1.2A 24V
Dimensions	5.9" W x 3.6" H x 1.5" D
Mounting	5/16" Stainless Steel Bolt
Connector	2 Jacketed Leads Blunt Cut, 11"
LEDs	16

- Now 2,400 Lumens
- Dual Voltage 12/24VDC
- Black Aluminum Housing
- Polycarbonate Lens & Housing
- Stainless Steel Bracket and Bolt
- Color Retail Packaging
- 5 Year Warranty

2,100 LUMENS DUAL FUNCTION LED WORK LIGHT / WARNING LIGHT



PART NUMBER	DESCRIPTION
MWL-42WYCL-DC	MULTI-FUNCTION WORK + WARN LIGHT

Lumens	2,100
Voltage	12/24VDC Dual Voltage
Amp Draw	2.6A 12V / 1.3A 36V
Dimensions	5.9" W x 3.6" H x 1.5" D
Mounting	5/16" Stainless Steel Bolt
Connector	4 Jacketed Leads Blunt Cut, 11"
LEDs	16 (12 White, 4 Amber)
SAE	J595 Class 1

- Dual Function Work Light / Flashing Warning Light
- 2,100 Lumens Work Light And Amber Flashing Warning Light – SAE Class 1
- Dual Color Warning: Amber Only or Amber/White
- 28 Selectable Programmable Flash Patterns
- 12/24VDC Dual Voltage
- Black Aluminum Housing & Polycarbonate Lens
- Stainless Steel Swivel Bracket & Bolt
- 5 Year Warranty



Amber
Flashing Warning Light



White
Work Light

2,400 LUMENS RECTANGULAR LED WORK LIGHT



Optional M50919
Extended Bracket

PART NUMBER	DESCRIPTION
MWL-50-A	RECTANGULAR WORK LIGHT – 2,400 LUMENS
M50919	OPTIONAL EXTENDED MOUNTING BRACKET

Lumens	2,400	• 12 - 36 VDC Multi-Voltage
Voltage	12 - 36 VDC Multi-Voltage	• Flood Beam Pattern
Amp Draw	2.1A 12V / 1.1A 24V	• Black Aluminum Housing
Dimensions	6.2" W x 3.8" H x 1.8" D	• Polycarbonate Lens
Mounting	M8 Stainless Steel Bolt	• Stainless Steel Bolt and Bracket
Connector	2 Jacketed Leads Blunt Cut, 12"	• Color Retail Packaging
LEDs	6	• 5 Year Warranty

3,200 LUMENS RECTANGULAR LED WORK LIGHT



Optional M50919
Extended Bracket

PART NUMBER	DESCRIPTION
MWL-57-A	RECTANGULAR WORK LIGHT – 3,200 LUMENS
M50919	OPTIONAL EXTENDED MOUNTING BRACKET

Lumens	3,200	• 12 - 36 VDC Multi-Voltage
Voltage	12 - 36 VDC Multi-Voltage	• Flood Beam Pattern
Amp Draw	3.3A 12V / 1.7A 24V	• Black Aluminum Housing
Dimensions	6.2" W x 3.8" H x 1.8" D	• Polycarbonate Lens
Mounting	M8 Stainless Steel Bolt	• Stainless Steel Bolt and Bracket
Connector	2 Jacketed Leads Blunt Cut, 12"	• Color Retail Packaging
LEDs	8	• 5 Year Warranty

2,900 LUMENS SQUARE LED WORK LIGHT



PART NUMBER	DESCRIPTION
MWL-16-A	SQUARE WORK LIGHT – 2,900 LUMENS

Lumens	2,900	• 10 LEDs / 2,900 Lumens
Voltage	12/24VDC Dual Voltage	• Flood Beam Pattern
Amp Draw	2.5A 12V / 1.2A 24V	• Dual Voltage 12/24VDC
Dimensions	4.6" W x 4.1" H x 3" D	• Polycarbonate Lens,
Mounting	5/16" Stainless Steel Bolt	Aluminum Housing
Connector	2 Jacketed Leads Blunt Cut, 10"	• Color Retail Packaging
LEDs	10	• 5 Year Warranty

LED WORK LIGHTS

3,600 LUMENS SQUARE LED WORK LIGHT



Integrated DT04 Connector



Includes Pigtail Connector

PART NUMBER	DESCRIPTION
MWL-64	SQUARE WORK LIGHT – 3,600 LUMENS

Lumens	3,600
Voltage	12/24VDC
Amp Draw	3.0A 12.8V / 1.5A 24V
Dimensions	5.3" W x 3.9"H x 2.3" D
Mounting	M10 Stainless Steel Bolt
Connector	Integrated DT04 Deutsch-style Includes DT06 Pigtail, 5" long, blunt cut
LEDs	9

- High Powered 3,600 Lumens Work Light
- 12/24VDC Dual Voltage
- 9 LEDs / 3,600 Lumens
- Deutsch-style connector cast into housing
- Includes pigtail connector, DT06 to blunt cut, 5" long
- Polycarbonate Lens, Cast Aluminum Housing
- 5 Year Warranty

NEW

7,000 LUMENS ULTRA BRIGHT LED WORK LIGHT



PART NUMBER	DESCRIPTION
MWL-62-A	SQUARE WORK LIGHT – 7,000 LUMEN

Lumens	7,000
Voltage	12/24VDC Dual Voltage
Amp Draw	7.0A 12V / 3.5A 24V
Dimensions	4.9" W x 4.3" H x 3.3"D
Mounting	M10 Stainless Steel Bolt
Connector	Integrated Deutsch DT04-Style Includes DT06 Pigtail, 5" Long Blunt Cut
LEDs	144

- Ultra High Output – 7,000 Lumens
- 110° Wide Flood Beam Angle
- 12/24VDC Dual Voltage
- Integrated Deutsch-Style Connector
- Pigtail Connector Included
- Cast Aluminum Housing, Polycarbonate Lens
- 5 Year Warranty



NEW

5,500 LUMENS ULTRA BRIGHT LED WORK LIGHT BAR



Includes Mating DT-Style Pigtail

PART NUMBER	DESCRIPTION
MWL-61-A	4" X 11" WORK LIGHT BAR – 5,500 LUMENS

Lumens	5,500
Voltage	12 - 36 VDC Multi-Voltage
Amp Draw	4.5A 12V / 2.3A 24V
Dimensions	10.6" W x 3.7" H x 2.4" D
Mounting	U-Bracket with (2) M8 Stainless Bolts
Connector	DT-04-2P Pigtail, 17" with Mating Connector, 5"
LEDs	56

- Work Light Bar on Swivel Bracket
- 5,500 Lumens
- 60° Flood Beam – Scene Light
- 12 - 36 VDC Multi-Voltage
- Polycarbonate Lens
- Cast Aluminum Housing
- Stainless Steel Mounting Hardware
- 5 Year Warranty

8,500 LUMENS MaxxBright SQUARE LED WORK LIGHT



DT Pigtail Included

PART NUMBER	DESCRIPTION
MWL-500	SQUARE WORK LIGHT – 8,500 LUMENS, BLACK
MWL-501	SQUARE WORK LIGHT – 8,500 LUMENS, WHITE

Lumens	8,500
Voltage	12/24VDC Dual Voltage
Amp Draw	8.0A 12V / 4.0A 24V
Dimensions	5.8" W x 4.7" H x 3.5" D 5.3" Overall H w/ Brkt.
Mounting	3 Bolts: 2 M8, 1 M10
Connector	Integrated Deutsch-style DT04, Includes DT06 Pigtail, 19"
LEDs	12

- MaxxBright High Powered Work Light
- 8,500 Lm Flood Beam / Scene Light
- Available in Black or White Housing
- Water-Tight Deutsch-Style Connector
- Mating Pigtail Connector Included
- Extra Heavy Duty Bail Mount Bracket
- 5 Year Warranty



Optional M50155
Adapter Bracket for Pole Mounting

9,500 LUMENS MaxxBright ROUND LED WORK LIGHT



DT Pigtail Included

PART NUMBER	DESCRIPTION
MWL-510	ROUND WORK LIGHT – 9,500 LUMENS, BLACK
MWL-511	ROUND WORK LIGHT – 9,500 LUMENS, WHITE

Lumens	9,500
Voltage	12/24VDC Dual Voltage
Amp Draw	8.0A 12V / 4.0A 24V
Dimensions	6" Diam. x 3.5" D 6.7" Overall H w/ Brkt.
Mounting	3 Bolts: 2 M8, 1 M10
Connector	Integrated Deutsch-style DT04, Includes DT06 Pigtail, 19"
LEDs	14

- MaxxBright High Powered Work Light
- 9,500 Lm Flood Beam / Scene Light
- Available in Black or White Housing
- Water-Tight Deutsch-Style Connector
- Mating Pigtail Connector Included
- Extra Heavy Duty Bail Mount Bracket
- 5 Year Warranty



Optional M50155
Adapter Bracket for Pole Mounting

19,000 LUMENS MaxxBright RECTANGULAR LED WORK LIGHT



DTP Pigtail Included

PART NUMBER	DESCRIPTION
MWL-520	RECTANGULAR WORK LIGHT – 19,000 LUMENS, BLACK
MWL-521	RECTANGULAR WORK LIGHT – 19,000 LUMENS, WHITE

Lumens	19,000
Voltage	12/24VDC Dual Voltage
Amp Draw	17.5A 12V / 8.7A 24V
Dimensions	13" W x 4.3" H x 3.5" D 4.9" Overall H w/ Brkt.
Mounting	3 Bolts: 2 M10, 1 M12
Connector	DTP04-Style on 12" Cable Includes DTP06 Pigtail, 7.5"
LEDs	29

- MaxxBright High Powered Work Light
- 19,000 Lm Flood Beam / Scene Light
- Available in Black or White Housing
- Water-Tight Deutsch-Style Connector
- Mating Pigtail Connector Included
- Extra Heavy Duty Bail Mount Bracket
- 5 Year Warranty



Optional M50155
Adapter Bracket for Pole Mounting

COMPACT LED WORK LIGHTS

1,450 LUMENS COMPACT 3" CUBE LED WORK LIGHT



PART NUMBER	DESCRIPTION
MWL-20-A	COMPACT CUBE LIGHT – 1,450 LUMENS, HARD-WIRED
MWL-20-AD	COMPACT CUBE LIGHT – 1,450 LUMENS, DT PIGTAIL

Lumens	1,450	• Compact 3" Cube Style Work Light
Voltage	12/24VDC Dual Voltage	• Available in Hard-Wired (-A), or Removable DT Pigtail (-AD)
Amp Draw	1.3A 12V / 0.7A 24V	
Dimensions	3.0"W x 2.8"H x 2.6"D (2.6" -AD Model)	• Includes 2 Sets of Mounting Brackets Standard U-Bracket & Extended Bracket
Mounting	M10 Stainless Steel Bolt	
Connector	2 Leads Blunt Cut, 15"	• Polycarbonate Lens, Aluminum Housing
- AD Model	Integrated DT04, and DT06 Pigtail	• Stainless Steel Bolt & Bracket
LEDs	4	• 5 Year Warranty

Rear -AD Model with Integrated DT-04 Receptacle



Optional Extended Bracket Included

IMPROVED

1,800 LUMENS COMPACT 3" SQUARE LED WORK LIGHT



PART NUMBER	DESCRIPTION
MWL-45-A	COMPACT 3" WORK LIGHT – 1,800 LUMENS

Lumens	1,800	• Compact 3" x 3" Work Light
Voltage	12/24VDC	• 1,800 Lumens
Amp Draw	1.5A 12V / 0.7A 24V	• Extra Wide Flood Beam Pattern
Dimensions	3.0" W x 3.0" H x 1.5" D	• 12/24VDC Dual Voltage
Mounting	5/16" Stainless Steel Bolt	• Polycarbonate Lens
Connector	2 Jacketed Leads Blunt Cut, 8"	• Cast Aluminum Housing
LEDs	24	• Stainless Steel Mounting Hardware
		• 5 Year Warranty

NEW

2,000 LUMENS COMPACT 3" ROUND LED WORK LIGHT



PART NUMBER	DESCRIPTION
MWL-70	COMPACT ROUND 6 LED WORK LIGHT 2,000 LUMENS

Lumens	2,000	• Compact 3.2" Round Work Light
Voltage	12/24VDC	• 2,000 Lumens
Amp Draw	1.9A 12V / 1.0A 24V	• Spot Beam Pattern
Dimensions	3.2" Diameter x 1.9" D	• 12/24VDC Dual Voltage
Mounting	5/16" Stainless Steel Bolt	• Polycarbonate Lens
Connector	2 Jacketed Leads Blunt Cut, 8"	• Cast Aluminum Housing
LEDs	6	• Stainless Steel Mounting Hardware
		• 5 Year Warranty

IMPROVED

1,000 LUMENS RECTANGULAR LED WORK LIGHT



PART NUMBER	DESCRIPTION
MWL-04	RECTANGULAR WORK LIGHT – 1,000 LUMENS
Lumens	1,000
Voltage	12/24VDC Dual Voltage
Amp Draw	0.9A 12V / 0.5A 24V
Dimensions	5.9" W x 3.6" H x 1.6" D
Mounting	5/16" Stainless Steel Bolt
Connector	2 Jacketed Leads Blunt Cut, 11"
LEDs	6

- Dual Voltage 12/24VDC
- Flood Beam Pattern
- Aluminum Powder Coated Housing
- Polycarbonate Lens
- Stainless Steel Bolt & Bracket
- 5 Year Warranty

1,500 LUMENS 5" ROUND LED WORK LIGHT



MWL-01Guard

PART NUMBER	DESCRIPTION
MWL-01B	ROUND WORK LIGHT – 1,500 LUMENS
MWL-01GUARD	OPTIONAL LENS COVER
Lumens	1,500
Voltage	12/24VDC Dual Voltage
Amp Draw	2.5A 12VDC / 1.3A 24VDC
Dimensions	5.0" Diam. x 1.8" Depth
Mounting	5/16" Stainless Steel Bolt
Connector	2 Jacketed Leads Blunt Cut, 11"
LEDs	6

- Dual Voltage 12/24VDC
- Flood Beam Pattern
- Aluminum Powder Coated Housing
- Polycarbonate Lens
- Stainless Steel Bolt & Bracket
- 5 Year Warranty

500 LUMENS RECTANGULAR LED WORK LIGHT




PART NUMBER	DESCRIPTION
MWL-21	THIN RECTANGULAR WORK LIGHT – 500 LUMENS
Lumens	500
Voltage	12.8VDC
Amp Draw	0.7A
Dimensions	4.4" W x 2.5" H x 1.1" D
Mounting	Adjustable Stainless Steel Bracket
Connector	2 Jacketed Leads Blunt Cut, 11"
LEDs	6


- Flood Beam Pattern
- Aluminum Powder Coated Housing
- Polycarbonate Lens
- Low LED Amp Draw
- Stainless Steel Bolt & Bracket
- 5 Year Warranty

LOW PROFILE LED WORK LIGHTS

2,100 LUMENS LOW-PROFILE LED WORK LIGHT

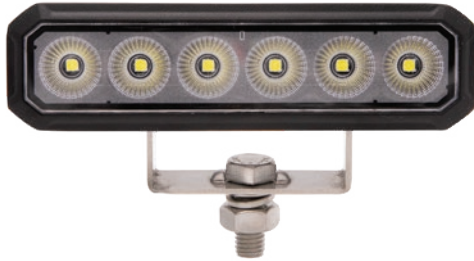

MWL-47



Adjustable Swivel Bracket



Top View

PART NUMBER	DESCRIPTION
MWL-47	5.75" LOW PROFILE WORK LIGHT – 2,100 LUMENS

Lumens	2,100
Voltage	12/24VDC
Amp Draw	1.6A 12.8V / 0.9A 24V
Dimensions	5-3/4" W x 1-5/8" H x 1-7/8" D
Mounting	M10 Stainless Steel Bolt
Connector	2 Leads Blunt Cut, 11"
LEDs	6

- Low-Profile – Only 1-5/8" Height
- 6 LEDs, and 2,100 Lumens
- Adjustable Swivel Mounting Bracket
- Stainless Steel Mounting and Hardware
- Polycarbonate Lens, Aluminum Housing
- 5 Year Warranty

2,900 LUMENS LOW-PROFILE LED WORK LIGHT



MWL-48



Adjustable Swivel Bracket



PART NUMBER	DESCRIPTION
MWL-48	8.5" LOW PROFILE WORK LIGHT – 2,900 LUMENS

Lumens	2,900
Voltage	12/24VDC
Amp Draw	2.2A 12.8V / 1.2A 24V
Dimensions	8-1/2" W x 1-5/8" H x 1-7/8" D
Mounting	M10 Stainless Steel Bolt
Connector	2 Leads Blunt Cut, 11"
LEDs	8

- Low-Profile – Only 1-5/8" Height
- 8 LEDs, and 2,900 Lumens
- Adjustable Swivel Mounting Bracket
- Stainless Steel Mounting and Hardware
- Polycarbonate Lens, Aluminum Housing
- 5 Year Warranty

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

LED WORK LIGHTS BARS

NEW



3,500 LUMENS 1.4" X 24" LED WORK LIGHT BAR



PART NUMBER	DESCRIPTION
MWBL-1-B	WORK LIGHT BAR 3,500 LUMENS 12/24VDC

Lumens	3,500	• Low Profile, 2-Foot Work Light bar
Voltage	12/24VDC Dual Voltage	• 3,500 Lumens Flood Beam
Amp Draw	3.8A 12V / 1.9A 24V	• 12/24 VDC Dual Voltage
Dimensions		• Universal L-Brackets Allow Swivel Adjust to Optimal Angle
- Light Only	24.25" W x 1.4" H x 1.3" D	• Aluminum Housing & Steel Brackets
- With Bracket	26.0" W x 1.8" H x 1.6" D	• Polycarbonate Lens
Mounting	2 Hole Surface, 21.2" C to C	• Replaces MWBL-1-A
Connector	2 Jacketed Leads Blunt Cut, 18"	• 5 Year Warranty
LEDs	80	

3,000 LUMENS LED WORK LIGHT BAR



MTBL-UBAR

PART NUMBER	DESCRIPTION
MTBL-10-A	WORK LIGHT BAR – 3,000 LUMENS
MTBL-UBAR	REPLACEMENT BAR ONLY

Lumens	3,000	• Jerr-Dan Over-Winch Work Light Bar Replacement
Voltage	12.8V	• Slim Profile – Light Head Only 1.4 inches tall
Amp Draw	3.4A	• Polycarbonate Lens
Dimensions		• 5 Year Warranty
- Light Only	24.3" W x 1.4" H x 1.3" D	
- With Bracket	29.5" W x 10.3" H x 2.0" D	
Mounting	Adjustable U-Bracket	
Connector	2 Jacketed Leads with Delphi Connector, 18"	
LEDs	120	

LED SCENE / UNDERCARRIAGE LIGHTS

SURFACE MOUNT LED SCENE LIGHTS / UNDERCARRIAGE LIGHTS



PART NUMBER	M84421-E	M84419-E	M84420-E	M84445-E	M84422-E
Description	24" Model	18" Model	13" Model	8" Model	4" Model
Lumens	1,700	1,300	850	500	180
Voltage	12.8VDC	12.8VDC	12.8VDC	12.8VDC	12.8VDC
Amp Draw	1.4A	1.1A	0.8A	0.5A	0.2A
Dimensions	23.8" L x 1.4" H x 1.4" D	18.3" L x 1.4" H x 1.4" D	13" L x 1.4" H x 1.4" D	8.6" L x 1.4" H x 1.4" D	4.4" L x 1.4" H x 1.4" D
Mounting	2 Hole 23-5/16" C to C	2 Hole 17-7/8" C to C	2 Hole 12-9/16" C to C	2 Hole 8-1/8" C to C	2 Hole 3-7/8" C to C
Connector	2 Leads .180 Bullets, 17"	2 Leads .180 Bullets, 17"	2 Leads .180 Bullets, 17"	2 Leads .180 Bullets, 17"	2 Leads .180 Bullets, 17"
LEDs	84	63	42	24	9


FEATURES

- Scene Light, Undercarriage Light, Compartment Light, or Work Light
- Sealed Waterproof IP-68
- Aluminum Housing with Rugged Nylon End Caps
- Includes Mounting Spacers which allow external cable routing
- 120-Degree Light Output
- Also Available in Bulk Pack (-X)
- 3 Year Warranty

SURFACE MOUNT DUAL FUNCTION LED SCENE LIGHT / WARNING LIGHT



2 Lights in one: Dual Color and Dual Function Light operates as a white scene light and also as a flashing amber/white warning light

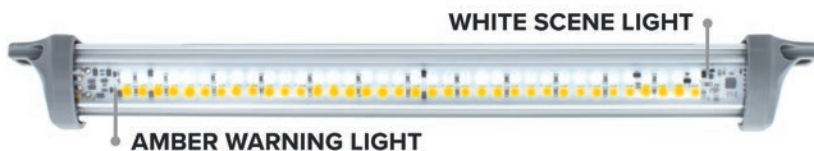

PART NUMBER	DESCRIPTION
M84420YWCL-DC	13" SCENE LIGHT/WARN LIGHT
Lumens	700
Voltage	12.8VDC
Amp Draw	0.9A
Dimensions	13" L x 1.4" H x 1.4" D
Mounting	2 Hole 12-9/16" Center to Center
Connector	4 Leads .180 Bullets, 17"
LEDs	72 (36 Amber, 36 White)
Legal Heading	W-1
SAE	J595 Class 1

- 700 Lumens White LED Scene Light / Undercarriage Light
- SAE Class 1 Amber LED Flashing Warning Light
- 28 Flash Patterns
- Aluminum Housing with Rugged Nylon End Caps
- Polycarbonate Lens
- Exterior Mount / Sealed IP68 Rated
- 3 Year Warranty

LED UNDERCARRIAGE LIGHT & SWITCHED LED WORK LIGHT

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

NEW



1,700 LUMENS SCENE LIGHT / UNDERCARRIAGE LIGHT — 90 DEGREE



PART NUMBER	DESCRIPTION
M84492-DX	UNDERCARRIAGE SCENE LIGHT, 90-DEGREE, 23.8" – BULK PACK

Lumens	1,700	• Exterior Undercarriage / Scene Light
Voltage	12.8VDC	• Sealed, Waterproof, IP-68 Rated
Amp Draw	1.4A	• Perfect for Ground Illumination
Dimensions	23.8" W x 1.7" H x 1.6" D	• Improve Driver Safety
Mounting	2 Hole Surface, 23-3/8" C to C	• Aluminum Housing with Nylon End Caps
Connector	2 Jacketed Leads, 96"	• Bulk Pack Only
LEDs	84	• 5 Year Warranty

4,200 LUMENS ADJUSTABLE LED WORK LIGHT WITH ON/OFF SWITCH



PART NUMBER	DESCRIPTION
MWL-36-A	ADJUSTABLE WORK LIGHT – 4,200 LUMENS

Lumens	4,200
Voltage	12/24VDC Dual Voltage
Amp Draw	3.6A 12V / 1.8A 24V
Dimensions	4.6" Diam. x 3.2" Deep (Light Only) 4.6" W x 9.4" H x 3.2" D Overall
Mounting	4 Hole Surface, 3.7" x 0.85" C to C, with Swivel Bracket
Connector	Hardwired 11" Pigtail with DT04 Plug
LEDs	9

- Adjustable Work Light on Swivel Base
- Integrated On/Off Switch on Back of Light
- High Power – 4,200 Lumens
- 12/24VDC Dual Voltage
- Polycarbonate Lens & Aluminum Housing
- Stainless Steel Bracket & Bolt
- 5 Year Warranty

LED SURFACE MOUNT & LED SCENE LIGHTS

1,500 LUMENS & 2,500 LUMENS 90-DEGREE LED SURFACE MOUNT WORK LIGHT




MWL-52 Black Housing 2,500 Lumens




MWL-51LS Silver Housing 1,500 Lumens



90-Degree Off-Axis Lighting



Includes Mounting Gasket



Includes Optional Stand-Off Bracket



Excellent for Ground Illumination


PART NUMBER	DESCRIPTION
MWL-51LS	11" X 2" WORK LIGHT 90-DEGREE SURFACE MOUNT, SILVER HOUSING – 1,500 LUMENS
MWL-52	11" X 2" WORK LIGHT 90-DEGREE SURFACE MOUNT, BLACK HOUSING – 2,500 LUMENS

SPECIFICATIONS	MWL-51LS	MWL-52	FEATURES
Lumens	1,500	2,500	<ul style="list-style-type: none"> • 90-Degree Lighting • 1,500 Lumen (-51LS) / 2,500 Lumen (-52) • 12/24VDC Dual Voltage • Includes Gasket and Stand-Off Bracket • Polycarbonate Lens & Aluminum Housing • Retail Packaging • 5 Year Warranty
Voltage	12/24VDC	12/24VDC	
Amp Draw	1.8A 12V / 0.9A 24V	2.4A 12V / 1.2 24V	
Dimensions	10.7" W x 1.6" H x 1.8" D	10.7" W x 1.6" H x 1.8" D	
Mounting	2 Hole Surface, 10" C to C	2 Hole Surface, 10" C to C	
Connector	2 Leads Blunt Cut, 11"	2 Leads Blunt Cut, 11"	
LEDs	8	8	

1,600 AND 2,600 LUMENS LED WORK LIGHT / SCENE LIGHT / LOAD LIGHT



MWL-65

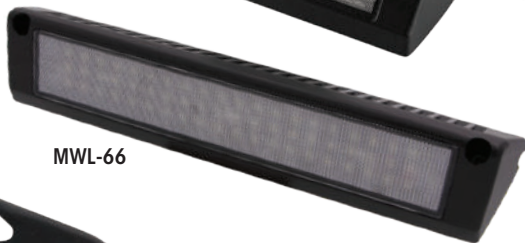

MWL-66



45° Degree Down Angle

PART NUMBER	DESCRIPTION
MWL-65	2.7" X 9" SCENE LIGHT – 1,600 LUMENS
MWL-66	2.7" X 13" SCENE LIGHT – 2,600 LUMENS

SPECIFICATIONS	MWL-65	MWL-66
Lumens	1,600	2,600
Voltage	12/24VDC	12/24VDC
Amp Draw	1.9A 12V / 1.0A 24V	2.7A 12V / 1.4A 24V
Dimensions	9" W x 2.7" H x 2" D	13" W x 2.7" H x 2" D
Mounting	2 Hole Surface 7.25" C to C	2 Hole Surface 11.2" C to C
Connector	2 Leads Blunt Cut, 19"	2 Leads Blunt Cut, 19"
LEDs	36	60

- Exterior Mount Scene Light, Load Light, Work Light
- 1,600 Lumens (MWL-65) or 2,600 Lumens (MWL-66)
- Beam Directed at a 45° Downward Angle
- 12/24VDC Dual Voltage
- Polycarbonate Lens, Cast Aluminum Housing
- 5 Year Warranty

LED SURFACE MOUNT SCENE LIGHTS

NEW

1,100 LUMENS AMBER OR WHITE LED WORK LIGHT / SCENE LIGHT



Illuminated White



Illuminated Amber

PART NUMBER	DESCRIPTION
MWL-32-YWCL	1.8" X 6" SCENE / LOAD LIGHT AMBER WHITE CLEAR LENS

Lumens	1,100
Voltage	12/24VDC Dual Voltage
Amp Draw	White 1.2A 12V / Amber 0.8A 12V
Dimensions	5.9" W x 1.8" H x 1.4" D
Mounting	2 Hole Surface, 5.3" C to C
Connector	3 Leads Blunt Cut, 16"
LEDs	52 (29 White, 23 Amber)

- Dual Color, Amber & White, Scene Light
- Amber Light is DOT Compliant P2 P3 Clearance Marker
- White Light is 1,100 Lumens
- Light is Directed Downward at Approx. 45° Angle
- Dedicated Wires for Each Color, Amber & White
- Polycarbonate Lens
- Chrome Plated Cast Aluminum Housing
- Mounting Gasket & Stainless Screws Included
- 5 Year Warranty




Side View

NEW

1,800 LUMENS LED WORK LIGHT / SCENE LIGHT



NEW

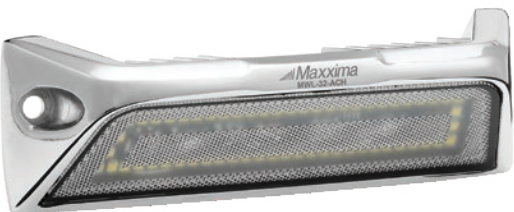

45° Downward Angle

PART NUMBER	DESCRIPTION
MWL-32-A	1.8" X 6" EXTERIOR SCENE / LOAD LIGHT 1,800 LUMENS
MWL-32-ACH	1.8" X 6" EXTERIOR SCENE / LOAD LIGHT 1,800 LUMENS

Lumens	1,800
Voltage	1.6A 12V / 0.8A 24V
Amp Draw	1.6A 12V / 0.8A 24V
Dimensions	5.9" W x 1.8" H x 1.4" D
Mounting	2 Hole Surface, 5-9/32" Center to Center
Connector	2 Jacketed Leads Blunt Cut, 16"
LEDs	58

- Black Housing MWL-32-A
- Chrome Housing MWL-32-ACH
- Exterior Scene Light / Work Light / Load Light
- 1,800 Lumens
- **Flood Beam Pattern**
- 12/24VDC Dual Voltage
- Polycarbonate Lens, Cast Aluminum Housing
- Stainless Steel Mounting Hardware & Gasket
- 5 Year Warranty

LED SURFACE MOUNT SCENE LIGHTS


400 LUMENS 2" X 5" EXTERIOR SURFACE MOUNT LED WORK/SCENE LIGHT



PART NUMBER	DESCRIPTION
MWL-33	RECTANGULAR SCENE LIGHT – 400 LUMENS
M50140	OPTIONAL ADHESIVE GASKET

Lumens	400	• Cast Aluminum Housing
Voltage	12.8VDC	• Polycarbonate Lens
Amp Draw	0.5A 12.8VDC	• 5 Year Warranty
Dimensions	5.2" W x 2.2" H x 0.7" D	
Mounting	4 Hole Surface	
Connector	2 Leads Blunt Cut, 12"	
LEDs	9	

1,400 LUMENS 2" X 9" EXTERIOR SURFACE MOUNT LED WORK/SCENE LIGHT

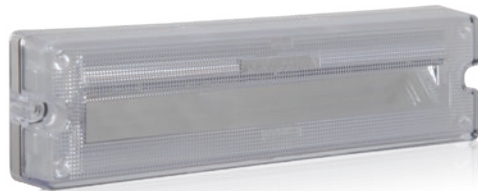

PART NUMBER	DESCRIPTION
MWL-34	RECTANGULAR SCENE LIGHT – 1,400 LUMENS

Lumens	1,400	• Cast Aluminum Housing
Voltage	12/24VDC	• Polycarbonate Lens
Amp Draw	1.4A 12.8V / 0.7A 24V	• Mounting Gasket Attached
Dimensions	9.0" W x 2.2" H x 0.9" D	• 5 Year Warranty
Mounting	2 Hole Surface	
Connector	2 Leads Blunt Cut, 12"	
LEDs	24	

1,500 LUMENS 4" X 6" EXTERIOR SURFACE MOUNT LED WORK/SCENE LIGHT



PART NUMBER	DESCRIPTION
MWL-35	RECTANGULAR SCENE LIGHT – 1,500 LUMENS

Lumens	1,500	• Cast Aluminum Heat Sink
Voltage	12/24VDC	• Polycarbonate Lens
Amp Draw	1.4A 12.8V / 0.7A 24V	• Mounting Gasket Attached
Dimensions	6.0" W x 4.0" H x 0.9" D	• 5 Year Warranty
Mounting	4 Hole Surface	
Connector	2 Leads Blunt Cut, 11"	
LEDs	24	

SEE PAGE 35 FOR MORE SURFACE MOUNT SCENE LIGHTS



M84462



M84464

LED SURFACE MOUNT & GROMMET MOUNT WORK LIGHTS

590 AND 820 LUMENS 2" X 6" EXTREME CONDITIONS SURFACE MOUNT LED WORK LIGHT



Optional M50126 Swivel Bracket

PART NUMBER	DESCRIPTION
MWL-13-A	SURFACE MOUNT WORK LIGHT – 590 LUMENS
MWL-14-A	SURFACE MOUNT WORK LIGHT – 820 LUMENS
M50126	OPTIONAL SWIVEL BRACKET

SPECIFICATIONS	MWL-13-A	MWL-14-A
Lumens	590	820
Voltage	12/24VDC Dual Voltage	12/24VDC Dual Voltage
Amp Draw	0.6A 12V / 0.3A 24V	0.8A 12V / 0.4A 24V
Dimensions	5.9" W x 2.2" H x 0.9" D	5.9" W x 2.2" H x 0.9" D
Mounting	2 Hole Surface	2 Hole Surface
Connector	2 Leads Blunt Cut, 11"	2 Leads Blunt Cut, 11"
LEDs	6	8

- Low Profile Surface Mount Work Light
- Aluminum Housing
- High Temp, Tempered Glass Lens
- Extreme Wide Angle Beam
- 5 Year Warranty

550 LUMENS 6" OVAL GROMMET MOUNT LED WORK LIGHT — BULK PACK ONLY



PART NUMBER	DESCRIPTION
MWL-63-X	6" OVAL WORK LIGHT – 550 LUMENS, BULK PACK

Lumens	550	• 6" Oval Grommet Mount Work Light
Voltage	12.8VDC	• 550 Lumens
Amp Draw	0.5A	• DryFit Connector
Dimensions	6.45" W x 2.26" H x 0.83" D	• Polycarbonate Lens
Mounting	6" Oval Grommet	• 5 Year Warranty
Connector	DryFit	
LEDs	12	

750 LUMENS 2" ROUND GROMMET MOUNT MINI LED WORK LIGHT



MWL-12 Rear

M50412

PART NUMBER	DESCRIPTION
MWL-12	LAMP ONLY – 750 LUMENS
MRH-11	HOUSING ONLY
M50412	ANGLED GROMMET

Lumens	750	• Dual Voltage 12/24VDC
Voltage	12/24VDC Dual Voltage	• Flood Beam Pattern
Amp Draw	1.6A 12V / 0.9A 24V	• Aluminum Lamp Housing
Dimensions	4.4" Diam.	• Black Rubber Outer Housing
Mounting	5/16" Stainless Steel Bolt	• Polycarbonate Lens
Connector	1 Jacketed Leads Blunt Cut, 11"	• Retrofits ANSI 4411, PAR 36
LEDs	6	• 5 Year Warranty

LED INTERIOR LIGHTS



-
- INTERIOR DOME LIGHTS
 - RIGID LINEAR STRIP LIGHTS
 - FLEXIBLE STRIP LIGHTS
 - COURTESY LIGHTS

IMPROVED

5.5" ROUND SURFACE MOUNT LED DOME LIGHTS



PART NUMBER	DESCRIPTION
M84406-C	600 LUMENS DOME LIGHT
M84405-C	450 LUMENS DOME LIGHT

SPECIFICATION	M84406-C	M84405-C	
Lumens	600	450	• Available in 450 or 600 Lumens
Voltage	12.8VDC	12.8VDC	• Notched Base for Cable Exit
Amp Draw	0.6A	0.4A	• Polycarbonate Lens & Housing
Dimensions	5.5" Diam. x 0.8" D	5.5" Diam. x 0.8" D	• 5 Year Warranty
Mounting	3 Hole, 5" Bolt Circle	3 Hole, 5" Bolt Circle	
Connector	2 Leads Blunt Cut, 13"	2 Leads Blunt Cut, 13"	
LEDs	27	18	

NEW



5.5" ROUND SURFACE MOUNT LED DOME LIGHTS — PIR MOTION SENSOR



PIR Motion Sensor

M84406PIR-ADX

PART NUMBER	DESCRIPTION
M84406PIR-AX	600 LUMENS DOME LIGHT WITH PIR SENSOR – BULK PACK
M84406PIR-ADX	600 LUMENS DOME LIGHT WITH PIR SENSOR, APTIV PLUG – BULK PACK

Lumens	600	• 600 Lumens
Voltage	12.8VDC	• Auto On/Auto Off
Amp Draw	0.6A	• PIR Motion Sensor
Dimensions	5.5" Diam. x 1.0" D	• 3 Minute Auto Shut Off
Mounting	3 Hole, 5" Bolt Circle	• Notched Base for Cable Exit
Connector		• Polycarbonate Lens & Housing
- AX	2 Leads Blunt Cut, 13"	• 5 Year Warranty
- ADX	Delphi Aptiv # 120109793, 12" Length	
LEDs	24	

5.5" ROUND SURFACE MOUNT LED DOME LIGHTS — THIN PROFILE



PART NUMBER	DESCRIPTION
M84443	450 LUMENS DOME LIGHT

Lumens	450	• Ultra Thin Profile
Voltage	12.8VDC	• Includes White Bezel
Amp Draw	430mA	• Optional Chrome Bezel
Dimensions	5.7" Diam. x 0.4" D	• Polycarbonate Lens & Housing
Mounting	3 Hole, 5" Bolt Circle	• 5 Year Warranty
Connector	2 Leads Blunt Cut, 12"	
LEDs	36	

LED INTERIOR LIGHTING

6" ROUND SURFACE MOUNT RED/WHITE LED DOME LIGHT WITH ON/OFF SWITCH



PART NUMBER	DESCRIPTION
M84434RW-A	RED/WHITE DOME LIGHT WITH ON/OFF SWITCH

Lumens	200 (White)	• 3 Position Rocker Switch
Voltage	12.8VDC	White/Off/Red
Amp Draw	240mA White / 300mA Red	• 200 Lumens (White)
Dimensions	5.9" Diam. x 1.2" Depth	• Polycarbonate Lens
Mounting	3 Hole Surface, 5" Bolt Circle	• Aluminum Housing
Connector	2 Leads Blunt Cut, 12"	• Wire Channel Guide for Flat Surface Mounting
LEDs	48 (24 Red / 24 White)	• 5 Year Warranty

6" ROUND SURFACE MOUNT LED DOME LIGHTS



PART NUMBER	DESCRIPTION
M84434-A	1,400/600 LUMENS DOME LIGHT WITH ON/OFF SWITCH

Lumens	1,400 HI / 600 LO	• 1,400 Lumens
Voltage	12/24VDC	• Three Position HI/OFF/LO Rocker Switch
Amp Draw	12V: 1.4A HI / 0.5A LO	• Dual Voltage 12/24VDC
Dimensions	5.9"Diam. x 1.2" Depth	• Polycarbonate Lens &
Mounting	3 Hole Surface, 5" Bolt Circle	• Aluminum Housing
Connector	2 Leads Blunt Cut, 12"	• Wire Channel Guide for Flat Surface Mounting
LEDs	42	• 5 Year Warranty

NEW

6" ROUND SURFACE MOUNT LED DOME LIGHTS



NEW

PART NUMBER	DESCRIPTION
M84435-A	1,400 LUMENS DOME LIGHT
M84435-AX	1,400 LUMENS DOME LIGHT – BULK PACK

Lumens	1,400	• 1,400 Lumens
Voltage	12/24VDC	• Dual Voltage 12/24VDC
Amp Draw	1.5A 12V / 0.8A 24V	• Polycarbonate Lens &
Dimensions	5.9"Diam. x 1.2" Depth	• Aluminum Housing
Mounting	3 Hole Surface, 5" Bolt Circle	• Wire Channel Guide for Flat Surface Mounting
Connector	2 Leads Blunt Cut, 12"	• 5 Year Warranty
LEDs	42	

LED INTERIOR LIGHTING

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

8" ROUND FLUSH MOUNT 1,400 / 300 LUMENS LED DOME LIGHTS



PART NUMBER	DESCRIPTION
M84448	8" DOME LIGHT, HI/LO – WHITE FLANGE
M84449	8" DOME LIGHT, HI/LO, BRUSHED ALUM. W/ 3CCT

Lumens	1,400 HI / 300 LO	• HI/LO – 1,400 / 300 Lumens
Voltage	12.8VDC	• Direct Replacement for Many Popular Ambulance Lights
Amp Draw	1.0A / 0.2A	• 3 Discrete Wires for HI/LO Switch
Dimensions	8.6" Diam x 0.56" D	• Available in White or Alum. Flange
Mounting	4 Hole Flush, 8" Bolt Circle, 7.3" Cutout	• M84449: 3-pos. CCT Switch, Selectable Color Temp. 3,000K, 4,000K, 5,000K
Connector	3 Pin, Rectangular AMP-Style Mate-N-Lock Connector, 7" Lead	• Universal 8" Bolt Pattern
LEDs	51 (M84448) 102 (M84449)	• Frosted Lens – No Hot Spots • Polycarbonate Lens • Aluminum Housing • 5 Year Warranty

3" ROUND LOW PROFILE 150 LUMENS SURFACE MOUNT LED INTERIOR LIGHT



PART NUMBER	DESCRIPTION
M84441	150 LUMENS INTERIOR LIGHT
M8441-X	150 LUMENS INTERIOR LIGHT – BULK PACK
M50135	OPTIONAL CHROME BEZEL

Lumens	150	• Ultra Thin Profile
Voltage	12.8VDC	• Includes White Bezel
Amp Draw	250mA	• Optional Chrome Bezel
Dimensions	3.0" Diam. x 0.3" D	• Polycarbonate Lens & Housing
Mounting	4 Hole Surface	• 5 Year Warranty
Connector	2 Leads Blunt Cut, 12"	
LEDs	15	

4" ROUND LOW PROFILE 450 LUMENS 4" GROMMET MOUNT LED DOME LIGHT




PART NUMBER	DESCRIPTION
M84436	450 LUMENS 4" GROMMET MOUNT DOME LIGHT

Lumens	450	• Thin 0.5" Low Profile Design
Voltage	12.8VDC	• Strain Relief Clip
Amp Draw	480mA	• Completely Sealed
Dimensions	4.3" Diam. x 0.5" D	• Polycarbonate Lens & Housing
Mounting	4" Grommet	• 5 Year Warranty
Connector	2 Leads Blunt Cut, 13"	
LEDs	24	

LED INTERIOR LIGHTING

NEW

3" X 6" LED INTERIOR LIGHT HIGH OUTPUT 650 LUMENS

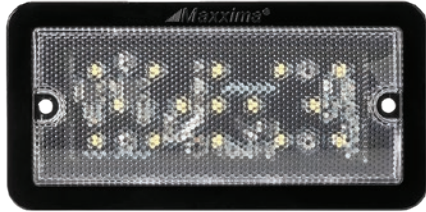

M84427-B



M84427-SW



M84427-PIR


NEW

PART NUMBER	DESCRIPTION
M84427-B	650 LUMENS DOME LIGHT
M84427-BX	650 LUMENS DOME LIGHT, 12V ONLY – BULK PACK
M84427-SW	650 LUMENS DOME LIGHT WITH ON/OFF SWITCH
M84427-PIR	650 LUMENS DOME LIGHT WITH PIR SENSOR

Lumens	650
Voltage	12/24VDC (-BX 12V Only)
Amp Draw	0.6A 12V / 0.3A 24V
Dimensions	5.8" W x 2.9" H x 0.9" D
Mounting	2 Holes, 4.7" C to C
Connector	2 Leads Blunt Cut, 9"
LEDs	14

- Available in 3 Configurations:
 - Base Model (-B)
 - Illuminated Touch Switch (-SW)
 - PIR Motion Sensor (-PIR)
- M84427-BX 12V Only
- Other Models Dual Voltage 12/24VDC
- Refrigeration/Moisture Safe
- Polycarbonate Frosted Lens & Housing
- Notched Base for Wire Exit
- 5 Year Warranty

3" X 6" LED INTERIOR LIGHT 275 LUMENS

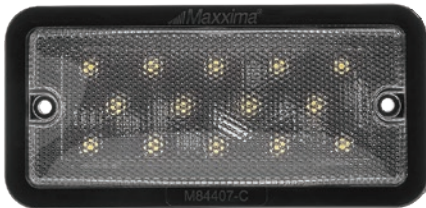

M84407-C

PART NUMBER	DESCRIPTION
M84407-C	275 LUMENS DOME LIGHT

Lumens	275
Voltage	12.8VDC
Amp Draw	250mA
Dimensions	5.8" W x 2.9" H x 0.9" D
Mounting	2 Holes, 4.7" C to C
Connector	2 Leads Blunt Cut, 9"
LEDs	14

- Refrigeration/Moisture Safe
- Polycarbonate Frosted Lens & Housing
- Notched Base for Wire Exit
- 5 Year Warranty

1.4" X 6" COMPACT LED INTERIOR LIGHT 260 LUMENS



PART NUMBER	DESCRIPTION
M84446BLK	260 LUMENS DOME LIGHT

Lumens	260
Voltage	12.8VDC
Amp Draw	230mA
Dimensions	5.8" W x 1.4" H x 1.0" D
Mounting	2 Holes, 4-3/4" C to C
Connector	2 Leads Blunt Cut, 15"
LEDs	15

- Compact Design – Only 1.4" Wide
- Compartment Light for Work Vans
- Two Hole Mount – Hidden Screws
- Slotted Base for Cable Routing
- Polycarbonate Lens & Housing
- 5 Year Warranty

LED DOME LIGHTS *or* EXTERIOR SCENE LIGHTS

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

NEW

6" MODELS — M84461-SERIES DOME LIGHTS



M84461-PIR

PART NUMBER	DESCRIPTION
M84461	550 LUMENS 6" DOME LIGHT
M84461-PIR	550 LUMENS 6" DOME LIGHT – PIR SENSOR

Lumens	550	• Interior <i>or</i> Exterior Use – IP67 Rated
Voltage	12/24VDC Dual Voltage	• 550 Lumen Flood Beam
Amp Draw	0.5A 12V / 0.3A 24V	• Available with or w/o PIR Sensor
Dimensions	6.0" W x 2.4" H x 0.5" D (0.7" D -PIR Model)	• PIR Model – 3-Min. Timer
Mounting	2 Hole Surface, 5.6" C to C	• Sleek Black Cast Aluminum Housing
Connector	2 Leads, Blunt Cut, 12"	• Polycarbonate Lens
LEDs	14	• Mounting Screws Included
		• 5 Year Warranty

NEW

8" MODELS — M84463-SERIES DOME LIGHTS



M84463-PIR

PART NUMBER	DESCRIPTION
M84463	1,050 LUMENS 8" DOME LIGHT
M84463-PIR	1,050 LUMENS 8" DOME LIGHT - PIR SENSOR

Lumens	1,050	• Interior <i>or</i> Exterior Use – IP67 Rated
Voltage	12/24VDC Dual Voltage	• 1,050 Lumen Flood Beam
Amp Draw	1.0A 12V / 0.5A 24V	• Available with or w/o PIR Sensor
Dimensions	8.0" W x 2.4" H x 0.5" D (0.7" D -PIR Model)	• PIR Model – 3-Min. Timer
Mounting	2 Hole Surface, 7.6" C to C	• Sleek Black Cast Aluminum Housing
Connector	2 Leads, Blunt Cut, 12"	• Polycarbonate Lens
LEDs	26	• Mounting Screws Included
		• 5 Year Warranty

NEW

6" & 8" MODELS — M84462 & M84464 SCENE LIGHT / PORCH LIGHT



45° Down Angle

PART NUMBER	DESCRIPTION
M84462	400 LUMENS 6" DOME LIGHT - 45° DOWN ANGLE
M84464	850 LUMENS 8" DOME LIGHT - 45° DOWN ANGLE

Lumens		• Interior <i>or</i> Exterior Use – IP67 Rated
- M84462	400	• 400 & 850 Lumen Flood Beam
- M84464	850	• 45° Down Angle Lighting - Perfect for Scene Light, Porch Light, or for Interior Illumination
Voltage	12/24VDC Dual Voltage	• Sleek Black Cast Aluminum Housing
Amp Draw		• Polycarbonate Lens
- M84462	0.5A 12V / 0.3A 24V	• Mounting Screws Included
- M84464	1.0A 12V / 0.5A 24V	• 5 Year Warranty
Dimensions		
- M84462	6.0" W x 2.1" H x 0.6" D	
- M84464	8.0" W x 2.1" H x 0.6" D	
Mounting		
- M84462	2 Hole Surface, 5.6" C to C	
- M84464	2 Hole Surface, 7.6" C to C	
Connector	2 Leads, Blunt Cut, 12"	
LEDs	14 M84462 / 26 M84464	

LED INTERIOR LIGHTING

14" SURFACE MOUNT LED DOME LIGHT WITH ON/OFF SWITCH



PART NUMBER	DESCRIPTION
M84400	315 LUMENS DOME LIGHT WITH ON/OFF SWITCH
Lumens	315
Voltage	12.8VDC
Amp Draw	0.5A
Dimensions	14.0" W x 3.6" H x 0.7" D
Mounting	Two Hole Surface
Connector	3 Leads Blunt Cut, 7"
LEDs	50

- 3 Position Remote/ON/Off Switch
- 2 Hole Surface Mount
- Low Amp Draw
- 5 Year Warranty

INTERIOR WHITE LED FLAT PANEL LIGHTING — ULTRA THIN DESIGN



PART NUMBER	DESCRIPTION
M84411-C	450 LUMENS, 4" X 6" DOME LIGHT
Lumens	450
Voltage	12.8VDC
Amp Draw	0.3A
Dimensions	3.9" W x 5.9" H
Depth	0.3"
Mounting	4 Hole Surface
Connector	2 Leads Blunt Cut, 8"
LEDs	18

- Stack Free LED Design
- Even Light Dispersion
- No Hot Spots
- Flat Screen Lens
- Ultra Thin 1/2" Design
- Black Powder Coated Frame
- 5 Year Warranty

23" SURFACE MOUNT LED INTERIOR LIGHT



M84426



M84426-SW

M84426-SW
3-Position Switch

PART NUMBER	DESCRIPTION
M84426	2,400 LUMENS DOME LIGHT WHITE HOUSING
M84426-SW	2,400/900 LUMENS DOME LIGHT WHITE HOUSING – 3 POSITION SWITCH

Lumens	
- M84426	2,400
- M84426-SW	2,400 / 900
Voltage	12/24VDC
Amp Draw	1.8A 12V / 1.0A 24V
Dimensions	22.8" W x 5.8" H x 1.3" D
Mounting	4 Hole Surface
Connector	2 Leads Blunt Cut, 8"
LEDs	216


- Available in 2 Configurations
- With or Without Switch
- M84426-SW Includes 3-Position HI/OFF/LO Switch
- Hidden Mounting Screws
- Bright Cool White Light Output
- Polycarbonate Frosted Lens
- 5 Year Warranty

18" FLUSH MOUNT 2,100 LUMENS LED CARGO LIGHT



PART NUMBER	DESCRIPTION	
M84415-B	2,100 LUMENS FLUSH DOME LIGHT	
Lumens	2,100	• Improved to 2,100 Lumens
Voltage	12.8VDC	• Refrigeration / Moisture Safe
Amp Draw	1.9A	• Universal Bolt Holes Replaces Several Popular Brands
Dimensions	18.2" W x 5.3" H x 1.2" D	• Frosted Lens
Mounting	4 Hole Flush Mount	• Polycarbonate Lens & Housing
Connector	2 Leads Blunt Cut, 12"	• 5 Year Warranty
LEDs	60	

18" FLUSH MOUNT 1,700 LUMENS LED CARGO LIGHT WITH PIR SENSOR

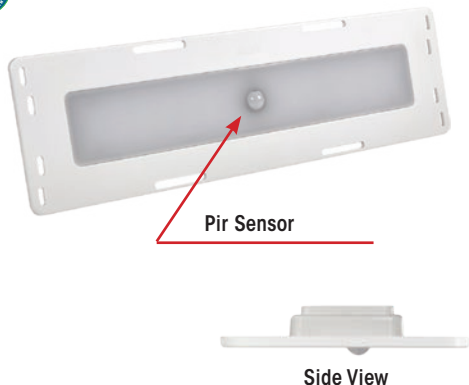

PART NUMBER	DESCRIPTION	
M84444-A	1,700 LUMENS FLUSH DOME LIGHT W/ PIR SENSOR	
Lumens	1,700	• Improved to 1,700 Lumens
Voltage	12.8VDC	• PIR Sensor – 3 Minute Timer
Amp Draw	1.5A	• Refrigeration / Moisture Safe
Dimensions	18.2" W x 5.3" H x 1.2" D	• Universal Bolt Holes Replaces Several Popular Brands
Mounting	4 Hole Flush Mount	• Frosted Lens
Connector	2 Leads Blunt Cut, 12"	• Polycarbonate Lens & Housing
LEDs	48	• 5 Year Warranty

2" X 2-3/4" 450 LUMENS FORD TRANSIT REPLACEMENT LED DOME LIGHT



PART NUMBER	DESCRIPTION	
M84455	2" X 2-3/4" DOME LIGHT FORD TRANSIT REPLACEMENT	
Lumens	450	• Direct Replacement for Ford Transit or Similar
Voltage	12.8VDC	• 450 Lumens
Amp Draw	0.4A	• Easy Snap-In Mount
Dimensions	2.8" L x 2" W x 1.1" D	• Polycarbonate Lens & Aluminum Heat Sink
Mounting	Snap-In, 2.4" x 1.3" Cutout	• 5 Year Warranty
Connector	2 Spade Connectors, 0.25"	
LEDs	18	

LED INTERIOR LIGHTING

LOW PROFILE LED RIGID LINEAR STRIP LIGHTS

5



PART NUMBER	M84454	M84450	M84451	M84452	M84453
DESCRIPTION	12" RIGID STRIP	18" RIGID STRIP	24" RIGID STRIP	36" RIGID STRIP	48" RIGID STRIP
Lumens	470	650	900	1,400	1,800
Voltage	12.8VDC	12.8VDC	12.8VDC	12.8VDC	12.8VDC
Amp Draw	0.6A	0.8A	1.2A	1.7A	2.0A
Length	13.4" L	19.2" L	25.3" L	37.1" L	48.8" L
W x D	0.9" W x 0.4" D	0.9" W x 0.4" D	0.9" W x 0.4" D	0.9" W x 0.4" D	0.9" W x 0.4" D
Mounting	13" C to C	18-7/8" C to C	24-3/4" C to C	36-9/16" C to C	48-3/8" C to C
Connector	2 Wires Blunt Cut, 6"	2 Wires Blunt Cut, 6"	2 Wires Blunt Cut, 6"	2 Wires Blunt Cut, 6"	2 Wires Blunt Cut, 6"
LEDs	36	48	72	101	144

FEATURES

- Available in 5 Popular Sizes
- Ultra Low Profile Design
- Frosted Lens with Wide Beam Angle
- ABS Body & Polycarbonate Lens
- Aluminum Base
- 5 Year Warranty

45-DEGREE ANGLED LED RIGID LINEAR STRIP LIGHTS

5



PART NUMBER	M84456-D	M84457-D	M84458-D	M84459-D	M84460-D
DESCRIPTION	12" STRIP	18" STRIP	24" STRIP	36" STRIP	48" STRIP
Lumens	600	800	1,100	1,600	2,000
Voltage	12.8VDC	12.8VDC	12.8VDC	12.8VDC	12.8VDC
Amp Draw	0.6A	0.8A	1.2A	1.7A	2.0A
Length	13.4" L	19" L	25.3" L	37.1" L	48.4" L
W x D	0.6" W x 0.6" H	0.6" W x 0.6" H	0.6" W x 0.6" H	0.6" W x 0.6" H	0.6" W x 0.6" H
Mounting	3M Tape	3M Tape	3M Tape	3M Tape	3M Tape
Connector	DT04, 3.8"	DT04, 3.8"	DT04, 3.8"	DT04, 3.8"	DT04, 3.8"
LEDs	36	48	72	111	144

FEATURES

- Corner-Mounted Rigid LED Strip Lights
Or Under-Shelf Mounted
- 3M Tape Included, Not Attached
Can Be Applied to One Side or Both
- Deutsch-Style DT04 Connector
- Frosted Lens with Wide Beam Angle
- ABS Body, Polycarbonate Lens, Aluminum Base
- 5 Year Warranty

LED INTERIOR LIGHTING

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

24" LED RIGID LINEAR STRIP LIGHTS



PART NUMBER	DESCRIPTION
M84424-B	24" RIGID STRIP

Lumens	500	• Wide Beam Angle
Voltage	12.8VDC	• Frosted Lens Cover
Amp Draw	0.7A	• Polycarbonate Lens
Dimensions	25.1" L x 0.6" W x 0.9" H	• Aluminum Base
Mounting	2 Hole 24-3/4" C to C	• 5 Year Warranty
Connector	2 Leads Blunt Cut, 6"	
LEDs	71	

LED INTERIOR LIGHT WITH ADJUSTABLE HOOD



FEATURES

- 2 Hole Surface Mount Design
- Polished Adjustable Aluminum Reflector
- Low LED Amp Draw
- 5 Year Warranty

PART NUMBER	M844280-A-D	M84403-A-D	M84404-A
DESCRIPTION	20" MODEL	14" MODEL	8" MODEL
Lumens	700	500	300
Voltage	12.8VDC	12.8VDC	12.8VDC
Amp Draw	1.2A	0.7A	0.4A
Dimensions	19.8" L x 1.4" W x 0.9" H	13.9" L x 1.4" W x 0.9" H	8.0" L x 1.4" W x 0.9" H
Mounting	2 Hole Surface	2 Hole Surface	2 Hole Surface
Connector	2 Leads Deutsch, 12"	2 Leads Deutsch, 12"	2 Leads Blunt Cut, 12"
LEDs	36	24	12

19" LED INTERIOR LIGHT CHROME POLYCARBONATE HOUSING



PART NUMBER	DESCRIPTION
M844280B-CH	600 LUMENS INTERIOR LIGHT

Lumens	600	• Efficient / Affordable Interior Lighting
Voltage	12.8VDC	• Light Refraction Lens Material
Amp Draw	0.7A	• Polycarbonate Lens
Dimensions	18.9" L x 1.6" W x 0.9" H	• Chrome Polycarbonate Housing
Mounting	2 Hole Surface	• Refrigeration Safe
Connector	2 Leads Blunt Cut, 12"	• 5 Year Warranty
LEDs	54	

19" LED INTERIOR LIGHT WITH ON/OFF SWITCH



PART NUMBER	DESCRIPTION
M844282-A	550 / 250 LUMENS CARGO LIGHT


Lumens	550 HI / 250 LO	• 360-Degree Swivel Base
Voltage	12.8VDC	• 3-Position Switch HI/OFF/LO
Amp Draw	0.9A HI / 0.4A LO	• 5 Year Warranty
Dimensions	19.4" L x 2.4" W x 1.1" H	
Connector	2 Jacketed Leads Blunt Cut, 15"	
LEDs	36	

LED INTERIOR LIGHTING

NEW

MLS-C SERIES FLEXIBLE COLORED COB STRIP LIGHTS

5 YEAR WARRANTY

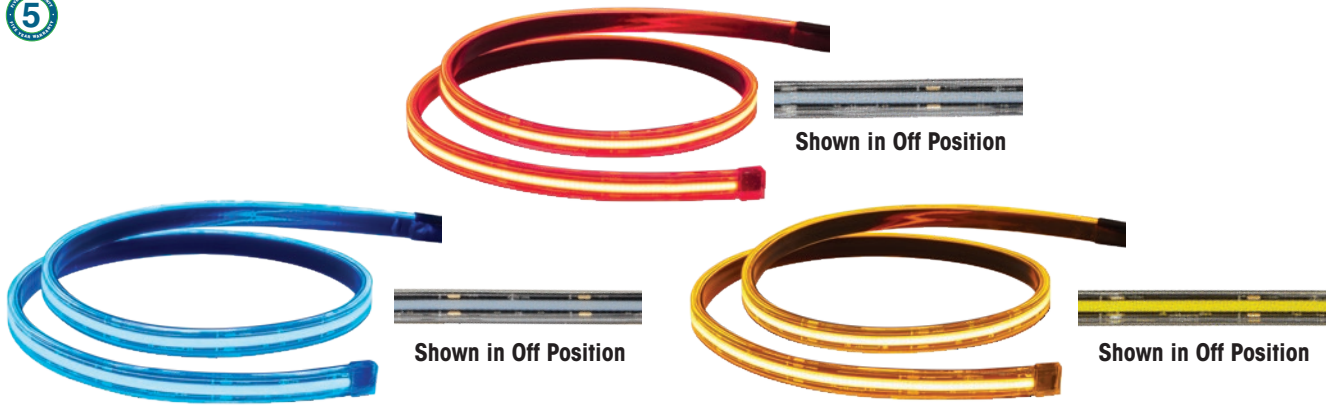

PART NUMBER	DESCRIPTION			
MLS-C36BL	COB FLEXIBLE STRIP LIGHT, 36" – BLUE			
MLS-C36R	COB FLEXIBLE STRIP LIGHT, 36" – RED			
MLS-C36Y	COB FLEXIBLE STRIP LIGHT, 36" – AMBER			
SPECIFICATION	36"BLUE	36" RED	36" AMBER	FEATURES
Voltage	12.8VDC	12.8VDC	12.8VDC	<ul style="list-style-type: none"> • COB Lighting Provides Even, Uniform Light • Bright, Rich Colors • No Hot Spots – Diffused Lighting • Flexible, Bendable Circuit Board • Durable PU Polyurethane Jacketing • 3M Adhesive Tape Mount • 5 Year Warranty Interior / 2 Year if Exterior
Amp Draw	1.3A	1.3A	1.2A	
Dimensions	LENGTH x 0.5" W x 0.2" D			
Mounting	3M Adhesive Tape			
Connector	2 Jacketed Leads, Blunt Cut 8"			
LEDs	432	432	540	

NEW

MLS-C SERIES FLEXIBLE WHITE COB STRIP LIGHTS

5 YEAR WARRANTY



PART NUMBER	DESCRIPTION				
MLS-C18	COB FLEXIBLE STRIP LIGHT, 18" – 280 LUMENS				
MLS-C24	COB FLEXIBLE STRIP LIGHT, 24" – 375 LUMENS				
MLS-C36	COB FLEXIBLE STRIP LIGHT, 36" – 560 LUMENS				
MLS-C45	COB FLEXIBLE STRIP LIGHT, 45" – 700 LUMENS				
SPECIFICATION	18"	24"	36"	45"	FEATURES
Lumens	280	375	560	700	<ul style="list-style-type: none"> • COB Lighting Provides Even, Uniform Light • Bright, Clean White Light • No Hot Spots – Diffused Lighting • Flexible, Bendable Circuit Board • Durable PU Polyurethane Jacketing • 3M Adhesive Tape Mount • 5 Year Warranty Interior / 2 Year if Exterior
Voltage	12.8VDC	12.8VDC	12.8VDC	12.8VDC	
Amp Draw	0.7A	0.9A	1.4A	1.6A	
Dimensions	LENGTH x 0.5" W x 0.2" D				
Mounting	3M Adhesive Tape				
Connector	2 Jacketed Leads, Blunt Cut 8"				
LEDs	216	288	432	432	

LED INTERIOR LIGHTING

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY


STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

NEW

MSLS-SERIES FLEXIBLE SILICONE LED STRIP LIGHTS

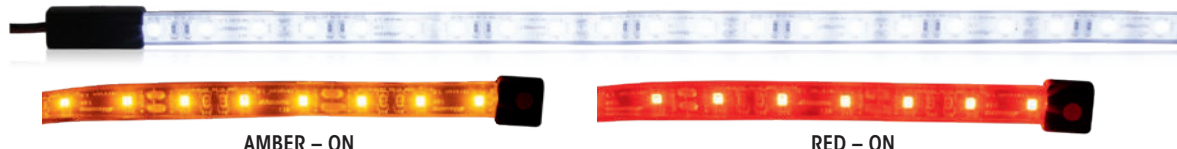

AMBER – ON

RED – ON

SPECIFICATIONS		FEATURES	
Voltage	12.8VDC	• Soft Super Flexible Silicone Jacket	• Available in a Variety of Lengths
Dimensions	Length (as shown) x 0.4" W x 0.16" H	• White Strip Lights Feature a White PCB Board	• Easy to install 3M adhesive tape mount
Mounting	3M Adhesive Tape	• Red, Blue, Amber Colored Strips Feature a Black PCB Board	• 5 Year Warranty
		• Also Available in Bulk Pack (-X)	— 2 Year Warranty if Applied to Exterior Surfaces


PART NUMBER	COLOR	DESCRIPTION	LENGTH	LEDs	LUMENS	AMP DRAW	CONNECTOR
MSLS-1218	White	Silicone Strip Light	12"	18	270	0.4A	2 Leads Blunt Cut, 5.5"
MSLS-1827	White	Silicone Strip Light	18"	27	410	0.5A	2 Leads Blunt Cut, 5.5"
MSLS-1827-DT04	White	Silicone Strip Light	18"	27	410	0.5A	2 Leads Deutsch-style, 5.5"
MSLS-2436	White	Silicone Strip Light	24"	36	550	0.7A	2 Leads Blunt Cut, 5.5"
MSLS-2436-DT04	White	Silicone Strip Light	24"	36	550	0.7A	2 Leads Deutsch-style, 5.5"
MSLS-3654	White	Silicone Strip Light	36"	54	825	1.0A	2 Leads Blunt Cut, 5.5"
MSLS-3654-DT04	White	Silicone Strip Light	36"	54	825	1.0A	2 Leads Deutsch-style, 5.5"
MSLS-4569	White	Silicone Strip Light	45"	69	1,050	1.3A	2 Leads Blunt Cut, 5.5"
MSLS-78120	White	Silicone Strip Light	78"	120	1,830	2.3A	2 Leads Blunt Cut, 5.5"
MSLS-2436R	Red	Silicone Strip Light	24"	36	N/A	0.5A	2 Leads Blunt Cut, 5.5"
MSLS-96147R	Red	Silicone Strip Light	96"	147	N/A	1.8A	2 Leads, .180 Bullets, 54"
MSLS-196300R	Red	Silicone Strip Light	196"	300	N/A	3.1A	2 Leads, .180 Bullets, 54"
MSLS-196300Y	Amber	Silicone Strip Light	196"	300	N/A	3.1A	2 Leads, .180 Bullets, 54"

NEW

SWITCHED MLS-SERIES FLEXIBLE PVC-JACKETED LED STRIP LIGHTING



Illuminated Switch
Blue in standby, red when on

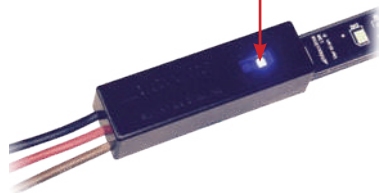

PART NUMBER	DESCRIPTION
MLS-1827-A-SW	18" WITH ON/OFF SWITCH
MLS-2436-A-SW	24" WITH ON/OFF SWITCH
MLS-4569-A-SW	45" WITH ON/OFF SWITCH

Voltage	12.8VDC	• Third Wire for Optional Door Control
Amp Draw	18" 0.4A/24" 0.6A/45" 1.1A	• Cool White For Best Illumination
Dimensions*	Length (as shown) x 0.5" W x 0.2" D	• Available in 18", 24" and 45" Lengths
Mounting	3M Adhesive Tape	• 5 Year Warranty
Connector	3 Leads Blunt Cut, 7"	— 2 Year Warranty if Applied to Exterior Surfaces

* Length does not include switch

MLS-SERIES DOUBLE ROW LED STRIP LIGHTING — BULK PACK ONLY



PART NUMBER	DESCRIPTION
MLS-D24144-X	WHITE DOUBLE ROW LED ADHESIVE STRIP LIGHT 24


Lumens	600	• Space Saving Low Profile Design
Voltage	12.8VDC	• Easy to Install 3M Adhesive Tape
Amp Draw	1.0A	• Bulk Pack Only
Dimensions	24" L x 0.6" W x 0.2" D	• 5 Year Warranty
Mounting	3M Adhesive Tap	— 2 Year Warranty if Applied to Exterior Surfaces
Connector	2 Leads Blunt Cut, 8"	
LEDs	144	

LED INTERIOR LIGHTING

NEW

MLS-SERIES FLEXIBLE PVC JACKETED LED STRIP LIGHTS

NOW AVAILABLE IN ADDITIONAL LENGTHS

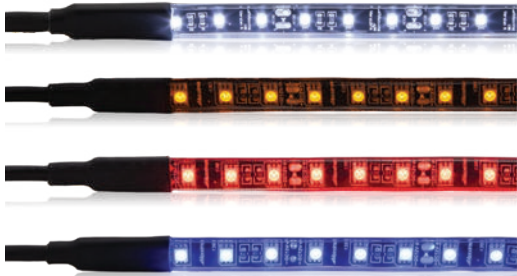

M50130
MOUNTING KIT
INCLUDED



MLS-196300R-MC

MLS-Series Flexible PVC-Jacketed LED Adhesive Strip Lights offer excellent illumination for tool box compartments, cargo and work spaces, auxiliary warning, and much more. With easy to install 3M adhesive tape, Maxxima MLS-Series Strips can be applied to any clean surface. The PVC Jacketing offers the best protection for the most severe-duty applications. MLS-Series are available in a variety of lengths and five colors.

SPECIFICATIONS

Voltage	12.8VDC	• Available in White, Warm White, Blue, Red, and Amber	• PVC Outer Jacket
Dimensions	Length (as shown) x 0.5" W x 0.2" D	• Available in a variety of sizes as shown below from 18" to 196" lengths	• Wire Strain Relief
Mounting	3M Adhesive Tape	• Red, Blue and Amber available in 18", 24" and 36"	• Easy to Install 3M Adhesive Tape
		• Mounting Kit Included	• Completely Sealed Moisture Proof Electronics
		• Retail Packaging	• 5 Year Warranty
		• Also Available in Bulk Pack (-X)	— 2 Year Warranty if Applied to Exterior Surfaces

PART NUMBER	COLOR	DESCRIPTION	LENGTH	LEDs	LUMENS	AMP DRAW	CONNECTOR
MLS-1015-AD	White	LED Adhesive Strip Light	10"	15	260	0.35A	2 Leads with Deutsch-Style, 10"
MLS-1827-A	White	LED Adhesive Strip Light	18"	27	300	0.5A	2 Leads Blunt Cut, 9.5"
MLS-1827WW-A	Warm White	LED Adhesive Strip Light	18"	27	369	0.5A	2 Leads Blunt Cut, 9.5"
MLS-2436-A	White	LED Adhesive Strip Light	24"	36	408	0.7A	2 Leads Blunt Cut, 9.5"
MLS-2436WW-A	Warm White	LED Adhesive Strip Light	24"	36	492	0.7A	2 Leads Blunt Cut, 9.5"
MLS-3654-A	White	LED Adhesive Strip Light	36"	54	612	1.1A	2 Leads Blunt Cut, 9.5"
MLS-3654WW-A	Warm White	LED Adhesive Strip Light	36"	54	738	1.1A	2 Leads Blunt Cut, 9.5"
MLS-4569-A	White	LED Adhesive Strip Light	45"	69	782	1.4A	2 Leads Blunt Cut, 11"
MLS-76114W-MC	White	LED Adhesive Strip Light	76"	114	1,300	2.1A	2 Leads .180 Bullets, 54"
MLS-78120-AD	White	LED Adhesive Strip Light	78"	120	1,360	2.4A	2 Leads with Deutsch-style, 10"
MLS-92141W-MC	White	LED Adhesive Strip Light	92"	141	1,600	2.4A	2 Leads .180 Bullets, 54"
MLS-96147W-MC	White	LED Adhesive Strip Light	96"	147	1,600	2.4A	2 Leads .180 Bullets, 54"
MLS-1827BL	Blue	LED Adhesive Strip Light	18"	27	N/A	0.6A	2 Leads Blunt Cut, 9.5"
MLS-2436BL	Blue	LED Adhesive Strip Light	24"	36	N/A	0.7A	2 Leads Blunt Cut, 9.5"
MLS-3654BL	Blue	LED Adhesive Strip Light	36"	54	N/A	1.1A	2 Leads Blunt Cut, 9.5"
MLS-1827R	Red	LED Adhesive Strip Light	18"	27	N/A	0.6A	2 Leads Blunt Cut, 9.5"
MLS-2436R	Red	LED Adhesive Strip Light	24"	36	N/A	0.7A	2 Leads Blunt Cut, 9.5"
MLS-3654R	Red	LED Adhesive Strip Light	36"	54	N/A	1.1A	2 Leads Blunt Cut, 9.5"
NEW MLS-96147R-MC	Red	LED Adhesive Strip Light	96"	147	N/A	2.3A	2 Leads .180 Bullets, 54"
MLS-196300R-MC	Red	LED Adhesive Strip Light	196"	300	N/A	2.3A	2 Leads .180 Bullets, 54"
MLS-1827Y	Amber	LED Adhesive Strip Light	18"	27	N/A	0.6A	2 Leads Blunt Cut, 9.5"
MLS-2436Y	Amber	LED Adhesive Strip Light	24"	36	N/A	0.7A	2 Leads Blunt Cut, 9.5"
MLS-3654Y	Amber	LED Adhesive Strip Light	36"	54	N/A	0.7A	2 Leads Blunt Cut, 9.5"
MLS-3654WYCL	White/Amber	LED Adhesive Strip Light	36"	54	300	0.8A	3 Leads Blunt Cut, 6.5"

2" X 4" LED INTERIOR COURTESY



Optional M42206-ADHESIVE Tape

PART NUMBER	DESCRIPTION
M42206	2" X 4" SURFACE OR TAPE MOUNT
M42206-X	2" X 4" SURFACE MOUNT OR TAPE – BULK PACK
M42206-ADHESIVE	OPTIONAL MOUNTING TAPE

Lumens	165	• Screw Mount or Optional 3M Tape Mount Sold Separately
Voltage	12.8VDC	• Ultra Thin 0.4" Low Profile Design
Amp Draw	240mA	• Polycarbonate Lens & Housing
Dimensions	4.6" W x 2.4" H x 0.4" D	• Completely Sealed Electronics
Mounting	2 Hole or 3M Adhesive Tape	• 2 Caps to Cover Screws
Connector	2 Leads Blunt Cut, 6"	• 5 Year Warranty
LEDs	14	

2-1/2" ROUND LED INTERIOR COURTESY



PART NUMBER	DESCRIPTION
M11300WCL-A	2-1/2" GROMMET MOUNT
M11300WCL-AX	2-1/2" GROMMET MOUNT – BULK PACK

Lumens	90	• Fits Standard 2-1/2" Grommet
Voltage	12.8VDC	• Polycarbonate Lens & Housing
Amp Draw	80mA	• Solid State Circuit Board
Dimensions	2.5" Diam. x 0.7" Depth	• 10 Year Warranty
Mounting	Grommet	
Connector	PL-10	
LEDs	13	

1" CHROME MICRO LED INTERIOR COURTESY



PART NUMBER	DESCRIPTION
LCL-3BL	BLUE
LCL-3R	RED
LCL-3CL	WHITE

Lumens	20 (LCL-3CL White)	• Interior Use Only
Voltage	12.8VDC	• Chrome Housing
Amp Draw	20mA	• 1 Year Warranty
Dimensions	1" W x 0.9" H x 0.4" D	
Mounting	2 Hole Surface	
Connector	2 Leads Blunt Cut	
LEDs	3	

LED INTERIOR LIGHTING

3/4" LED INTERIOR COURTESY



BCL On | BCL Off



WCL



With Optional M50112 Bezel

PART NUMBER	DESCRIPTION
M09300BCL	BLUE CLEAR LENS
M09300G	GREEN
M09300WCL	WHITE
M50112	STAINLESS STEEL BEZEL
M50133	STANDARD GROMMET ONLY
M50125	WIDE CHANNEL GROMMET

Lumens	40 (White)	<ul style="list-style-type: none"> • 3/4" Mini Courtesy Light • Retail Packaging • Polycarbonate Lens/Housing • Grommet Included • Optional M50112 Stainless Bezel • Interior or Exterior Mount • 5 Year Warranty
Voltage	12.8VDC	
Amp Draw	20mA	
Dimensions	3/4" Diam.	
Mounting	Grommet – 3/4" Hole Cutout	
Connector	2 Leads .180 Bullets, 7"	
LEDs	3	

3/4" LED INTERIOR COURTESY — BULK PACK ONLY



Lightning



With Optional M50112 Bezel

PART NUMBER	DESCRIPTION
M09330WCL-X	WHITE BULLET CONNECTOR
M50112	STAINLESS STEEL BEZEL

Lumens	35	<ul style="list-style-type: none"> • 3/4" Mini Courtesy Light • Bulk Pack Only • Patented Lightning Lens Optics • US Patent Number 8,009,364 • US Patent NO.8,717,679 B2 • Polycarbonate Lens & Housing • Grommet Included • Optional M50112 Stainless Bezel • Interior or Exterior Mount • 5 Year Warranty
Voltage	12.8VDC	
Amp Draw	60mA	
Dimensions	0.75" Diam.	
Mounting	3/4" Hole	
Connector	2 Leads .180 Bullets, 7"	
LED	1	

1.60" MINI RECTANGLE LED INTERIOR COURTESY



Lightning



PART NUMBER	DESCRIPTION
M09360BCL	MINI RECTANGLE – BLUE CLEAR LENS
M09360WCL	MINI RECTANGLE – WHITE

Lumens	20 (White)	<ul style="list-style-type: none"> • 1.60" Mini Rectangular • Polycarbonate Lens / Housing • Lightning Lens Optics • US Patent Number 8,009,364 • US Patent No.8,717,679 B2 • Self Adhesive Tape Mount • Sealed Electronics • 5 Year Warranty
Voltage	12.8VDC	
Amp Draw	50mA, 20mA ANX (BCL, G, WCL)	
Dimensions	1.60" W x 0.8" H x 0.6" D	
Mounting	3M Adhesive Tape	
Connector	2 Leads .180 Bullets, 7"	
LEDs	3	

LED INTERIOR LIGHTING

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

1.25" ROUND LED INTERIOR COURTESY — 3/4" MOUNT



With Optional M50118 Bezel

PART NUMBER	DESCRIPTION
M09410WCL	WHITE
M50118	STAINLESS STEEL BEZEL
M50132	BLACK GROMMET

Lumens	20	• 1-1/4" Round Courtesy Light
Voltage	12.8VDC	• Patented Lightning Lens Optics
Amp Draw	20mA	• US Patent No. 8,009,364
Dimensions	1-1/4" Diam.	• US Patent No. 8,717,679 B2
Mounting	3/4" Hole	• Polycarbonate Lens & Housing
	Grommet 3/4" Hole or Tape Mount	• Includes Grommet & 3M Tape
Connector	2 Leads .180 Bullets, 7"	• Optional M50118 Stainless Bezel
	Connectors 7" Leads	• Interior or Exterior Mount
LEDs	6	• 5 Year Warranty

1.25" ROUND LED INTERIOR COURTESY — 1-3/8" MOUNT



BCL On | BCL Off



WCL

Optional M50118 Bezel

PART NUMBER	DESCRIPTION
M09400BCL	BLUE CLEAR LENS
M09400G	GREEN
M09400WCL	WHITE
M50118	STAINLESS STEEL BEZEL
M50132	BLACK GROMMET

Lumens	70 (White)	• 1-1/4" Round Courtesy Light
Voltage	12.8VDC	• Patented Lightning Lens Optics
Amp Draw	40mA	• US Patent No. 8,009,364
Dimensions	1-1/4" Diam.	• US Patent No. 8,717,679 B2
Mounting	Grommet – 1-3/8" Hole Cutout	• Polycarbonate Lens/Housing
Connector	2 Leads .180 Bullets, 7"	• Grommet Included
LEDs	6	• Optional M50118 Stainless Bezel
		• Interior or Exterior Mount
		• 5 Year Warranty

2.7" STAINLESS STEEL BEZEL LED INTERIOR COURTESY



PART NUMBER	DESCRIPTION
LED-300R	RED

Voltage	12.8VDC	• Interior Use Only
Amp Draw	30mA	• Stainless Steel Bezel
Dimensions	2.7" W x 1.3" H x 0.6" D	• Sealed Electronics
Mounting	2 Hole Surface	• 1 Year Warranty
Connector	2 Leads Blunt Cut	
LEDs	3	

WARNING & SAFETY



FULL-SIZE LIGHTBARS

MINI LIGHTBARS

BEACONS


TRAFFIC DIRECTORS

SURFACE MOUNT WARNING

BACK-UP ALARMS


NEW

M20560-SERIES ELITE 60" LED LIGHTBAR





M20561 Amber Bar

M20562BY Amber – Blue Bar

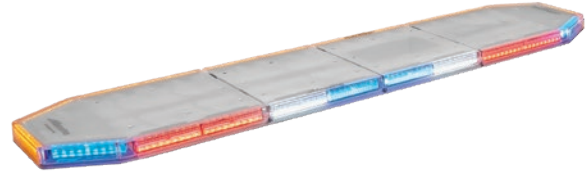

Front

Front




Rear


Rear

WITH ALLEY LIGHTS

M20563R Red Bar

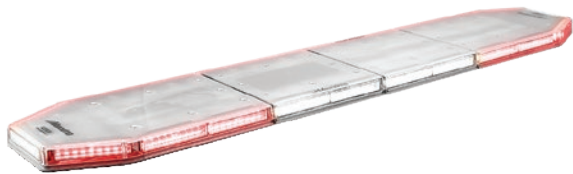

Front



Rear

SPECIFICATIONS

Voltage	12/24VDC Dual Voltage
Max Amp Draw	18A Max 12V / 9A Max 24V
Dimensions	59.4" W x 1.7" H x 11.8" D
Mounting	Flat Mount, U-Bracket Included
Connector	15 Jacketed Wires, 25' Length
LEDs	22 LED heads, 270 Total LEDs
Legal Heading	J595 Class 1, J845 Class 1A, CA13
SAE	W3-1M, W-1M, CAT13


PART NUMBER	DESCRIPTION
M20561	60" LED LIGHTBAR "ELITE", AMBER, 22 HEADS, WORK LIGHTS, ALLEYS, STT, TRAFFIC DIRECTOR
M20562BY	60" LED LIGHTBAR "ELITE", AMBER/BLUE, 22 HEADS, WORK LIGHTS, ALLEYS, STT, TRAFFIC DIRECTOR
M20563R	60" LED LIGHTBAR "ELITE", RED, 22 HEADS, WORK LIGHTS, ALLEYS, STT, TRAFFIC DIRECTOR

FEATURES

- 60" Low Profile LED Lightbar – Fully Populated, 22 Heads
- Red Stop/Turn/Tail Lights
- Rear Facing White Work Lights & Side Facing Alley Lights
- Traffic Director – Left, Right, Center Out
- 30 Programmable Flashing Warning Patterns
- Low Power (Dim) Mode and Front Cut Off
- Discrete Wiring – No Laptop Needed to Program
- 25-Foot, 15-Conductor Jacketed Cable
- Heavy Duty U-Shape Tow Bracket and Mounting Hardware Included
- Approvals: J595 Class 1, J845 Class 1A, CA Title 13
- Easily Serviceable while Mounted on Vehicle – Replacement Parts Available
- 5 Year Warranty


NEW

M20560 SELECT 60" LED LIGHTBAR

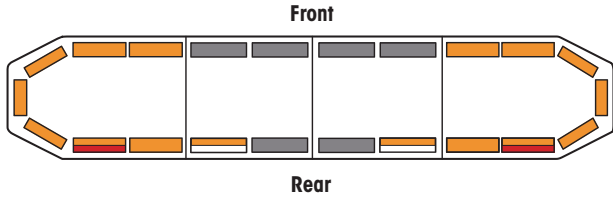

SPECIFICATIONS

Voltage	12/24VDC Dual Voltage
Max Amp Draw	14A Max 12V / 7A Max 24V
Dimensions	59.4" W x 1.7" H x 11.8" D
Mounting	Flat Mount, U-Bracket Included
Connector	15 Jacketed Wires, 25' Length
LEDs	16 LED heads, 180 Total LEDs
Legal Heading	J595 Class 1, J845 Class 1A, CA13
SAE	W3-1M, W-1M, CA113




PART NUMBER	DESCRIPTION
M20560	60" LED LIGHTBAR "SELECT", 16 AMBER HEADS WITH WORK LIGHTS, STOP/TAIL/TURN

FEATURES

- 60" Low Profile LED Lightbar – 16 Heads
- Red Stop/Turn/Tail Lights
- Rear Facing White Work Lights
- 30 Programmable Flashing Warning Patterns
- Low Power (Dim) Mode and Front Cut Off
- Discrete Wiring – No Laptop Needed to Program
- 25-Foot Cable, 15-Conductor Jacketed Cable
- Heavy Duty U-Shape Tow Bracket and Mounting Hardware Included
- Approvals: J595 Class 1, J845 Class 1A, CA Title 13
- Easily Serviceable while Mounted on Vehicle – Repair Parts Available
- 5 Year Warranty

NEW

M50970 8-BUTTON LIGHTBAR CONTROLLER



PART NUMBER	DESCRIPTION
M50970	8-BUTTON LIGHTBAR CONTROLLER M20500-SERIES

Voltage	12/24VDC Dual Voltage
Amp Draw	Max: 20A Peak / 10A Continuous
Dimensions	2.3" W x 3.9" H x 0.80" D
Mounting	Bracket Included with Screws & 3M Tape
Connector	3 Jacket Leads: Power In, Power Out, Accessory Out <ul style="list-style-type: none"> • Power In & Out, 2 Wire 16AWG, 2 ft. • Accessory Out, 7 Wire 24AWG, 5 ft.

- Compact 8-Button Controller
- Soft-Touch, Tactile Push Buttons
- Programmable, User-Assignable Switches
- Blue LED Indicator Lights
- Mounting Bracket, Screws, 3M Tape Included
- 3 Year Warranty

NEW

MRP-20500-SERIES SERVICE & REPLACEMENT PARTS



MRP-20501



MRP-20514



MRP-20502



MRP-20503



MRP-20508



MRP-20504



MRP-20505



MRP-20506



MRP-20507



MRP-20509



MRP-20510



MRP-20511



MRP-20512



MRP-20513



MRP-20515

PART NUMBER	DESCRIPTION
MRP-20501	Mounting Kit – 2 Pcs. U-Bracket & Hardware
MRP-20502	Top Dome, End Section
MRP-20503	Top Dome, Center Section
MRP-20504	CPU Motherboard
MRP-20505	Light Head, Front, Rear, or Corner All Amber
MRP-20506	Light Head, Rear Amber/White Work Light
MRP-20507	Light Head, Rear Amber/Red S/T/T

PART NUMBER	DESCRIPTION
MRP-20508	Cable Assembly, 25 foot
MRP-20509	Light Head, Front, Rear, or Corner All Blue
MRP-20510	Light Head, Front, Rear, or Corner All White
MRP-20511	Light Head, Front, Rear, Corner – Red Only
MRP-20512	Light Head, Rear – Red Flashing + Red STT
MRP-20513	Light Head, Rear – Red + White Work Light
MRP-20515	Light Head, Front, Rear, or Corner All Green

NEW

HI-RISE LIGHTBAR ACCESSORY BRACKET

PART NUMBER	DESCRIPTION
MRP-20514	3" Hi-Rise Bracket and Light Head Mount, 2 Pcs.



MRP-20514 3 Inch Hi-Rise Bracket



MRP-20501 Standard Bracket



MRP-20514 Accommodates **M20389-Series** and **M20484-Series** Warning Lights



MRP-20514 Accommodates **MWL-32** and **MWL-32WYCL** Work Lights

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

NEW

M20488 -DC-SERIES DUAL COLOR 15" X 8" MINI-LIGHTBARS



M20488BYCL-DC



M20488GYCL-DC

NEW

PART NUMBER	DESCRIPTION
M20488BYCL-DC	AMBER/BLUE CLEAR LENS – DUAL COLOR
M20488GYCL-DC	AMBER/GREEN CLEAR LENS – DUAL COLOR

Voltage	12/24VDC
Amp Draw	4.0A 12V / 2.0A 24V
Dimensions	15.4" L X 8.5" H X 2.2" H
Mounting	4 Hole Surface (See Below)
Connector	4 Jacketed Wires, Blunt Cut, 15"
LEDs	160 (80 EACH COLOR)
Legal Heading	W3-1M
SAE	J845 CLASS 1A

- SAE Class 1, CA Title 13 Compliant Warning Device
- 18 Programmable Flash Patterns with Five Memory Save Modes
- Can Flash Single Color Only, or Two-Color Patterns
- Selectable Color Patterns
- 3 Mounting Options Included
- 5 Year Warranty

M20487 / 88 -SERIES SINGLE COLOR & SPLIT COLOR 15" X 8" MINI-LIGHTBARS



M20487YCL Mag Mount



M20487YWCL Mag Mount




M20488YCL Permanent Mount




M20488YWCL Permanent Mount

M20488-SERIES PERMANENT MOUNT OPTIONS

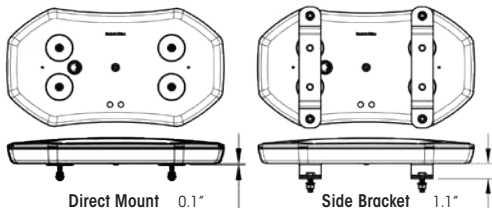

Direct Mount 0.1"

Side Bracket 1.1"



Angled Bracket 0.8"

PART NUMBER	DESCRIPTION
M20487YCL	AMBER CLEAR LENS – MAG MOUNT
M20487YWCL	AMBER / WHITE CLEAR LENS – MAG MOUNT
M20488YCL	AMBER CLEAR LENS – PERMANENT MOUNT
M20488YWCL	AMBER / WHITE CLEAR LENS – PERMANENT MOUNT

Voltage	12/24VDC
Amp Draw	4.0A 12V / 2.0A 24V
Dimensions	15.4" L x 8.5" W x 2.2" H
Mounting	
- M20487	Mag Mount
- M20488	4 Hole Surface
Connector	
- M20487	Cig. Plug, 15 ft
- M20488	3 Wire Blunt Cut, 15"
LEDs	80
Legal Heading	W3-1M
SAE	J845 Class 1A, CA 13

- 18 Selectable Flash Patterns
- SAE Class 1 & CA 13 Compliant
- Available in All-Amber with Clear Lens or Amber/White Split Color with Clear Lens
- **M20488-Series** Includes 3 Mounting Options: Direct Mount, Side Bracket, and Angled Bracket
- **M20487-Series** Include Magnets & Cig Plug
- Clear Lens with Black Top
- Polycarbonate Lens & Housing
- Low Profile Design
- Retail Packaging
- 5 Year Warranty

14" X 5.6" MINI LIGHTBAR — AMBER / SMOKED LENS



Includes Cigarette Plug with on/off and pattern select switches



PART NUMBER	DESCRIPTION
M20489YSL	AMBER SMOKED LENS MICRO BAR, MAG MOUNT

Voltage	12/24VDC
Amp Draw	4.8A 12V / 2.4A 24V
Dimensions	14.3" L x 6.7" W x 2.3" H
Mounting	Suction Mag Mount
Connector	Cigarette Plug, 15-Foot Cable
LEDs	72
Legal Heading	W3-1M
SAE	J845 CLASS 1A

- Compact Micro-Bar, SAE Class 1
- Amber LEDs / Clear Smoked Lens
- 26 Programmable Flash Patterns
- 72 LED
- High Density LEDs Provide Full Coverage with No Individual LEDs Distinguishable
- Vacuum Suction Cup / Magnet Mount
- 15-Foot Cable with Cig. Plug
- 2 Switches: On/Off and Pattern Select
- 5 Year Warranty

14" X 8" MINI LIGHTBAR — CLEAR LENS



M20486YCL



M20486YWCL



Optional Permanent Mount Feet Shown

Includes Cigarette Plug with on/off and pattern select switches



PART NUMBER	DESCRIPTION
M20486YCL	AMBER CLEAR LENS
M20486YWCL	AMBER/WHITE SPLIT COLOR – CLEAR LENS

Voltage	12/24VDC
Amp Draw	3.1A 12VDC / 1.5A 24VDC
Dimensions	14.00" L x 8.25" W x 1.75" H
Mounting	Magnetic & Surface Mounting Kits Included
Connector	15' Cable with Cigarette Plug
LEDs	M20486YCL 36 Amber M20486YWCL 18 Amber / 18 White
Legal Heading	W3-1M
SAE	J845 Class 1A

- 14" Mini Emergency Warning Bar
- Includes Magnetic Mount & Permanent Mount
- SAE Class 1 Warning Device
- Ten (10) Selectable Flash Patterns
- 5 Year Warranty

NEW

M42745Y-CA13 WARNING BEACON AMBER 6.9" — CA TITLE 13



Shown with optional M50156 Sold Separately

PART NUMBER	DESCRIPTION
M42745Y-CA 13	WARNING BEACON AMBER LED, CLASS 1, 6.9", CA TITLE 13
M50156	BRANCH GUARD FOR M42745Y-CA13

Voltage	12/24VDC	• SAE Class 1 LED Warning Beacon
Amp Draw	4.0A 12V / 2.0A 24V	• California CCR Title 13 Compliant (CA 13)
Dimensions	6.9" Diam x 4.1" H	• 32 Programmable Flash Patterns
Mounting	3 Hole Surface	• 3 Memory Slots, or Modes, Available
Connector	6 Wires, Jacketed, 12"	• Can Sync Multiple Beacons
LEDs	36 (24 Side, 12 Top)	• Programmable Dim Mode Available
Legal Heading	W3-1M, CA T13	• 12 LEDs on Top Can be Toggled ON or OFF
SAE	J845 Class 1A, CA13	• 3 Possible Bolt Circles
		• Polycarbonate Dome & Cast Alum. Base
		• 5 Year Warranty

NEW

M42730Y-CA13 LED WARNING BEACON — CA TITLE 13



Under-Mount 5.1" Bolt Circle. Integrated M5 Nutserts

PART NUMBER	DESCRIPTION
M42730Y-CA13	WARNING BEACON AMBER LED, CLASS 1, CA TITLE 13

Voltage	12/24VDC	• SAE Class 1 LED Warning Beacon
Amp Draw	3.4A 12V / 1.7A 24V	• California CCR Title 13 Compliant (CA 13)
Dimensions	6.5" Diam. x 5.4" H	• 21 Programmable Flash Patterns
Mounting	3 Hole Surface, 5.9" Bolt Circle	• Can Sync Multiple Beacons
Connector	3 Wire Blunt Cut, 22"	• 2 Possible Bolt Circles:
LEDs	64	– Exterior: 3 Hole 5.9" Bolt Circle
Legal Heading	W3-1M	– Interior: 3 Hole 5.1" Bolt Circle
SAE	J845 Class 1A, CA 13	• Black Out Disc on Top of Dome
		• Polycarbonate Dome & Base
		• Retail Packaging
		• 5 Year Warranty

NEW

M42710Y-A LOW PROFILE 3" CLASS 1 LED AMBER FLASHING WARNING BEACON



PART NUMBER	DESCRIPTION
M42710Y-A	WARNING BEACON AMBER LED, COMPACT, CLASS1

Voltage	12 - 80 VDC	• Compact Size – Only 2.6" Tall
Amp Draw	1.2A / 12V 0.6A / 24V	• SAE Class 1 Amber LED Beacon
Dimensions	2.9" Diam. x 2.6" H 3.9"W at Mounting Feet	• 14 Selectable Flash Patterns
Mounting	2 Hole Surface 3-3/8" C to C	• 12 - 80 VDC Multi-Voltage
Connector	3 Jacketed Leads Blunt Cut, 10"	• Permanent Mount
LEDs	16	• Polycarbonate Lens, Cast Aluminum & PC Housing
Legal Heading	W3-1M	• 5 Year Warranty
SAE	J845 Class 1A	

M42740Y FULL SIZE 6" CLASS 1 LED WARNING BEACON — MEDIUM DOME



Built In Pipe Mount

PART NUMBER	DESCRIPTION
M42740Y	WARNING BEACON AMBER LED, CLASS 1, 4.6" HEIGHT

Voltage	12 - 48 VDC Multi-Voltage	• SAE Class 1 LED Warning Beacon
Amp Draw	1.5A 12V / 0.8A 24V	• 12 Programmable Flash Patterns
Dimensions	6.4" Diam. x 4.6" H	• 12 - 48 VDC Multi-Voltage
Mounting	3 Hole Surface, 6" Bolt Circle	• Industry Standard 3-Bolt Pattern
Connector	3 Wire Blunt Cut, 12"	• Includes 1-1/4" Pipe Mount in Base
LEDs	48	• Polycarbonate Dome & Aluminum Base
Legal Heading	W3-1M	• Retail Packaging
SAE	J845 Class 1A	• 5 Year Warranty

M42741Y FULL SIZE 6" CLASS 1 LED WARNING BEACON — TALL DOME



PART NUMBER	DESCRIPTION
M42741Y	WARNING BEACON AMBER LED, CLASS 1, 6.1" HEIGHT

Voltage	12 - 48 VDC Multi-Voltage	• SAE Class 1 LED Warning Beacon
Amp Draw	1.8A 12V / 1A 24V	• 12 Programmable Flash Patterns
Dimensions	6.4" Diam. x 6.1" H	• 12 - 48 VDC Multi-Voltage
Mounting	3 Hole Surface, 6" Bolt Circle	• Industry Standard 3-Bolt Pattern
Connector	3 Wire Blunt Cut, 12"	• Includes 1-1/4" Pipe Mount in Base
LEDs	60	• Polycarbonate Dome & Aluminum Base
Legal Heading	W3-1M	• Retail Packaging
SAE	J845 Class 1A	• 5 Year Warranty



M42725Y WARNING BEACON AMBER LED 6"



PART NUMBER	DESCRIPTION
M42725Y	WARNING BEACON AMBER LED, CLASS 1

Voltage	12/24VDC	• SAE Class 1 Amber LED Beacon
Amp Draw	1.6A 12V / 0.8A 24V	• 12 Programmable Flash Patterns
Dimensions	6.7" Diam x 5.5" H	• Mounting Screws Included
Mounting	3 Hole Surface, 6.0" Bolt Circle	• 12/24VDC Dual Voltage
Connector	3 Jacketed Wires, Blunt Cut, 12"	• Polycarbonate Dome & Base
LEDs	48	• 5 Year Warranty
Legal Heading	W3-1M	
SAE	J845 Class 1A	

M42720Y LOW PROFILE 5" CLASS 1 LED AMBER FLASHING WARNING BEACON



PART NUMBER	DESCRIPTION
M42720Y	WARNING BEACON AMBER LED 5"

Voltage	12 - 80 VDC	• SAE Class 1 Amber LED Beacon
Amp Draw	1.5A 12V / 0.6A 24V	• Industry Standard 3 Hole Mount
Dimensions	5.1" Diam. x 3.8"H	• Quad Flash Only – Simple 2 Wire Installation
Mounting	3 Hole Flange, 4-1/2" Bolt Circle	
Connector	2 Leads Blunt Cut, 7"	• 12 - 80 VDC Multi-Voltage
LEDs	12	• Permanent Mount
Legal Heading	W3-1M	• Polycarbonate Lens, Nylon Base
SAE	J845 Class 1A	• 5 Year Warranty

NEW

M42718Y LED WARNING BEACON — SAE CLASS 2



PART NUMBER	DESCRIPTION
M42718Y	WARNING BEACON AMBER LED, CLASS 2

Voltage	12-80 VDC Multi-Voltage	• SAE Class 2 LED Warning Beacon
Amp Draw	0.7A 12V / 0.4A 24V	• 12 Programmable Flash Patterns
Dimensions	5.1" Diam. x 3.6"H	• 12-80 VDC Multi-Voltage
Mounting	3 Hole Surface, 4.7" Bolt Circle	• Industry Standard Bolt Circle
Connector	3 Wire Blunt Cut, 13"	• Polycarbonate Dome & ABS Base
LEDs	16	• Retail Packaging
Legal Heading	W3-2M	• 5 Year Warranty
SAE	J845 Class 2A	

M42705Y 5" CLASS 2 LED AMBER FLASHING WARNING BEACON



PART NUMBER	DESCRIPTION
M42705Y	AMBER

Voltage	12 - 80 VDC	• Surface Mount
Amp Draw	200mA	• Quad Flash Only
Dimensions	2.9" Diam. x 4.8"H	• 12 - 80 VDC Multi-Voltage
Mounting	2 Hole Flange	• Permanent Mount
Connector	2 Leads Blunt Cut, 12-1/2"	• Polycarbonate Lens & Housing
LEDs	3	• 5 Year Warranty
Legal Heading	W3-2M	
SAE	J845 Class 2A	

36" AND 48" LED TRAFFIC DIRECTORS



M20400Y - 36" Traffic Director



M20401Y - 48" Traffic Director



Includes 2 three-position switches



Includes 2 sets of mounting brackets: L-Bracket and Surface Mount



Optional M50920 Sold Separately

PART NUMBER	DESCRIPTION	PART NUMBER
	M20400Y 36" TRAFFIC DIRECTOR	M20401Y 48" TRAFFIC DIRECTOR
Voltage	12.8VDC	12.8VDC
Amp Draw	4.0A Max all lamps lit	6.0A Max all lamps lit
Dimensions	36" W x 1.3" H x 1.2" D	48.4" W x 1.3" H x 1.2" D
Mounting	L-Brackets or Surface Mount Brackets	L-Brackets or Surface Mount Brackets
Connector	6-Wire Cable, Blunt Cut, 30 ft	6-Wire Cable, Blunt Cut, 30 ft
LEDs	24	33
Legal Heading	W-1M	W-1M
SAE	J595 Class 1/CA Title 13	J595 Class 1/CA Title 13
		PART NUMBER
		M50920 OPTIONAL CONTROL HEAD SOLD SEPARATELY


FEATURES

- SAE J595 Class 1/CA Title 13
- 12 patterns to choose from for Traffic Director Mode and 12 patterns to choose from for Warning Mode
- Includes 2 three-position rocker switches to select Traffic Director Arrow Direction, and Warning Mode Operation
- Includes 2 sets of mounting brackets: L-Bracket Mount and Surface Mount
- Polycarbonate Lens and aluminum housing
- Use switches included or purchase Optional M50920 Control Module sold separately
- Includes 30 Foot Cable
- 5 Year Warranty

DUAL FUNCTION SCENE LIGHT/WARNING LIGHT



2 Lights in one. This Dual Color and Dual Function Light operates as a white scene light and also as a flashing amber/white warning light. Rugged exterior grade.

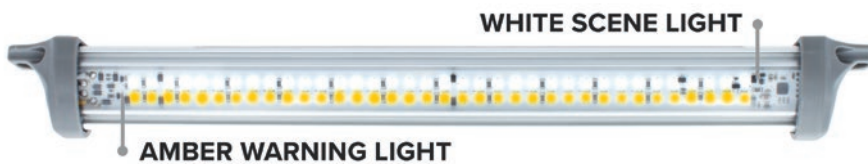


PART NUMBER	DESCRIPTION
M84420YWCL-DC	13" SCENE LIGHT / WARN LIGHT
Voltage	12.8VDC
Amp Draw	0.9A
Dimensions	13" W x 1.4" H x 1.4" D
Mounting	2 Hole 12-9/16" Center to Center
Connector	4 Leads .180 Bullets, 17"
LEDs	72 (36 Amber, 36 White)
Legal Heading	W-1M
SAE	J595 Class 1
	<ul style="list-style-type: none"> • 700 Lumens White LED Scene Light/Undercarriage Light • SAE Class 1 Amber LED Flashing Warning Light • 28 Selectable Flash Patterns • Aluminum Housing with Rugged Nylon End Caps • Polycarbonate Lens • Exterior Mount/Sealed IP68 Rated • 3 Year Warranty

LOW-PROFILE LED SURFACE MOUNT WARNING — TRI COLOR MODELS — 18 LEDs



Available in 5 Different Models / Color Combinations



With Black Bezel (Included)

PART NUMBER	DESCRIPTION
M20494YGW-TC	AMBER/GREEN/WHITE TRI COLOR
M20494RGY-TC	RED/GREEN/AMBER TRI COLOR
M20494RYW-TC	RED/AMBER/WHITE TRI COLOR
M20494RWB-TC	RED/WHITE/BLUE TRI COLOR
M20494BYW-TC	BLUE/AMBER/WHITE TRI COLOR

Voltage	12/24VDC	<ul style="list-style-type: none"> • Available in 5 Models / Color Combinations • Each Model Includes 3 Colors in One Light • Each Color Fills The Whole Light • 28 Selectable Flash Patterns • 7 Selectable Flash Color Options • Up to 11 Programmable "Modes" • Programmable Dim Feature Available • Synchronized & Alternating Patterns • Class 1 & CA Title 13 • Polycarbonate Lens & Aluminum Housing • Low Profile Design • 5 Year Warranty
Amp Draw	0.8A 12VDC / 0.4A 24VDC	
Dimensions		
- Light only	5.6" W x 1.6" H x 0.5" D	
- With Bezel	5.9" W x 1.6" H x 0.5" D	
Mounting	2 Hole Surface, 4.7" C to C	
Connector	5 Leads Blunt Cut, 7"	
LEDs	18	
Legal Heading	W-1M	
SAE	J595 Class 1 CA13	

LOW-PROFILE LED SURFACE MOUNT WARNING — QUAD COLOR MODELS — 24 LEDs



Available in 2 Different Models / Color Combinations



With Black Bezel (Included)

PART NUMBER	DESCRIPTION
M20494RBYW-QC	RED/BLUE/AMBER/WHITE QUAD COLOR
M20494RGYW-QC	RED/GREEN/AMBER/WHITE QUAD COLOR

Voltage	12/24VDC	<ul style="list-style-type: none"> • Available in 5 Models / Color Combinations • Each Model Includes 4 Colors in One Light • Each Color Fills The Whole Light • 28 Selectable Flash Patterns • 15 Selectable Flash Color Options • Up to 11 Programmable "Modes" • Programmable Dim Feature Available • Synchronized & Alternating Patterns • Class 1 & CA Title 13 • Polycarbonate Lens & Aluminum Housing • Low Profile Design • 5 Year Warranty
Amp Draw	0.8A 12VDC / 0.4A 24VDC	
Dimensions		
- Light only	5.6" W x 1.6" H x 0.5" D	
- With Bezel	5.9" W x 1.6" H x 0.5" D	
Mounting	2 Hole Surface, 4.7" C to C	
Connector	5 Leads Blunt Cut, 7"	
LEDs	24	
Legal Heading	W-1M	
SAE	J595 Class 1 CA13	

180-DEGREE SURFACE MOUNT WARNING — AMBER CLEAR LENS



PART NUMBER	DESCRIPTION
M20495YCL	180-DEGREE WARNING LIGHT

Voltage	12/24VDC	<ul style="list-style-type: none"> • 21 Selectable Flash Patterns • SAE J845 Compliant 180-Degrees • Surface Mount or Bracket Mount • Optional Swivel Bracket Included • Polycarbonate Lens & Aluminum Housing • Sealed Electronics • 5 Year Warranty
Amp Draw	1.0A 12VDC / 0.5A 24VDC	
Dimensions		
- Light only	3.5" W x 1.4" H x 1.4" D	
- With Bracket	4.3" W x 2.4" H x 3.2" D	
Mounting	2 Hole Surface, 3.1" C to C	
Connector	4 Leads Blunt Cut, 15"	
LEDs	12	
Legal Heading	W-1M, WS3-1 (180°)	
SAE	J845 Class 1S, J595 Class 1	

5.6" LOW-PROFILE LED SURFACE MOUNT WARNING — DUAL COLOR, SINGLE, OR SPLIT



With Black Bezel

SINGLE COLOR AND SPLIT COLOR MODELS — 6 LEDs

PART NUMBER	DESCRIPTION
M20389YCL	AMBER 6 LEDs
M20389YWCL	AMBER/WHITE 6 LEDs



M20389YCL



M20389YWCL

Voltage	12/24VDC	• 28 Selectable Flash Patterns
Amp Draw	0.8A 12VDC / 0.4A 24VDC	• Synchronized & Alternating Patterns
Dimensions		• Class 1 & CA Title 13
- Light only	5.6" W x 1.6" H x 0.5" D	• Black Bezel Included
- With Bezel	5.9" W x 1.6" H x 0.5" D	• Polycarbonate Lens & Aluminum Housing
Mounting	2 Hole Surface, 4.7" C to C	• Low Profile Design
Connector	4 Leads Blunt Cut, 7"	• Sealed Electronics
LEDs	6	• 5 Year Warranty
Legal Heading	W-1M	
SAE	J595 Class 1 CA13	

DUAL COLOR MODELS — 12 LEDs

PART NUMBER	DESCRIPTION
M20389YWCL-DC	AMBER/WHITE 12 LEDs
M20389RWCL-DC	RED/WHITE 12 LEDs
M20389GYCL-DC	GREEN/AMBER 12 LEDs
M20389GWCL-DC	GREEN/WHITE 12 LEDs
M20389BYCL-DC	BLUE/AMBER 12 LEDs
M20389BRCL-DC	BLUE/RED 12 LEDs

Voltage	12/24VDC	• 28 Selectable Flash Patterns
Amp Draw	0.8A 12VDC / 0.4A 24VDC	• Synchronized & Alternating Patterns
Dimensions		• Class 1 & CA Title 13
- Light only	5.6" W x 1.6" H x 0.5" D	• Black Bezel Included
- With Bezel	5.9" W x 1.6" H x 0.5" D	• Polycarbonate Lens & Aluminum Housing
Mounting	2 Hole Surface, 4.7" C to C	• Low Profile Design
Connector	4 Leads Blunt Cut, 7"	• Sealed Electronics
LEDs	12	• 5 Year Warranty
Legal Heading	W-1M	
SAE	J595 Class 1 CA13	



M20389YWCL-DC



M20389RWCL-DC



M20389GYCL-DC



M20389GWCL-DC



M20389BYCL-DC



M20389BRCL-DC

MOUNTING ACCESSORIES — ALL M20389-SERIES, M20494-SERIES

PART NUMBER	DESCRIPTION
M50147	CHROME BEZEL
M50121-A	STAINLESS STEEL BRACKET



Optional M50147 Chrome Bezel



Shown with M50121-A sold separately

3.6" LOW-PROFILE 4 LED AND 8 LED SURFACE MOUNT EMERGENCY WARNING



With Black Bezel

SINGLE COLOR MODELS — 4 LEDs

PART NUMBER	DESCRIPTION
M20484YCL	AMBER
M20484WCL	WHITE
M20484RCL	RED
M20484BCL	BLUE



SPLIT COLOR MODELS — 4 LEDs

PART NUMBER	DESCRIPTION
M20484YWCL	AMBER/WHITE SPLIT COLOR
M20484RWCL	RED/WHITE SPLIT COLOR
M20484BRCL	BLUE/RED SPLIT COLOR
M20484GYCL	GREEN/AMBER SPLIT COLOR



DUAL COLOR MODELS — 8 LEDs

PART NUMBER	DESCRIPTION
M20484RYCL-DC	RED/AMBER DUAL COLOR
M20484YWCL-DC	AMBER/WHITE DUAL COLOR
M20484RWCL-DC	RED/WHITE DUAL COLOR
M20484GYCL-DC	GREEN/AMBER DUAL COLOR
M20484GWCL-DC	GREEN/WHITE DUAL COLOR
M20484BYCL-DC	BLUE/AMBER DUAL COLOR



MOUNTING ACCESSORIES — ALL M20484-SERIES

PART NUMBER	DESCRIPTION
M50149	CHROME BEZEL
M50115	STAINLESS STEEL BRACKET



Optional M50149
Chrome Bezel



M50115
Stainless Steel Bracket

Voltage	12.8VDC	<ul style="list-style-type: none"> • 28 Selectable Flash Patterns • Synchronized & Alternating Patterns • 2 Modes allows secondary flash or steady on function (Dual Color Models) • Class 1 & CA Title 13 • Black Bezel Included • Polycarbonate Lens & Aluminum Housing • Low Profile Design • 5 Year Warranty
Amp Draw	0.8A	
Dimensions		
- Light only	3.6" W x 1.4" H x 0.5" D	
- With Bezel	3.8" W x 1.6" H x 0.5" D	
Mounting	2 Hole Surface, 3.3" C to C	
Connector	4 Leads Blunt Cut, 7"	
LEDs	4 (Single, Split Color) 8 (Dual Color)	
Legal Heading	W-1M (Single Color, Dual Color) W-2M (Split Color)	
SAE	J595 Class 1 CA13 (Single, Dual Color) J595 Class 2 (Split Color)	

3 LEDS SURFACE MOUNT EMERGENCY WARNING



M50115
Stainless Steel Bracket



M50141/M50142
Black Vinyl Grommets



M50137
Chrome Bezel

PART NUMBER	DESCRIPTION
M20383YCL	AMBER CLEAR LENS
M20383YCL-X	AMBER CLEAR LENS – BULK PACK
M20383WCL	WHITE CLEAR LENS
M20383RCL	RED CLEAR LENS
M50141	BLACK GROMMET
M50142	WIDE CHANNEL BLACK GROMMET
M50137	CHROME BEZEL
M50115	STAINLESS STEEL BRACKET

- Voltage** 12.8VDC
- Amp Draw** 200mA
- Dimensions**
 - **Light only** 3.5" W x 1.5" H x 0.9" D
 - **With Bezel** 3.8" W x 1.7" H x 1.0" D
- Mounting** Surface or Grommet
- Connector** 4 Leads Blunt Cut, 7"
- LEDs** 3
- Legal Heading** W-1M
- SAE** J595 Class 1 CA13
- 17 Selectable Flash Patterns
- Class 1 & CA Title 13 Compliant
- Synchronized/Alternating Flash
- Polycarbonate Lens & Aluminum Housing
- Snap-On Black Bezel Included
- Optional Chrome Bezel
- Optional Stainless Steel Bracket
- Optional Grommet
- 5 Year Warranty

4 LEDS SURFACE MOUNT EMERGENCY WARNING — SINGLE AND SPLIT COLOR



M50143
Black Vinyl Grommet



M50138
Chrome Bezel



M50116
Stainless Steel Bracket

PART NUMBER	DESCRIPTION
M20384YCL	AMBER CLEAR LENS
M20384YCL-X	AMBER CLEAR LENS – BULK PACK
M20384WYCL	WHITE/AMBER CLEAR LENS
M20384WCL	WHITE CLEAR LENS
M20384GYCL	GREEN/AMBER CLEAR LENS
M20384RCL	RED CLEAR LENS
M20384RWCL	RED/WHITE CLEAR LENS
M20384BRCL	BLUE/RED CLEAR LENS
M20384BWCL	BLUE/WHITE CLEAR LENS
M50143	BLACK GROMMET
M50138	CHROME BEZEL
M50116	STAINLESS STEEL BRACKET

- Voltage** 12.8VDC
- Amp Draw** 0.7A
- Dimensions**
 - **Light only** 4.4" W x 1.5" H x 0.9" D
 - **With Bezel** 4.6" W x 1.7" H x 1.0" D
- Mounting** Surface or Grommet
- Connector** 4 Leads Blunt Cut, 7"
- LEDs** 4
- Legal Heading** W-1M RCL, WCL, YCL
- SAE** J595 Class 1 CA13 (Single Color)
- 22 Selectable Flash Patterns
- Class 1 & CA Title 13 Compliant
- Synchronized/Alternating Flash
- Polycarbonate Lens & Aluminum Housing
- Snap-On Black Bezel Included
- Optional Chrome Bezel
- Optional Stainless Steel Bracket
- Optional Black Vinyl Grommet
- 5 Year Warranty

1" X 3" ULTRA THIN CLASS 2 EMERGENCY WARNING LIGHTS SURFACE/TAPE MOUNT



PART NUMBER	DESCRIPTION
M20388YCL	AMBER CLEAR LENS

Voltage	12/24VDC	• Quad/Steady On Only
Amp Draw	400mA 12V / 240mA 24V	• Steady On Mode Allows Flasher Module Control (M50910)
Dimensions	3.3" L x 1.2" H x 0.5" D	• 12/24VDC Dual Voltage
Mounting	3M Adhesive Tape	• Polycarbonate Lens & Housing
Connector	3 Leads Blunt Cut, 7"	• Sync/Pattern Change
LEDs	6	• Integrated Wire Lead
Legal Heading	W-2M	• 5 Year Warranty
SAE	J595 Class 2	

NEW

6" OVAL WARNING — GROMMET MOUNT



SINGLE COLOR MODELS




PART NUMBER	DESCRIPTION
M63201BCL	BLUE CLEAR LENS
M63201R	RED
M63201Y	AMBER
M63201Y-X	AMBER — BULK PACK
M63201YCL	AMBER CLEAR LENS
M63201Y-A	AMBER WARNING & PARK/TURN
M63201WCL-A	WHITE WARNING & BACK-UP
M63201YWCL	AMBER / WHITE CLEAR LENS — SPLIT COLOR
M63201GYCL	AMBER / GREEN CLEAR LENS — SPLIT COLOR
M63201BYCL	AMBER / BLUE CLEAR LENS — SPLIT COLOR
M63201BRCL	RED / BLUE CLEAR LENS — SPLIT COLOR

SPLIT COLOR MODELS



M63201YWCL



M63201GYCL



M63201BYCL



M63201BRCL

- NEW**
- NEW**
- NEW**
- NEW**

Voltage	12/24VDC
Amp Draw	R, Y, Y-A: Max 0.9A 12V; BCL, WCL-A: Max 0.6A 12V
Dimensions	6.3" W x 2.2" H x 1.2" D
Mounting	6" Oval Grommet
Connector	Integrated PL-3 + 1 Wires, 11"
LEDs	24
Legal Heading	W-1M (Y, R, Y/W, G/Y, B/Y) W-2M (B, B/R, W)
SAE	R, W-2M (White), P 16 I7, W-1M (Amber)
- Split Colors	Max 0.9A 12V
- WCL-A, Y-A	Integrated PL-3 + 2 Wires, 11"
- Split Colors	Integrated PL-3 + 2 Wires, 11"
- R, Y, YW, GY, BY	J595 Class 1
- B, BR, W	J595 Class 2
- WCL-A	J593, J595 Class 2
- Y-A	J222, J2261, J595 Class 1

- M63201-SERIES**
- 12/24VDC Dual Voltage
 - 7 Selectable Flash Patterns / 1 Steady
 - 28 Selectable Flash Patterns (SPLIT COLOR)
 - Alternate/Sync Provisions
 - SAE Class 1 Patterns Red/Amber
 - SAE Class 2 Patterns White/Blue
 - Fits Standard 6" Grommet (M50600-B Sold Separately)
 - 5 Year Warranty
- M63201WCL-A, M63201Y-A Additional Features**
- 28 Programmable Flash Patterns
 - Optional DOT Compliant Back-Up (WCL-A), or Amber Park / Front Turn / Rear Turn (Y-A)
 - 4 (WCL-A) or 5 (-A) Programmable Priority Modes Allows Back-Up/Turn Signal Override, or Warning Override
 - Discrete Wiring – Dedicated Back-Up/Turn and Warning Circuits

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

6" OVAL THIN PROFILE SURFACE MOUNT WARNING



PART NUMBER	DESCRIPTION
M63353Y	AMBER
M63353YCL	AMBER CLEAR
M63353WYCL	WHITE/AMBER CLEAR LENS
M63353R	RED
M63353YGCL-A	AMBER GREEN CLEAR
M50146	STAINLESS STEEL BEZEL
M50607	LOW PROFILE GROMMET

Voltage 12/24VDC
Amp Draw 220mA Amber / White
 180mA Red
 500mA Amber-Green / White-Amber
Dimensions 6.5" W x 2.3" H x 0.6" D
Mounting Two Hole Surface Mount, 5.5" C to C
Connector 4 Leads Blunt Cut, 7"
LEDs 14 (8 Amber/6 Green or White for YGCL-A, WYCL)
Legal Heading W-1
SAE J595 Class 1

- R, Y, YCL, WCL - 8 Selectable Flash Patterns (1 Steady On)
- YGCL-A, WYCL have 11 Selectable Flash Patterns
- 12/24VDC Dual Voltage
- Polycarbonate Lens & Housing
- Mounting Hole with Brass Collars for Riveted Installations
- Class 1 Patterns
- Multi-Lamp Sync Alternate Function
- 5 Year Warranty

4" ROUND WARNING — GROMMET MOUNT



Side View

PART NUMBER	DESCRIPTION
M42701BCL	BLUE CLEAR LENS
M42701R	RED
M42701Y	AMBER
M42701Y-A	AMBER WARNING & PARK/TURN
M42701YCL-A	AMBER CLEAR LENS WARNING & PARK/TURN

Voltage 12/24VDC
Amp Draw R, Y, Y-A, YCL-A: Max 0.9A 12V / BCL: Max 0.6A 12V
Dimensions 4.2" Diam. x 1.6" D
Mounting 4" Round Grommet
Connector Integrated PL-3 + 1 Leads, 11" (+ 2 Leads Y-A, YCL-A)
LEDs 24
Legal Heading W-2M (Blue), W-1M (Red, Amber)
 - Y-A / YCL-A 6 I7 P, W-1M
SAE J595 Class 1 (Red, Amber), J595 Class 2 (Blue)
 - Y-A / YCL-A J222, J2261, J595 CLASS 1

M42701BCL, M42701R, M42701Y

- 12/24VDC Dual Voltage
- 7 Selectable Flash Patterns/ 1 Steady
- Alternate/Sync Provisions
- SAE Class 1 Patterns Red/Amber
- SAE Class 2 Patterns White/Blue
- Fits Standard 4" Grommet (M50400-B Sold Separately)
- 5 Year Warranty

M42701Y-A, M42701YCL-A Additional Features

- 28 Programmable Flash Patterns
- Optional DOT Compliant Amber Park / Front Turn / Rear Turn
- 5 Programmable Priority Modes Allows Turn Signal Override or Warning Light Override
- Discrete Wiring – Dedicated Park/Turn Circuit and Warning Circuits

1" ROUND MICRO EMERGENCY WARNING



PART NUMBER	DESCRIPTION
M09370Y	AMBER
M09370YCL	AMBER CLEAR LENS

Voltage	12.8VDC	• 11 Selectable Flash Patterns
Amp Draw	210mA	• Polycarbonate Lens & Housing
Dimensions	1.0" Diameter	• Synchronized/Alternating Flash
Mounting	Grommet	• Stainless Steel Bezel Included
Connector	4 Leads Blunt Cut, 27"	• Black Vinyl Grommet Included
LED	1	• Includes In line Flasher Module
		• 5 Year Warranty



M50935 STOP / TURN / TAIL LED FLASHER MODULE WITH HIGH LOW



PART NUMBER	DESCRIPTION
M50935	LED FLASHER CONTROL MODULE WITH HI / LOW OUTPUT

Voltage	12.8VDC	• Multi-Function Programmable Flasher and Aux. S/T/T Module with High / Low Output
Dimensions	3.2" W x 1.9" H x 0.6" D	• 28 Programmable Flash Patterns
Mounting	2 Hole Surface, 3-7/8" C to C	• Up to 4 Memory Slots, or Modes, Available
Connector	9 Wires Blunt Cut, 11"	• As Flasher, 12 Amp Max Output – 2 Channels, 6A Per Channel
		• S/T/T Outputs Allow Aux. Lighting Device with 2-Wires to be Connected to Vehicle S/T/T Circuit and Will Illuminate Aux. Light in Low Intensity with Tail Lights and High Intensity for Stop or Turn Functions
		• Can Also be Used to Convert a 4-Wire S/T/T Circuit to a 3-Wire S/T/T Circuit
		• Surface Mounts with 2 Screws
		• 1 Year Warranty



M50935 with 196" Ring of Safety or Qty. (2) 96" Rings of Safety

PROGRAMMABLE EMERGENCY FLASHER



PART NUMBER	DESCRIPTION
M50910	LED FLASHER CONTROL MODULE

Voltage	12.8VDC	• 16 Selectable Flash Patterns
Dimensions	3.2" W x 1.9" H x 0.6" D	• 20 Amp Heavy Duty Flasher
Mounting	2 Hole Surface, 3-7/8" C to C	• 2 Outputs, 10 Amps each
Connector	7 Leads Blunt Cut, 11"	• Simultaneous or Alternate Wig-Wag Flash
		• 1 Year Warranty

M95-SERIES BACK-UP ALARMS



PART NUMBER	DESCRIPTION
M95097	97DB BACK-UP ALARM 12 - 80 VDC MULTI-VOLTAGE
M95102	102DB BACK-UP ALARM 12 - 80 VDC MULTI-VOLTAGE
M95107	107DB BACK-UP ALARM 12 - 80 VDC MULTI-VOLTAGE
M95822	82 - 102DB ADJUSTABLE BACK-UP ALARM 12 - 80 VDC MULTI-VOLTAGE

Voltage	12 - 80 VDC Multi-Voltage	• SAE J994 Compliant Back-Up Alarms
Amp Draw	MAX 1.0A/12V – 0.5A/24V	• Available in 4 Models: Fixed 97dB, 102dB, 107dB, And Self-Adjusting from 82dB to 102dB
Dimensions	4.0" W x 2.8" H x 1.6" D	• Self-Grounding Mounting Base
Mounting	2 Hole Surface 3.25" C to C	• 12 - 80 VDC Multi-Voltage
Connector	2 Studs	• Temperature Range -40 °F to + 185 °F
Legal Heading	Type C, F, or B	• Epoxy-Filled Electronics - Moisture and Dust Resistant
SAE	J994	• Reinforced Nylon Housing
		• Retail Packaging
		• 2 Year Warranty

M96-SERIES POLY-PHONIC GHOST ALARM, HARD-WIRED



PART NUMBER	DESCRIPTION
M96097	97DB B/U POLY-PHONIC GHOST ALARM HARD-WIRED

Voltage	12 - 80 VDC Multi-Voltage	• SAE J994 Compliant
Amp Draw	0.5A 12V / 0.3A 24V	• Poly-Phonic, "Broad Band Static Noise"
Dimensions	4.0" W x 2.8" H x 1.6" D	• 12 - 80 VDC Multi-Voltage
Mounting	2 Hole Surface, 3.25" C to C	• Wire Strain Relief & Jacketed Cable
Connector	2 Wire Blunt Cut, Jacketed, 38"	• Reinforced Nylon Housing
Legal Heading	Type C	• Retail Packaging
SAE	J994	• 2 Year Warranty

M97-SERIES BACK-UP ALARMS, HARD-WIRED



PART NUMBER	DESCRIPTION
M97097	97DB B/U ALARM HARD-WIRED 12 - 80 VDC
M97107	107DB B/U ALARM HARD-WIRED 12 - 80 VDC
M97822	82-102DB B/U ALARM, SELF-ADJUSTING HARD-WIRED

Voltage	12 - 80 VDC Multi-Voltage	• SAE J994 Compliant
Amp Draw	MAX 0.4A 12V / 0.2A 24V	• Available in 4 Models: Fixed 97dB, 107dB And Self-Adjusting from 82dB to 102dB
Dimensions	4.0" W x 2.8" H x 1.6" D	• 12 - 80 VDC Multi-Voltage
Mounting	2 Hole Surface, 3.25" C to C	• Wire Strain Relief & Jacketed Cable
Connector	2 Wire Blunt Cut, Jacketed, 11"	• Reinforced Nylon Housing
Legal Heading	Type C, F, or B	• Retail Packaging
SAE	J994	• 2 Year Warranty

NEW

M98-SERIES 4" ROUND GROMMET MOUNT BACK-UP ALARMS



Shown in Grommet
(Grommet Included)

PART NUMBER	DESCRIPTION
M98097	97DB BACK-UP ALARM, 4" GROMMET MOUNT 12/24VDC
M98102	102DB BACK-UP ALARM, 4" GROMMET MOUNT 12/24VDC

Voltage	12/24VDC Dual-Voltage
Amp Draw	
- M98097	0.2A 12V / 0.1A 24V
- M98102	0.3A 12V / 0.2A 24V
Dimensions	4.3" Diam. x 1.6" D (without grommet)
Mounting	4" Grommet - Included
Connector	PL-3 with 5" Lead
Legal Heading	Type C (M98097), Type F (M98102)
SAE	J994

- 4" Round Back-Up Alarm, Grommet Mount
- M50400-B 4" Grommet INCLUDED
- Available in 97dB or 102dB
- Industry Standard PL-3 Connector
- Reinforced Nylon Housing
- 12/24 VDC Dual-Voltage
- 5 Year Warranty

NEW

M99-SERIES 112DB HEAVY DUTY BACK-UP ALARMS



PART NUMBER	DESCRIPTION
M99112	112DB BACK-UP ALARM HARD-WIRED 12-80 VDC
M99872	87-112DB BACK-UP ALARM, SELF-ADJUSTING 12-80 VDC

Voltage	12-80 VDC Multi-Voltage
Amp Draw	0.8A 12V / 0.5A 24V
Dimensions	5.0" W x 2.9" H x 2.8" D
Mounting	2 Hole Surface, 4.1" Center to Center
Connector	2 Wires, Blunt Cut, 8"
Legal Heading	Type A (112dB), Type F (Adjustable)
SAE	J994


- SAE J994 Compliant Back-Up Alarms
- Available in 112dB Fixed, and 87-112 Self Adjusting
- Self Adjusting M99872 Automatically Adjusts from 87dB to 112dB to Exceed Ambient Noise Levels
- Heavy Duty Cast Iron Housing
- Polycarbonate Front Cover
- 2 Year Warranty

LED STOP/ TURN/TAI LS



**HYBRID COMBO STT + BU
STOP/TURN/TAIL
BACK-UP
LICENSE LIGHTS
TURN SIGNALS**


ALL-IN-ONE STOP/TURN/TAIL & BACK-UP & FLASHING WARNING

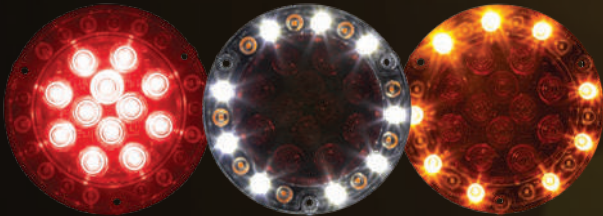

RED TAIL/STOP LIGHT AND OPTIONAL RED TURN

WHITE BACK-UP

OPTIONAL AMBER TURN

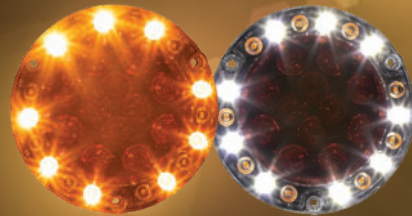

FLASHING AMBER WARNING

OPTIONAL FLASHING WHITE WARNING

5.5" ROUND HYBRID COMBINATION STOP/TURN/TAIL & BACK-UP & AMBER FLASHING WARNING LIGHT — FLANGE MOUNT



M85427R-YCL

PART NUMBER	DESCRIPTION
M85427R-YCL	5.5" ROUND STT & BU & AMBER WARN FLANGE MOUNT

LEDs 30 (12 Red, 9 White, 9 Amber)

Voltage 12.8VDC

Amp Draw 0.6A Max Amp (Stop + Warn)
BU 0.2A, Tail 20mA, Stop 0.2A, Amber Turn 100mA, Warn 0.4A

Dimensions 5.5" Diam. x 0.5" Depth

Mounting 3-Hole Flange Mount (3) 3/16" Holes
Hole Cutouts: 1-3/16" for cable exit

Connector 7 Leads Blunt Cut, 10"

Legal Heading R, I6 S2 T2, W-1 M

DOT/SAE J593, J2040, J2261, J595

- All-In-One S/T/T & Back-Up & Dual Color Amber White Flashing Warning
- SAE J595 Class 1 Warning Device
- 28 Selectable Flash Patterns
- Flash Amber Only, White Only, or Amber / White Dual Color
- Amber Turn for trucks with dedicated turn wire (4-wire S/T/T circuit)
- Patented Hybrid Series with Lightning Optics
- US Patent 8,009,364 8,052,313 8,717,679 B2 11,815,232 B2
- Mounting Screws & Screw Caps Included
- Neoprene Gasket Attached
- 5 Year Warranty



Thin Profile



12 LEDs RED TAIL LIGHT



12 LEDs RED STOP LIGHT




9 LEDs WHITE BACK-UP LIGHT



9 LEDs AMBER WARNING & TURN

Fits Standard 4" Cut-Out

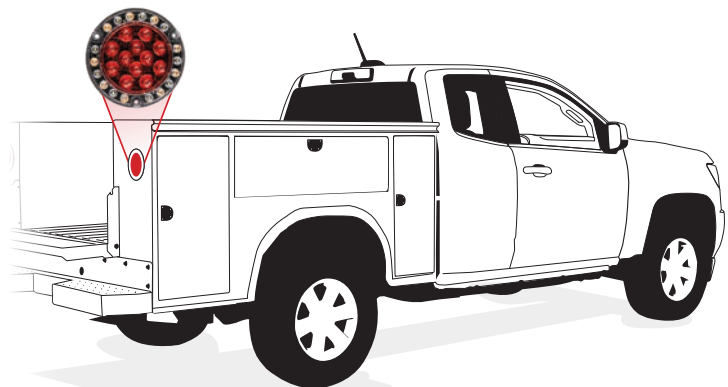

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

ROUND & 1" X 17" HYBRID COMBINATION LIGHTS

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

5.5" ROUND HYBRID COMBO STOP/TURN/TAIL & BACK-UP & WORK LIGHT — FLANGE MOUNT



310 Lumen Back-Up /
1,000 Lumen Work Light

PART NUMBER	DESCRIPTION
M85437R-WL	5.5" ROUND HYBRID STT & BACK UP & WORK LIGHT

LEDs	21 (12 Red, 9 White)	<ul style="list-style-type: none"> • 5.5" Round Flange Mount STT & BU Light • Dedicated Wire for 1,000 Lumens Work Light • Patented Hybrid Series with Lightning Optics • US Patent No 8,009,364 8,052,313 8,717,679 B2 11,815,232 B2 • Neoprene Gasket Attached • Mounting Screws and Screw Caps Included • Polycarbonate Lens & Housing • Same Footprint as 4" Grommet Mount • 5 Year Warranty
Voltage	12.8VDC	
Amp Draw	BU 0.2A, Tail 20mA, Stop 0.2A, WL 1.0A	
Dimensions	5.5" Diam x 0.5" Depth	
Mounting	3-Hole Flange Mount (3) 3/16" holes Hole cutouts: 1-3/16" for cable exit	
Connector	5 Leads Blunt Cut, 10"	
Legal Heading	R, I6 S2 T2	
DOT/SAE	J593, J2040, J2261	
Lumens	1,000 (Work Light), 310 (Backup)	

5.5" ROUND HYBRID COMBO STOP/TURN/TAIL & BACK-UP — FLANGE MOUNT




PART NUMBER	DESCRIPTION
M85417R	5.5" ROUND HYBRID STT & BACK UP LIGHT
M85417R-X	5.5" ROUND HYBRID STT & BACK UP LIGHT – BULK PACK
M85417R-KIT	5.5" ROUND HYBRID STT & BACK UP LIGHT + (2) M50900 PL3 PIGTAIL

LEDs	21 (12 Red, 9 White)	<ul style="list-style-type: none"> • 5.5" Round Flange Mount STT & BU Light • Patented Hybrid Series with Lightning Optics • US Patent No 8,009,364 8,052,313 8,717,679 B2 • Neoprene Gasket Attached • Mounting Screws and Screw Caps Included • Polycarbonate Lens & Housing • Same Footprint as 4" Grommet Mount • 5 Year Warranty
Voltage	12.8VDC	
Amp Draw	BU 0.2A, Tail 20mA, Stop 0.2A	
Dimensions	5.5" Diam x 0.5" Depth	
Mounting	3-Hole Flange Mount (3) 3/16" holes Hole cutouts: 1-3/16" for cable exit	
Connector	(2) PL-3 Female, 10" Wire <i>*M85417R-KIT includes (2) M50900</i>	
Legal Heading	R, I6 S2 T2	
DOT/SAE	J593, J2040, J2261	



1" X 17" HYBRID COMBINATION STT & BACK-UP

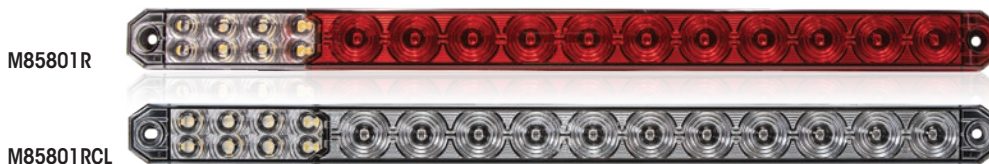

M85801R

M85801RCL



PART NUMBER	DESCRIPTION
M85801R	STT & BACK-UP
M85801R-X	STT & BACK-UP – .180 BULLET CONNECTORS
M85801RCL	STT & BACK-UP – CLEAR LENS

LEDs	27 (11 Red, 16 White)	<ul style="list-style-type: none"> • Hybrid Combo STT & Back-Up • Thin Design – Only 1.2" Wide • Horizontal or Vertical Mount • Available with Red Lens (R) or Clear Lens (RCL) • Mounting Screws and Screw Caps Included • Polycarbonate Lens & Housing • 5 Year Warranty
Voltage	12.8VDC	
Amp Draw	0.4A Max	
Dimensions	17" L x 1.2" W x 0.5" D	
Mounting	2 Hole Surface, 1 6-1/8" C to C	
Connector	4 Leads, Blunt Cut, 12" (.180 Bullets M85801R-X)	
Legal Heading	R, I6 S2 T2	
DOT/SAE	J593, J2040, J2261	

6" OVAL HYBRID COMBINATION LIGHTS

6" OVAL HYBRID THIN-PROFILE COMBINATION STT & BACK-UP



Optional M50146 Bezel



Optional M50607 Grommet

PART NUMBER	DESCRIPTION
M63354-HYB	COMBINATION STT & BACK-UP
M63350-TAPE	OPTIONAL MOUNTING TAPE
M50607	LOW PROFILE GROMMET
M50146	STAINLESS STEEL BEZEL

LEDs	12 (8 Red / 4 White)	• Ultra Thin 0.5" Low Profile Design
Voltage	12.8VDC	• Polycarbonate Lens & Housing
Amp Draw	BU 150mA / Stop 180mA	• Completely Sealed Electronics
Dimensions	6.5" W x 2.3" H x 0.5" D	• Patented Lightning Optics
Mounting	2 Hole Surface, 5-1/2" C to C, Grommet, or Tape	• US Patent No. 8,009,364
Connector	(2) Female PL3, 6"	• US Patent No. 8,717,679 B2
Legal Heading	R, I6 S2 T2	• 5 Year Warranty
DOT/SAE	J593, J2040, J2261	



Optional M50607 Grommet



Optional M63350 Tape

NEW

6" OVAL HYBRID COMBO STT & BACK-UP — SURFACE MOUNT OR FLANGE MOUNT



M85620R Surface Mount



M85620R Side View



M85623R Flange Mount



M85623R Side View

PART NUMBER	DESCRIPTION
M85620R	6" OVAL HYBRID COMBINATION S/T/T & BU
M85623R	6" OVAL HYBRID S/T/T & BU – FLANGE MOUNT

LEDs	13
Voltage	12.8VDC
Amp Draw	
- M85620R	Stop 150mA, Tail 10mA, B/U 150mA
- M85623R	Stop 250mA, Tail 15mA, B/U 150mA
Dimensions	
- M85620R	7.8" W x 3.5" H x 0.6" D
- M85623R	7.9" W x 3.3" H x 1.7" D
Mounting	
- M85620R	2 Hole Surface, 7.25" C to C
- M85623R	2 Hole Flange, 7.25" C to C
Connector	
- M85620R	Qty. (2) PL-3, 7" Leads
- M85623R	Qty. (2) PL-3, Integrated
Legal Heading	I6 S2 T2 R
DOT/SAE	J593, J2040, J2261

- 6" Oval Hybrid Combo Stop/Turn/Tail & Back-Up
- Available in Surface Mount or Flange Mount
- Industry Standard 7.25" Bolt Spacing
- M85623R Requires 6.7" x 2.4" Cutout
- Qty. (2) Industry Standard PL-3 Three-Pin Connectors
- Polycarbonate Lens & Housing
- DOT Compliant in Both Horizontal or Vertical Mount
- 5 Year Warranty

6" OVAL & 4" ROUND HYBRID COMBO STT & BU

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

NEW

M85621R 6" OVAL HYBRID COMBO STT & BACK-UP — GROMMET MOUNT



Side View

PART NUMBER DESCRIPTION

M85621R 6" OVAL HYBRID S/T/T & BU — GROMMET MOUNT

LEDs	13 (10 Red, 3 White)	• 6" Oval Hybrid Combo Stop/Turn/Tail & Back-Up
Voltage	12.8VDC	• Fits 6" Oval Grommet (M50600-B Sold Separately)
Amp Draw	Stop 250mA, Tail 10mA, B/U 150mA	• Qty. (2) Industry Standard PL-3 Three-Pin Connectors Integrated (Uses M50900 Pigtail)
Dimensions	6.5" W x 2.3" H x 1.6" D	• Polycarbonate Lens & Housing
Mounting	6" Grommet	• DOT Compliant in Both Horizontal and Vertical Mount
Connector	Qty. (2) PL-3 Integrated	• 5 Year Warranty
Legal Heading	I6 S2 T2 R	
DOT/SAE	J593, J2040, J2261	

NEW

M85601R 6" OVAL HYBRID COMBO STT & BACK-UP — GROMMET MOUNT



PART NUMBER DESCRIPTION

M85601R 6" OVAL COMBINATION S/T/T + BACK-UP, GROMMET MOUNT

M50940 4-PIN DryFit TO PL-3 AND PL-2 SPLITTER ADAPTER

LEDs	14 (10 Red, 4 White)	• 6" Oval Hybrid Combo Stop/Turn/Tail & Back-Up Lamp
Voltage	12.8VDC	• Fits 6" Oval Grommet (M50600-B Sold Separately)
Amp Draw	Stop 180mA, Tail 10mA, B/U 250mA	• M50940 Adapter Pigtail Included: 4-Pin DryFit to PL-3 + PL-2
Dimensions	6.5" W x 2.3" H x 1.4" D	• DOT Compliant in Both Horizontal and Vertical Mount
Mounting	6" Grommet	• Acrylic Lens / ABS Housing
Connector	Integrated 4-Pin DryFit (Included)	• 5 Year Warranty
Legal Heading	I6 S2 T2 R	
DOT/SAE	J593, J2040, J2261	

NEW

M85401R 4" ROUND HYBRID COMBO STT & BACK-UP — GROMMET MOUNT



PART NUMBER DESCRIPTION

M85401R 4" ROUND COMBINATION S/T/T + BACK-UP, GROMMET MOUNT

M50940 4-PIN DryFit TO PL-3 AND PL-2 SPLITTER ADAPTER

LEDs	13 (9 Red, 4 White)	• 4" Round Hybrid Combo Stop/Turn/Tail & Back-Up Lamp
Voltage	12.8VDC	• Fits 4" Round Grommet (M50400-B Sold Separately)
Amp Draw	Stop 180mA, Tail 10mA, B/U 250mA	• M50940 Adapter Pigtail Included: 4-Pin DryFit to PL-3 + PL-2
Dimensions	4.3" Diam. x 1.4" D	• Acrylic Lens / ABS Housing
Mounting	4" Grommet	• 5 Year Warranty
Connector	Integrated 4-Pin DryFit (Included)	
Legal Heading	I6 S2 T2 R	
DOT/SAE	J593, J2040, J2261	

MaxxHeat HEATED LED STOP/TURN/TAIL LIGHTS

4" ROUND STOP / TURN / TAIL WITH MaxxHeat HEATED LENS TECHNOLOGY



MaxxHeat



M42358RDF-MH
BACK

PART NUMBER	DESCRIPTION
M42358R-MH	4" RED STT WITH PL-3 MaxxHeat
M42358RDF-MH	4" RED STT WITH DryFit MaxxHeat


LEDs	6
Voltage	12.8VDC
Amp Draw	
- Heater Off:	Stop/Turn: 0.4A Tail: 0.1A
- Heater On:	Stop/Turn: 2.3A Tail: 2.0A
Dimensions	4.3" Diam. x 1.8" D
Mounting	Grommet
Connector	PL-3 or DryFit
Legal Heading	I6 S2 T2
DOT/SAE	J2040, J2261

- Patented MaxxHeat® Technology
- US Patent No. 11,339,947
- No Additional Wiring Required
- Multi-Stage Heater (High/Med/Low/Off)
- Smart Electronics Reduce Amp Draw To Just 0.7Amp With Heater On
- Polycarbonate Lens & Housing
- Completely Sealed Electronics
- 5 Year Warranty

6" OVAL STOP / TURN / TAIL WITH MaxxHeat HEATED LENS TECHNOLOGY



MaxxHeat

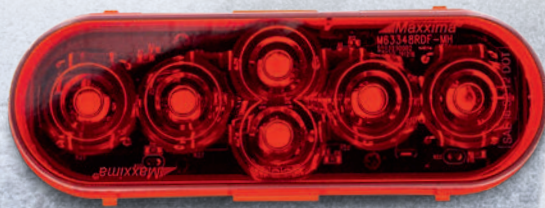

PART NUMBER	DESCRIPTION
M63348R-MH	6" OVAL STT WITH PL-3 MaxxHeat

LEDs	6
Voltage	12.8VDC
Amp Draw	
- Heater Off:	Stop/Turn: 0.4A Tail: 0.1A
- Heater On:	Stop/Turn: 2.3A Tail: 2.0A
Dimensions	6.4" W x 2.2" H x 1.7" D
Mounting	6" Grommet
Connector	PL-3
Legal Heading	I6 S2 T2
DOT/SAE	J2040, J2261

- Patented MaxxHeat® Technology
- US Patent No. 11,339,947
- No Additional Wiring Required
- Multi-Stage Heater (High/Med/Low/Off)
- Smart Electronics Reduce Amp Draw To Just 0.7Amp With Heater On
- Polycarbonate Lens & Housing
- Completely Sealed Electronics
- 5 Year Warranty

4" ROUND LED STOP/TURN/TAIL LIGHTS

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

NEW

4" ROUND STOP / TURN / TAIL — 6 LED

5 Lightning



M42346R BACK
PL-3 Connector

M42344R BACK
DryFit Connector



M42346R-KIT (Light + Grommet + Pigtail)



M42346RBU-KIT (STT Light + Back-Up Light)

PART NUMBER	DESCRIPTION
M42346R	4" RED STT WITH PL-3 CONNECTOR
M42346R-X	4" RED STT WITH PL-3 CONNECTOR – BULK PACK
M42346R-KIT	4" RED STT WITH PL-3 CONNECTOR – KIT WITH GROMMET, PIGTAIL
M42346RBU-KIT	4" RED STT WITH PL-3 CONNECTOR – KIT WITH BACK-UP
M42344R	4" RED STT WITH DryFit CONNECTOR
M42344R-X	4" RED STT WITH DryFit CONNECTOR – BULK PACK

- | | | |
|----------------------|-------------------------|---|
| LEDs | 6 | • 6 LED Stop / Turn / Tail |
| Voltage | 12.8VDC | • Available with PL-3 or DryFit Connector |
| Amp Draw | 200mA / 15mA | • Also Available in Retail Kits (see below) |
| Dimensions | 4.3" Diam. x 1.8" Depth | • Patented Lightning Optics |
| Mounting | Grommet | • US Patent No. 8,009,364 |
| Connector | PL-3 or DryFit | • US Patent No. 8,717,679 B2 |
| Legal Heading | I6 S2 T2 | • Superior Lens Optics |
| DOT/SAE | J2040, J2261 | • Sealed Moisture Proof Electronics |
| | | • Polycarbonate Lens & Housing |
| | | • 5 Year Warranty |

4" ROUND STOP / TURN / TAIL — 9 LED

5 Lightning



M42322RCL
RED CLEAR LENS



M42321R
SURFACE MOUNT



M42322RDF
BACK



M42322R-DV



M42322R-DVDF

PART NUMBER	DESCRIPTION
M42322R	4" RED STT – GROMMET MOUNT
M42322R-X	4" RED STT – GROMMET MOUNT – BULK PACK
M42322RCL	4" RED/CLEAR LENS STT – GROMMET MOUNT
M42322R-DV	4" RED STT – GROMMET MOUNT 12/24VDC DUAL VOLTAGE
M42322RDF	4" RED STT, DryFit
M42322RDF-X	4" RED STT, DryFit – BULK PACK
M42322RCLDF	4" RED/CLEAR LENS STT, DryFit
M42322R-DVDF	4" RED STT 12/24VDC DUAL VOLTAGE, DryFit
M42321R	4" RED STT, BLUNT CUT – SURFACE MOUNT

- | | | |
|----------------------|--------------------------|---|
| LEDs | 9 | • 9 LED Stop / Turn / Tail |
| Voltage | 12.8VDC | • Patented Lightning Optics |
| - DV Models | 12/24VDC | • US Patent No. 8,009,364 |
| Amp Draw | MAX: 170mA / 15mA | • US Patent No. 8,717,679 B2 |
| - DV Models | 160mA 12V / 80mA 24V | • Superior Lens Optics |
| Dimensions | 4.3" Diam. x 1.8" D | • Sealed Moisture Proof Electronics |
| - M42321R | 5.5" Diam. x 0.75" D | • Polycarbonate Lens & Housing |
| Mounting | Grommet | • Available in 12V or 12/24VDC |
| - M42321R | Surface, 3 Hole, 5" Bolt | • DV Dual Voltage Models:
Auto Select 12/24VDC Voltage |
| Connector | PL-3 or DryFit | • 5 Year Warranty |
| - M42321R | 3 Wires, Blunt Cut, 12" | |
| Legal Heading | I6 S2 T2 | |
| DOT/SAE | J2040, J2261 | |

4" ROUND LED STOP/TURN/TAIL LIGHTS

4" ROUND STT VANTAGE SERIES — 32 LED

5



PART NUMBER	DESCRIPTION
M42320R	4" RED STT WITH VANTAGE OPTICS

LEDs	32	• 4" Round STT
Voltage	12.8VDC	• Superior Lens Optics
Amp Draw	250mA	• Sealed Moisture Proof Electronics
Dimensions	4.3" Diam. x 2.0" Depth	• Polycarbonate Lens & Housing
Mounting	Grommet	• 5 Year Warranty
Connector	PL-3	
Legal Heading	I6 S2 T2	
DOT/SAE	J2040, J2261	

4" ROUND STT — 44 LED

10



PART NUMBER	DESCRIPTION
M42100R	4" RED STT — GROMMET MOUNT

LEDs	44	• 4" Round STT
Voltage	12.8VDC	• WSI – Wide Spectrum Illumination
Amp Draw	170mA	• Sealed Moisture Proof Electronics
Dimensions	4.3" Diam. x 2.0" Depth	• Polycarbonate Lens & Housing
Mounting	Grommet	• 10 Year Warranty
Connector	PL-3	
Legal Heading	I6 S2 T2	
DOT/SAE	J2040, J2261	

4" ROUND STT — 56 LED

10



PART NUMBER	DESCRIPTION
M56100R-A	4" RED STT — GROMMET MOUNT

LEDs	56	• Our Classic 56 LEDs Now With A New Lens Design
Voltage	12.8VDC	• Sealed Moisture Proof Electronics
Amp Draw	300mA / 20mA	• Polycarbonate Lens & Housing
Dimensions	4.3" Diam. x 2.0" Depth	• 10 Year Warranty
Mounting	Grommet	
Connector	PL-3	
Legal Heading	I6 S2 T2	
DOT/SAE	J2040, J2261	

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

4" ROUND & 6" OVAL LED STOP/TURN/TAIL LIGHTS

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

4" ROUND STT FLANGE MOUNT — 12 LED



Side View

PART NUMBER	DESCRIPTION
M42323R-A	4" RED STT – FLANGE MOUNT

LEDs	12	• 4" Round STT
Voltage	12.8VDC	• Industry Standard Integrated
Amp Draw	190mA / 10mA	Flange Mount
Dimensions	5.5" Diam. x 1.7" D	• PL-3 Connector
Mounting	3 Hole Flange, 5" Bolt Circle, 4.5" Hole Cutout	• Sealed Moisture Proof Electronics
Connector	PL-3	• Polycarbonate Lens & Housing
Legal Heading	I6 S2 T2	• 5 Year Warranty
DOT/SAE	J2040, J2261	

4" ROUND STT FLANGE MOUNT — 7 LED — BULK PACK



PART NUMBER	DESCRIPTION
M42354R-X	4" RED STT WITH PL-3 CONNECTOR

LEDs	7	• Outer Red Reflector
Voltage	12.8VDC	• Thin Low Profile Design
Amp Draw	160mA	• Patented Lightning Optics
Dimensions	5.6" Diam. x 0.7" Depth	• US Patent No. 8,009,364
Mounting	3 Hole Flange	• US Patent No. 8,717,679 B2
Connector	PL-3	• Acrylic Lens/Polycarbonate Housing
Legal Heading	A, I6 S2 T2	• Neoprene Gasket Included
DOT/SAE	J594, J2040, J2261	• 5 Year Warranty

6" OVAL STT FLANGE MOUNT — 10 LED




Side View

PART NUMBER	DESCRIPTION
M63323R-A	OVAL RED STOP/TURN/TAIL – FLANGE MOUNT

LEDs	10	• 6" Oval Stop/Turn/Tail
Voltage	12.8VDC	• Industry Standard Integrated
Amp Draw	100mA / 10mA	Flange Mount
Dimensions	7.8" W x 3.5" H x 0.7" D	• PL-3 Connector
Mounting	2 Hole Flange, 7-1/4" C to C	• Horizontal or Vertical Mount
Connector	PL-3	• Polycarbonate Lens & Housing
Legal Heading	I6 S2 T2	• 5 Year Warranty
DOT/SAE	J2040, J2261	

6" OVAL LED STOP/TURN/TAIL LIGHTS

6" OVAL STT SURFACE, GROMMET, OR TAPE MOUNT — 14 LED



OPTIONAL
M50146 BEZEL



OPTIONAL
M50607 GROMMET

PART NUMBER	DESCRIPTION
M63350R	OVAL RED STT WITH BLUNT CUT WIRES
M63351R-X	OVAL RED STT WITH .180 BULLETS – BULK PACK
M63352R-X	OVAL RED STT WITH PL-3 CONNECTOR – BULK PACK
M63350-TAPE	OPTIONAL MOUNTING TAPE
M50607	LOW PROFILE GROMMET
M50146	STAINLESS STEEL BEZEL

LEDs	14	<ul style="list-style-type: none"> • 6" Oval STT or Center High Mount Stop Light (CHMSL) • Also Available in Bulk Pack (-X) • Polycarbonate Lens & Housing • Reinforced Riveted Mounting Holes • Screw Hole Covers Included • 5 Year Warranty
Voltage	12.8VDC	
Amp Draw	230mA / 15mA	
Dimensions	6.5" W x 2.3" H x 0.5" D	
Mounting	2 Hole Surface, 5.5" C to C, or <i>Optional</i> M50607 Grommet	
Connector		
- M63350R	3 Wires, Blunt Cut, 6"	
- M63351R	3 Wires, .180 Bullets, 6"	
- M63352R	3 Wires PL-3, 6"	
Legal Heading	I6 S2 T2 U3	
DOT/SAE	J2040, J2261, J1957	



Optional M63350 Tape

6" OVAL STT SURFACE, GROMMET, OR TAPE MOUNT — 6 LED



Lightning



PART NUMBER	DESCRIPTION
M63354R	OVAL RED STT

LEDs	6	<ul style="list-style-type: none"> • Polycarbonate Lens & Housing • Patented Lightning Optics • US Patent No. 8,009,364 • US Patent No. 8,717,679 B2 • Optional M50607 Low Profile Grommet • Optional M50146 Bezel • 5 Year Warranty
Voltage	12.8VDC	
Amp Draw	100mA	
Dimensions	6.5" W x 2.3" H x 0.5" D	
Mounting	2 Hole, Grommet, or Tape	
Connector	PL-3 Hardwired, 6"	
Legal Heading	I6 S2 T2	
DOT/SAE	J2040, J2261	

6" OVAL STT SURFACE MOUNT — 10 LED



M63320R-A

M63320R-ACH



M63320RCL-A
Clear Lens –
Lights Up Red

PART NUMBER	DESCRIPTION
M63320R-A	6" OVAL RED S/T/T, SURFACE MOUNT BLACK
M63320R-ACH	6" OVAL RED S/T/T, SURFACE MOUNT CHROME
M63320RCL-A	6" OVAL RED CLEAR LENS S/T/T, SURFACE MOUNT BLACK

LEDs	10	<ul style="list-style-type: none"> • 6" Oval Surface Mount • Industry Standard 7.25" Bolt Spacing • Avail. in Black or Chrome • Available in Red or Clear Lens • Horizontal or Vertical Mount • 5 Year Warranty
Voltage	12.8VDC	
Amp Draw	100mA / 10mA	
Dimensions	7.8" W x 3.5" H x 0.7" D	
Mounting	2 Hole Surface, 7.25" C to C	
Connector	3 Leads Blunt Cut, 13"* *R-ACH 7" Leads	
Legal Heading	I6 S2 T2	
DOT/SAE	J2040, J2261	

6" OVAL LED STOP/TURN/TAIL LIGHTS

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

NEW

6" OVAL STT — 6 LED

5 Lightning



NEW



M63346RDF with DryFit Connector



M63346R-KIT with Grommet & Pigtail

NEW

PART NUMBER	DESCRIPTION
M63346R	OVAL RED STT GROMMET MOUNT
M63346R-X	OVAL RED STT GROMMET MOUNT, 6 LED – BULK PACK
M63346RDF	OVAL RED STOP/TURN/TAIL, 6 LED, DryFit
M63346RDF-X	OVAL RED STOP/TURN/TAIL, 6 LED, DryFit – BULK PACK
M63346R-KIT	OVAL RED STT GROMMET MOUNT, 6 LED – KIT WITH GROMMET, PIGTAIL

LEDs	6	• 6" Oval STT
Voltage	12.8VDC	• Available in PL-3 or DryFit
Amp Draw	130mA	• Also Available in Bulk Pack (-X)
Dimensions	6.4" W x 2.2" H x 1.7" D	• Patented Lightning Optics
Mounting	Grommet	• US Patent No. 8,009,364
Connector	PL-3, or DryFit	• US Patent No. 8,717,679 B2
Legal Heading	I6 S2 T2	• Sealed Moisture Proof Electronics
DOT/SAE	J2040, J2261	• Polycarbonate Lens & Housing
		• 5 Year Warranty

6" OVAL STT — 9 LED

5 Lightning



M63322RCL Red Clear Lens

PART NUMBER	DESCRIPTION
M63322R	OVAL RED STT – GROMMET MOUNT
M63322R-X	OVAL RED STT – GROMMET MOUNT – BULK PACK
M63322RCL	OVAL RED/CLEAR LENS STT – GROMMET MOUNT
M63322RDF	OVAL RED STT – GROMMET MOUNT – DryFit CONNECTOR
M63322RDF-X	OVAL RED STT – GROMMET MOUNT – DryFit BULK PACK

LEDs	9	• 6" Oval STT
Voltage	12.8VDC	• Also Available in Bulk Pack (-X)
Amp Draw	190mA	• Patented Lightning Optics
Dimensions	6.4" W x 2.2" H x 1.7" D	• US Patent No. 8,009,364
Mounting	Grommet	• US Patent No. 8,717,679 B2
Connector	PL-3 or DryFit	• Sealed Moisture Proof Electronics
Legal Heading	I6 S2 T2	• Polycarbonate Lens & Housing
DOT/SAE	J2040, J2261	• 5 Year Warranty

6" OVAL STT — 60 LED

10 Year Warranty



PART NUMBER	DESCRIPTION
M63100R	OVAL RED STT – PL-3

LEDs	60	• 6" Oval STT
Voltage	12.8VDC	• Sealed Moisture Proof Electronics
Amp Draw	300mA	• Polycarbonate Lens & Housing
Dimensions	6.4" W x 2.2" H x 1.7" D	• 10 Year Warranty
Mounting	Grommet	
Connector	PL-3	
Legal Heading	I6 S2 T2	
DOT/SAE	J2040, J2261	

LED STOP/TURN/TAIL LIGHTS

3" X 5" RECTANGULAR STT



PART NUMBER	DESCRIPTION
M42213R-A	RECTANGULAR RED STT
M42213RCL-A	RECTANGULAR RED/CLEAR LENS STT

LEDs	10	• Horizontal or Vertical Mount
Voltage	12.8VDC	• Available in Red or Clear Lens
Amp Draw	250mA / 20mA	• Integrated PL-3 Connector
Dimensions	5.3" L x 3.4" W x 1.3"D	• Acrylic Lens
Mounting	Rectangle Grommet	• Polycarbonate Housing
Connector	PL-3	• 5 Year Warranty
Legal Heading	I6 S2 T2	
DOT/SAE	J2040, J2261	

NEW



3" X 5" RECTANGULAR STT WITH GLOW EDGE



PART NUMBER	DESCRIPTION
M42215R	3" X 5" RED STOP/TURN/TAIL WITH GLOW EDGE

LEDs	42 (12 + 30 in Glow Edge)	• 3" x 5" Rectangular Stop/Turn/Tail
Voltage	12.8VDC	• Glow Edge Illuminates in Tail Light
Amp Draw	Stop 0.4A / Tail 0.1A	• DOT Compliant Horizontal or Vertical Mount
Dimensions	3.4" W x 5.3" H x 1.3"D	• Integrated PL-3 Connector
Mounting	Rectangular Grommet	• Polycarbonate Lens & Housing
Connector	Integrated PL-3	• 5 Year Warranty
Legal Heading	I6 S2 T2	
DOT/SAE	J2040, J2261	

1" X 15" RECTANGULAR STT



PART NUMBER	DESCRIPTION
M63318R-A	RED
M63318RCL-A	RED CLEAR LENS
M63318R-A-GSKT	RED WITH GASKET

LEDs	10	• 15" Surface Mount STT
Voltage	12.8VDC	• Horizontal & Vertical 2 Hole Surface Mount
Amp Draw	250mA	• Compact Thin Low Profile Design
Dimensions	15.4" L x 1.2" W x 0.7" D	• 3 Blunt Cut 14" Leads
Mounting	Two Hole Surface	• Sealed Moisture Proof Electronics
Connector	3 Leads, Blunt Cut, 14"	• Polycarbonate Lens & Housing
Legal Heading	I6 S2 T2	• 10 Year Warranty
DOT/SAE	J2040, J2261	

1" X 15" RECTANGULAR CENTER HIGH MOUNT STOP LIGHT (CHMSL)



PART NUMBER	DESCRIPTION
M63319R	CHMSL, CENTER HIGH MOUNT STOP LIGHT / ID BAR

LEDs	9	• Dual Function Operation
Voltage	12.8VDC	• Polycarbonate Lens & Housing
Amp Draw	150mA / 20mA	• Sleek Low Profile Design
Dimensions	15.4" L x 1.2" W x 0.7" D	• Two Hole Surface Mount-Horizontal Only
Mounting	Two Hole Surface Mount	• 5 Year Warranty
Connector	3 Leads, Blunt Cut, 14"	
Legal Heading	P2 P3 U3	
DOT/SAE	J592, J2042, J1957	

THREE STUD BOX LIGHTS

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

THIN LOW PROFILE RECTANGULAR THREE STUD STT/BU BOX LIGHT



PART NUMBER	DESCRIPTION
M42221	STT/BACK-UP

LEDs	9 Red 10 White	• 3-Stud Box Light
Voltage	12.8VDC	• STT/Back-Up Function
Amp Draw	Back-Up 200mA STT 140mA	• Built In Reflector
Dimensions	6.5" H x 5.3" W x 1.4" D	• Sealed Corrosion Proof Electronics
Mounting	3-Stud	• 5 Year Warranty
Connector	3 Leads Blunt Cut, & Ground Stud	
Legal Heading	A R I S T	
DOT/SAE	J585, J586, J588, J593, J594	

RECTANGULAR THREE STUD STT/BU BOX LIGHT W/O & W/ LED LICENSE LIGHT



PART NUMBER	DESCRIPTION
M42220	THREE STUD LED BOX STYLE MULTI FUNCTION LIGHT – STT / BU
M42228L	THREE STUD LED BOX STYLE MULTI FUNCTION LIGHT – STT / BU + LICENSE LIGHT

LEDs	42 (STT: 16, BU: 22, LICENSE: 4)	• 3-Stud Universal Box Light
Voltage	12.8VDC	• With LED License Light
Amp Draw	B/U 290mA Stop 150mA, License 60mA	• And Stop/Turn/Tail & Back-Up
Dimensions	5.8" W x 6.8" H x 3.3" D	• Built In Reflex Reflector
Mounting	3-Stud	• High Impact Acrylic Lens
Connector	3 Leads Blunt Cut, 16" & Ground Stud	• 5 Year Warranty
Legal Heading	A 16 R S2 T2 (and L - M42228L)	
DOT/SAE	J587, J593, J594, J2040, J2261	

RECTANGULAR THREE STUD OEM BOX LIGHT WITH METRIPACK CONNECTOR & LED LICENSE LIGHT



PART NUMBER	DESCRIPTION
M42222	LED STT/BACK-UP
M42223L	LED STT/BACK-UP + LICENSE LIGHT
M50930	REPLACEMENT PIGTAIL

LEDs	38 (STT: 16, BU: 22)	• 3-Stud OEM-Style Box Light
- M42222	42 (STT: 16, BU: 22, License: 4)	• LED Stop/Turn/Tail & LED Back-Up
- M42223L		• Model M42223L with LED License Light
Voltage	12.8VDC	• OEM 5-Pin MetriPack Connector
Amp Draw	B/U 290mA Stop 150mA, License 60mA	• Optional M50934 Sold Separately
Dimensions	5.8" W x 6.8" H x 3.1" D (w/o studs)	• Hi Impact Acrylic Lens/Polycarbonate Housing
Mounting	3-Stud	• 5 Year Warranty
Connector	5 pin MetriPack 280, RH side	
Legal Heading	A 16 R S2 T2 (and L - M42223L)	
DOT/SAE	J593, J594, J2040, J2261 (J587 - M42223L)	

LED S/T/T AND AUX. STOP / AUX. TURN SIGNALS

2" X 4" RECTANGULAR SURFACE OR TAPE MOUNT STT

5



PART NUMBER	DESCRIPTION
M42206R	RED STT SURFACE MOUNT
M42206RDF-X	RED STT SURFACE MOUNT, DryFit CONNECTOR
M42206-ADHESIVE	OPTIONAL MOUNTING TAPE

LEDs	14	• Ultra Thin 0.4" Design
Voltage	12.8VDC	• Also Available in Bulk Pack (-X)
Amp Draw	230mA	• Polycarbonate Lens & Housing
Dimensions	4.6" L x 2.5" W x 0.4" D	• Completely Sealed
Mounting	2 Hole Surface, 3-7/8" C to C, <i>or</i> Optional Adhesive Tape	• Two Hole or Tape Mount
Connector	Three 7" Leads DryFit (M42206RDF-X)	• Includes Caps to Cover Screws
Legal Heading	I S T	• 5 Year Warranty
DOT/SAE	J585, J586, J588	

2-1/2" CLEARANCE / AUXILIARY TURN

5



PART NUMBER	DESCRIPTION
M11300YAT	AMBER AUX TURN

LEDs	3	• Aux Turn
Voltage	12.8VDC	• Sealed Moisture Proof Electronics
Amp Draw	40mA	• Solid State Circuit Board
Dimensions	2.5" Diam. x 0.8" Depth	• Polycarbonate Lens & Housing
Mounting	Grommet	• 5 Year Warranty
Connector	3 Leads Blunt Cut, 6"	
Legal Heading	P2 P3 PC2	
DOT/SAE	J592, J2042	

3/4" MINI CLEARANCE / AUXILIARY STOP & CLEARANCE / AUXILIARY TURN

5



PART NUMBER	DESCRIPTION
M09300RAS	RED AUX STOP, .180 BULLETS
M09300YAT	AMBER AUX TURN, .180 BULLETS

LEDs	3	• 3/4" Mini Aux Stop/Turn
Voltage	12.8VDC	• Also Available in Bulk Pack (-X)
Amp Draw		• Polycarbonate Lens & Housing
- RAS	60mA / 25mA	• Not For Stand Alone Use
- YAT	70mA / 35mA	• Includes M50112 Stainless Steel Bezel
Dimensions	3/4" Diam.	• 5 Year Warranty
Mounting	3/4" Hole	
Connector	3 Leads .180 Bullets, 10"	
Legal Heading	P2 P3 PC2	
DOT/SAE	J592, J2042	

1.25" LOW PROFILE GROMMET OR SURFACE MOUNT CLEARANCE / AUXILIARY STOP — BULK PACK

5

Lightning



PART NUMBER	DESCRIPTION
M0941ORAS-X	RED STT/CM P2 BULK ONLY
M50118	STAINLESS STEEL BEZEL

LEDs	6	• Bulk Pack Only
Voltage	12.8VDC	• Ultra Thin Low Profile Design
Amp Draw	80mA	• Patented Lightning Lens Optics
Dimensions	1-1/4" Diam.	• US Patent No. 8,009,364
Mounting	Grommet 3/4" Hole or Tape	• US Patent No. 8,717,679 B2
Connector	3 Leads .180 Bullets, 7"	• Polycarbonate Lens & Housing
Legal Heading	P2 P3 PC2	• Low LED Amp Draw
DOT/SAE	J592, J2042	• 5 Year Warranty

LED BACK-UP LIGHTS

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

NEW

4" ROUND BACK-UP — GROMMET MOUNT 18 LED

5 Lightning



NEW

12/24V DUAL VOLTAGE

NEW



M42324A-KIT with Grommet & Pigtail

M42324-A PL-3 Connector

M42324-ADF DryFit Connector

PART NUMBER	DESCRIPTION
M42324-A	4" ROUND BACK-UP SERIES -A WITH PL-3
M42324-AX	4" ROUND BACK-UP SERIES -A WITH PL-3 — BULK PACK
M42324A-KIT	4" ROUND BACK-UP KIT with GROMMET & PIGTAIL
M42324-ADF	4" ROUND BACK-UP SERIES -A DryFit
M42324-ADFX	4" ROUND BACK-UP SERIES -A DryFit — BULK PACK
M42324-ADV	4" WHITE BACK-UP — DUAL VOLTAGE

LEDs	18	• DOT FMVSS108 Compliant for 1-Lamp and 2-Lamp Simultaneously
Voltage	12.8VDC	
- ADF Model	12/24VDC	• Available in PL-3 Connector or DryFit Connector
Amp Draw	280mA	• M42324A-KIT Retail Kit with Grommet & Pigtail
- ADV Model	340mA 12V/190mA 24V	• M42324-ADV 12/24VDC Auto Select Dual Voltage
Dimensions	4.3" Diam. x 1.6" D	• Patented Lightning Lens Optics
Mounting	Grommet Mount	• US Patent No. 8,009,364 and 8,717,679 B2
Connector	PL-3	• Polycarbonate Lens & Housing
- ADF Model	DryFit	• Retail Pack or Bulk Pack Available
Legal Heading	R	• 5 Year Warranty
DOT/SAE	J593	

4" ROUND BACK-UP — GROMMET 9 LED & SURFACE MOUNT 18 LED

5 Lightning



M42348 Back

M42321-A

PART NUMBER	DESCRIPTION
M42347	GROMMET MOUNT PL-3
M42348	GROMMET MOUNT DryFit
M42321-A	SURFACE MOUNT, BLUNT CUT WIRES

LEDs	9 (18 - M42321-A)	• 4" Round Back-Up
Voltage	12.8VDC	• Also Available in Bulk Pack (-X)
Amp Draw	210mA	• Patented Lightning Lens Optics
Dimensions	4.3" Diam. x 1.6" D	• US Patent No. 8,009,364
- M42321-A	5.5" Diam. x 0.75" D	• US Patent No. 8,717,679 B2
Mounting	Grommet	• Sealed Moisture Proof Electronics
- M42321-A	3 Hole Surface, 5"	• Available in Grommet or Surface Mount
Connector	PL-3, DryFit, or 3 Wire Blunt Cut	• Polycarbonate Lens & Housing
Legal Heading	R	• 5 Year Warranty
DOT/SAE	J593	

NEW

4" ROUND BACK-UP — GROMMET MOUNT

5 Lightning



PART NUMBER	DESCRIPTION
M42349	GROMMET MOUNT PL-3, 8 LED

LEDs	8	• 4" Round Back-Up
Voltage	12.8VDC	• Well suited for OE Builds and Fleet Applications
Amp Draw	170mA	
Dimensions	4.3" Diam. x 1.7" Depth	• 8 LED Economy Option
Mounting	Grommet	• Polycarbonate Lens & Housing
Connector	PL-3	• 5 Year Warranty
Legal Heading	R	
DOT/SAE	J593	

LED BACK-UP LIGHTS

4" ROUND FLANGE MOUNT BACK-UP 10 LED — BULK PACK



M42356-X

PART NUMBER	DESCRIPTION
M42354-X	FLANGE MOUNT PL-3
M42356-X	FLANGE MOUNT DryFit

LEDs	10	• Thin Low Profile Design
Voltage	12.8VDC	• Lightning Patented Lens
Amp Draw	200mA	• US Patent No. 8,009,364
Dimensions	5.6" Diam. x 0.7" Depth	• US Patent No. 8,717,679 B2
Mounting	3 Hole Flange	• Acrylic Lens/Polycarbonate Housing
Connector	PL-3 or DryFit	• Neoprene Gasket Included
Legal Heading	R	• 5 Year Warranty
DOT/SAE	J593	

SURFACE OR TAPE MOUNT 0.4" ULTRA THIN RECTANGULAR BACK-UP



Optional M42206-ADHESIVE Tape

PART NUMBER	DESCRIPTION
M42206	SURFACE MOUNT BACK-UP
M42206-ADHESIVE	OPTIONAL MOUNTING TAPE

LEDs	14	• Ultra Thin 0.4" Low Profile Design
Voltage	12.8VDC	• Also Available in Bulk Pack (-X)
Amp Draw	240mA	• Polycarbonate Lens & Housing
Dimensions	4.6" W x 2.5" H x 0.4" D	• Completely Sealed Electronics
Mounting	2 Hole Surface, 3-7/8" C to C or Tape Mount	• 2 Caps to Cover Screws
Connector	2 Wire 6" Leads	• 5 Year Warranty
Legal Heading	R	
DOT/SAE	J593	

RECTANGULAR SURFACE MOUNT BACK-UP



PART NUMBER	DESCRIPTION
M63318-A	RECTANGULAR BACK-UP
M63318-A-GSKT	RECTANGULAR BACK-UP WITH GASKET

LEDs	20	• 15" Surface Mount Back-Up
Voltage	12.8VDC	• Horizontal or Vertical Mount
Amp Draw	500mA	• Compact Thin Low Profile Design
Dimensions	15.4" L x 1.2" W x 0.7" D	• Sealed Moisture Proof Electronics
Mounting	Surface	• Polycarbonate Lens & Housing
Connector	2 Leads, Blunt Cut, 14"	• 10 Year Warranty
Legal Heading	R	
DOT/SAE	J593	

LED BACK-UP LIGHTS

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

6" OVAL BACK-UP SURFACE, GROMMET, OR TAPE MOUNT 14 LED



Optional M50146 Bezel



Optional M50607 Grommet

PART NUMBER	DESCRIPTION
M63350	WHITE BACK-UP
M63352-X	WHITE BACK-UP WITH PL-2 CONNECTOR – BULK PACK

LEDs	14	<ul style="list-style-type: none"> • Also Available in Bulk Pack (-X) • Polycarbonate Lens & Housing • Completely Sealed Electronics • Includes Caps to Cover Screws • Reinforced Riveted Mounting Holes • 5 Year Warranty
Voltage	12.8VDC	
Amp Draw	245mA	
Dimensions	6.5" W x 2.3" H x 0.5" D	
Mounting	2 Hole Surface, Grommet, or Tape	
Connector	Wire 6" Leads - Blunt Cut	
- M63352-X	2 Wire 6" Leads - PL-2	
Legal Heading	R	
DOT/SAE	J593	

6" OVAL BACK-UP – SURFACE AND FLANGE MOUNT 10 LED



M63320-ACH

M63320-A

M63323-A

PART NUMBER	DESCRIPTION
M63320-A	SURFACE MOUNT – BLACK HOUSING
M63320-ACH	SURFACE MOUNT – CHROME HOUSING
M63323-A	FLANGE MOUNT – BLACK HOUSING

LEDs	10	<ul style="list-style-type: none"> • DOT FMVSS108 Compliant for 1-Lamp or 2-Lamp Systems • Available in Black Housing or Chrome Housing • Polycarbonate Lens & Housing • 5 Year Warranty
Voltage	12.8VDC	
Amp Draw	270mA	
Dimensions	7.8" W x 3.5" H x 0.7" D	
Mounting	2 Hole Surface, 7-1/4" C to C	
- M63323-A	2 Hole Flange, 7-1/4" C to C	
Connector	2 Wires: 1 Blunt, 1 Ring, 13"	
Legal Heading	R	
DOT/SAE	J593	

6" OVAL BACK-UP – GROMMET MOUNT 18 LED



Lightning



M63347-ADF

PART NUMBER	DESCRIPTION
M63347-A	GROMMET MOUNT – PL-3
M63347-ADF	GROMMET MOUNT – DryFit CONNECTOR

LEDs	18	<ul style="list-style-type: none"> • DOT FMVSS108 Compliant for 1-Lamp or 2-Lamp Systems • Also Available in Bulk Pack (-X) • Patented Lightning Lens Optics • US Patent No. 8,009,364 • US Patent No. 8,717,679 B2 • Polycarbonate Lens & Housing • 5 Year Warranty
Voltage	12.8VDC	
Amp Draw	0.5A	
Dimensions	6.4" W x 2.0" H x 1.8" D	
Mounting	Grommet	
Connector	PL-3, or DryFit	
Legal Heading	R	
DOT/SAE	J593	

6" OVAL BACK-UP – GROMMET MOUNT 18 LED



Lightning



M63324-ADF

PART NUMBER	DESCRIPTION
M63324-A	GROMMET MOUNT – PL-3
M63324-ADF	GROMMET MOUNT – DryFit CONNECTOR

LEDs	18	<ul style="list-style-type: none"> • DOT FMVSS108 Compliant for 1-Lamp or 2-Lamp Systems • Also Available in Bulk Pack (-X) • Patented Lightning Lens Optics • US Patent No. 8,009,364 • US Patent No. 8,717,679 B2 • Polycarbonate Lens & Housing • 5 Year Warranty
Voltage	12.8VDC	
Amp Draw	0.5A	
Dimensions	6.4" W x 2.0" H x 1.8" D	
Mounting	Grommet	
Connector	PL-3 or DryFit	
Legal Heading	R	
DOT/SAE	J593	

LED BACK-UP LIGHTS

3" X 5" RECTANGULAR BACK-UP



PART NUMBER	DESCRIPTION
M42213-A	GROMMET MOUNT

LEDs	10	• Horizontal or Vertical Mount
Voltage	12.8VDC	• Grommet Mount
Amp Draw	170mA	(M49700 Sold Separately)
Dimensions	5.3" W x 3.4" H x 1.3" D	• Integrated PL-3 Connector
Mounting	Rectangular Grommet	• Acrylic Lens & Polycarbonate Housing
Connector	PL-3	• 5 Year Warranty
Legal Heading	R	
DOT/SAE	J593	

NEW

3" X 5" WHITE BACK-UP & RED TAIL GLOW EDGE



Edge Glows Red
With Tail Lights

PART NUMBER	DESCRIPTION
M42215	3" X 5" WHITE BACK-UP / RED TAIL WITH GLOW EDGE

LEDs	42 (12 White, 30 Red)	• 3" x 5" Rectangular Back-Up & Red Tail
Voltage	12.8VDC	• Red Glow Edge Illuminates in Tail Light
Amp Draw	Back-Up 0.2A, Tail 0.1A	• DOT Compliant in Vertical Mount
Dimensions	3.4" W x 5.3" H x 1.3" D	• Integrated PL-3 Connector
Mounting	Rectangular Grommet	• Polycarbonate Lens & Housing
Connector	Integrated PL-3	• 5 Year Warranty
Legal Heading	R, T2	
DOT/SAE	J593, J2040	

3" X 5" RECTANGULAR BACK-UP AND REFLECTOR



PART NUMBER	DESCRIPTION
M42214	GROMMET MOUNT BACK UP LIGHT AND REFLECTOR

LEDs	20	• Horizontal or Vertical Mount
Voltage	12.8VDC	• Combination Back-Up and Reflex Reflector
Amp Draw	0.5A	• Grommet Mount (M49700)
Dimensions	5.3" W x 3.4" H x 1.8" D	• Acrylic Lens & ABS Housing
Mounting	Rectangular Grommet	• 5 Year Warranty
Connector	PL-3	
Legal Heading	A R	
DOT/SAE	J593, J594	

M25100L LED LICENSE LIGHTS 2-STUD MOUNT



M25100L

PART NUMBER	DESCRIPTION
M25100L	LED LICENSE LIGHT 2-STUD
M25100L-X	LED LICENSE LIGHT 2-STUD – BULK PACK

LEDs	4
Lumens	50
Voltage	12.8VDC
Amp Draw	70mA
Dimensions	2.7" W x 1.6" H x 2.8" D
Mounting	2 #10 Studs, 1-7/8" Center to Center
Connector	2 Leads Blunt Cut, 4"
Legal Heading	L
DOT/SAE	J587

- DOT FMVSS108 Compliant LED License Light
- 2-Stud Mount
- 1-Lamp or 2-Lamp Systems
- Acrylic Lens and PVC Housing
- Retail Pack or Bulk Pack
- 5 Year Warranty

M25102L LED LICENSE LIGHTS AND LICENSE PLATE BRACKET



M25102BLK-X



M25102LCH-X

PART NUMBER	DESCRIPTION
M25102BLK-X	LED LICENSE LIGHT AND BRACKET, BLACK HOUSING
M25102LCH-X	LED LICENSE LIGHT AND BRACKET, CHROME HOUSING

LEDs	2
Lumens	45
Voltage	12.8VDC
Amp Draw	35mA
Dimensions	8.5" W x 2.9" H x 2.3" D
Mounting	2 Hole Surface 3.5" Center to Center
Connector	2 Leads Blunt Cut, 6"
Legal Heading	L
DOT/SAE	J587

- DOT FMVSS108 Compliant LED License Light
- LED License Light and License Plate Bracket Assembly
- 1-Lamp System
- Includes License Plate Mounting Kit
- Individually Bagged
- Bulk Pack Only
- 5 Year Warranty



LED LICENSE LIGHTS

M25201L ROUND LED LICENSE LIGHT



PART NUMBER DESCRIPTION	
M25201L	1" ROUND X 1.75", STEEL BRACKET
M25201L-X	1" ROUND X 1.75", STEEL BRACKET – BULK PACK
LEDs	4 • DOT FMVSS108 Compliant LED License Light
Lumens	12 • 2-Lamp Systems
Voltage	12.8VDC • Polycarbonate Lens and Aluminum Housing
Amp Draw	40mA • Retail Pack or Bulk Pack
Dimensions	1.5" Diam. x 1.75" Deep • 5 Year Warranty
Mounting	1.25" Hole
Connector	2 Leads Blunt Cut, 7"
Legal Heading	L
DOT/SAE	SAE J587

M25200L / M25202L-X LED LICENSE LIGHT WITH BEZEL



PART NUMBER DESCRIPTION	
M25200L	1.7" X 1" WITH BEZEL, BLUNT CUT WIRES
M25200L-X	1.7" X 1" WITH BEZEL, BLUNT CUT – BULK PACK
M25202L-X	1.7" X 1" WITH BEZEL, PL-10 CONNECTOR – BULK PACK
LEDs	4 • DOT FMVSS108 Compliant LED License Light
Lumens	70 • 1-Lamp or 2-Lamp Systems
Voltage	12.8VDC • Acrylic Lens and Aluminum Housing
Amp Draw	90mA • Retail Pack or Bulk Pack
Dimensions	• 5 Year Warranty
- Light only	1.7" W x 0.75" H x 0.96" D
- With Bezel	2.5" W x 0.9" H x 1.2" D
Mounting	2 Hole Surface 2" Center to Center
Connector	2 Leads Blunt Cut, 12"
- M25202L	2 Female PL-10, 12"
Legal Heading	L
DOT/SAE	SAE J587

M25210L-X ROUND 2" TALL LED LICENSE LIGHT



PART NUMBER DESCRIPTION	
M25210L-X	1.4" ROUND X 2.0" STEEL BRACKET – BULK PACK
LEDs	2 • DOT FMVSS108 Compliant LED License Light
Lumens	55 • 1-Lamp or 2-Lamp Systems
Voltage	12.8VDC • Bulk Pack Only
Amp Draw	100mA • Polycarbonate Lens
Dimensions	2.75" W x 1.5" H x 2.0" D • Steel Base with Chrome-Plated Steel Housing
Mounting	2 Hole Surface 1.95" Center to Center
Connector	2 Leads Blunt Cut, 5.5"
Legal Heading	L
DOT/SAE	J587 • 5 Year Warranty

LED LICENSE LIGHTS

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

M25300-SERIES LED LICENSE LIGHT 1" X 2-1/2" RECTANGLE



M25301L
with .180 Bullets



M25302L
with Female PL-10



M50250
Sold Separately



Shown with
M25302L
Sold Separately

PART NUMBER	DESCRIPTION
M25301L	2-1/2" X 1" RECTANGULAR WITH .180 MALE BULLETS
M25301L-X	2-1/2" X 1" RECTANGULAR WITH .180 MALE BULLETS – BULK PACK
M25302L	2-1/2" X 1" RECTANGULAR WITH FEMALE PL-10
M25302L-X	2-1/2" X 1" RECTANGULAR WITH FEMALE PL-10 – BULK PACK
M50250	GREY MOUNTING BRACKET FOR M25301L / M25302L

LEDs	4	• DOT FMVSS108 Compliant
Lumens	50	LED License Light
Voltage	12.8VDC	• Or Courtesy Light
Amp Draw	60mA	• 1-Lamp System
Dimensions	2.5" W x 1.2" H x 1.1" D	—Top or Side Mount
- M50250 Bracket:	3.4" W x 2.6" H x 2.2" D	• Lights and Brackets Sold Separately
Mounting		• Retail or Bulk Pack
- M50250 Bracket:	2 Hole Surface 2.0" C to C	• 5 Year Warranty
- Or Base Mount:	M20325, M20326, M20327, M20328	
Connector		
- M25301L	2 Male .180 Bullets	
- M25302L	2 Female PL-10	
Legal Heading	L	
DOT/SAE	SAE J587	

M25930L LED LICENSE LIGHT 3.4" GROMMET MOUNT



8" Lead .180 Bullet Terminals

PART NUMBER	DESCRIPTION
M25930L	3/4" GROMMET WITH HOOD

LED	1	• DOT FMVSS108 Compliant LED
Lumens	40	License Light
Voltage	12.8VDC	• For 2-Lamp Systems
Amp Draw	50mA	• Fits Standard 3/4" Hole
Dimensions	0.75" Diam. x 1" H	• Hooded Grommet Included
Mounting	Grommet – 3/4" Hole Cutout	• Optional Courtesy Light, 40 Lumens
Connector	2 Leads .180 Bullets, 8"	• Polycarbonate Lens & Housing
Legal Heading	DOT SAE (2) L	• 5 Year Warranty
DOT/SAE	J587	

M25220L LED LICENSE LIGHT POLISHED STAINLESS STEEL HOUSING




PART NUMBER	DESCRIPTION
M25220L	POLISHED STAINLESS STEEL HOUSING

LEDs	3	• DOT FMVSS108 Compliant LED
Lumens	40	License Light
Voltage	12.8VDC	• For 2-Lamp Systems
Amp Draw	40mA	• Polished Stainless Housing
Dimensions	3.4" W x 1.36" H x 0.91" D	• Optional Step Well Light 40 Lumens
Mounting	2 Hole Surface 2.6" C to C	• Polycarbonate Lens & PC and Aluminum Housing
Connector	1 .156 Bullet & 1 Ring, 8"	• 5 Year Warranty
Legal Heading	DOT SAE (2) L	
DOT/SAE	J587	

7" BUS LIGHTS

7" RED & AMBER FLASHING WARNING LIGHTS

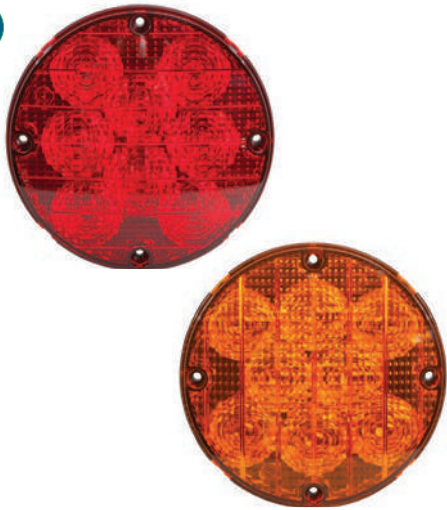

PART NUMBER	DESCRIPTION
M90070R	RED FLASHING WARNING
M90070Y	AMBER FLASHING WARNING

LEDs	8	• 7" Red/Amber Warning
Voltage	12.8VDC	• Two Flash Patterns Slow/Fast
Amp Draw	1.5A Red / 2.0A Amber	• Polycarbonate Lens & Housing
Dimensions	7.2" Diam. x 1.4" Depth	• Mounting Gasket Included
Mounting	4 Hole Surface	• 5 Year Warranty
Connector	3 Wire 11" Leads	
Legal Heading	SAE DOT W2	
DOT/SAE	Red: J887, CA13 Amber: J887	

7" BACK-UP



PART NUMBER	DESCRIPTION
M90450	7" WHITE BACK-UP

LEDs	20	• 7" White Back-Up Light
Voltage	12.8VDC	• 4 Hole Surface Mount
Amp Draw	250mA	• Mounting Gasket Included
Dimensions	7.0" Diam. x 1.2" Depth	• Sealed Moisture Proof Electronics
Mounting	4 Hole Surface	• Polycarbonate Lens & Housing
Connector	2 Wire Leads	• 5 Year Warranty
Legal Heading	R	
DOT/SAE	J593	

7" STOP/TURN/TAIL & 7" FRONT/REAR/TURN



PART NUMBER	DESCRIPTION
M90061R	RED STT
M90081Y	AMBER PFT/PRT

LEDs	17	• 7" Stop/Turn/Tail (Red)
Voltage	12.8VDC	• 7" Front/Rear Turn (Amber)
Amp Draw	120mA Red / 280mA Amber	• Reflector Lens
Dimensions	7.0" Diam. x 1.2" Depth	• 4 Hole Surface Mount
Mounting	4 Hole Surface	• Mounting Gasket Included
Connector	3 Wire Leads	• Moisture Proof Sealed Electronics
Legal Heading	A I6 S2 T2 (Red) A I6 P (Amber)	• Polycarbonate Lens & Housing
DOT/SAE	Red: J594, J2040, J2261 Amber: J594, J2261	• 5 Year Warranty

AMBER LED TURN SIGNALS

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

4" ROUND AMBER PARK/FRONT/REAR TURN — GROMMET MOUNT



M42339Y



M42339YCL



M42339YDF

PART NUMBER	DESCRIPTION
M42339Y	4" AMBER
M42339YCL	4" AMBER CLEAR LENS
M42339YDF	4" AMBER, DryFit

LEDs	9	• 4" Round Amber
Voltage	12.8VDC	• Park/Front Turn/Rear Turn
Amp Draw	160mA / 20mA	• Available in Amber (Y) or Amber Clear Lens (YCL) with Integrated PL-3 Connector
Dimensions	4.3" Diam x 1.8" Depth	• Available in Amber with Integrated DryFit Connector (YDF)
Mounting	Grommet	• Patented Lightning Optics
Connector		• US Patent No. 8,009,364
- M42339Y	PL-3	• US Patent No. 8,717,679 B2
- M42339YDF	DryFit	• Polycarbonate Lens & Housing
Legal Heading	I6 P	• 5 Year Warranty
DOT/SAE	J222, J2261	


4" ROUND AMBER PARK/FRONT/REAR TURN — SURFACE MOUNT



PART NUMBER	DESCRIPTION
M42321Y	4" AMBER

LEDs	9	• 4" Round Amber
Voltage	12.8VDC	• Park/Front Turn/Rear Turn
Amp Draw	130mA / 15mA	• Patented Lightning Lens Optics
Dimensions	5.5" Diam. x 0.9" D	• US Patent No. 8,009,364
Mounting	3 Hole, 5" Bolt Circle	• US Patent No. 8,717,679 B2
Connector	3 Leads Blunt Cut, 12"	• Polycarbonate Lens & Housing
Legal Heading	I6 P	• 5 Year Warranty
DOT/SAE	J222, J2261	

4" ROUND FLANGE MOUNT AMBER PARK/REFLEX/REAR TURN




PART NUMBER	DESCRIPTION
M42354Y-X	AMBER FLANGE MOUNT

LEDs	7	• 4" Round Amber Flange Mount
Voltage	12.8VDC	• Park/Reflex/Rear Turn
Amp Draw	160mA	• Thin Low Profile Design
Dimensions	5.6" Diam. x 0.7" Depth	• Lightning Patented Lens
Mounting	3 Hole Flange	• US Patent No. 8,009,364
Connector	PL-3	• US Patent No. 8,717,679 B2
Legal Heading	A I6 P	• Acrylic Lens/Polycarbonate Housing
DOT/SAE	J222, J594, J2261	• Neoprene Gasket Included
		• 5 Year Warranty

AMBER LED TURN SIGNALS

NEW

6" OVAL AMBER PARK/FRONT/REAR TURN — 14 LED

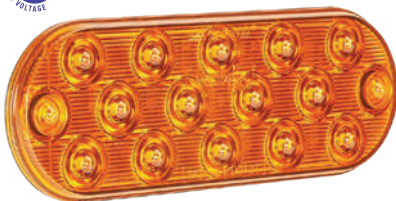

NEW
NEW



Side Profile

PART NUMBER	DESCRIPTION
M63350Y-A	AMBER PARK/FRONT/REAR TURN THIN PROFILE
M63350Y-AX	AMBER PARK/FRONT/REAR TURN THIN PROFILE – BULK PACK
M63351Y-X	AMBER WITH .180 BULLETS – SURFACE OR GROMMET MOUNT

Voltage	12.8VDC	• 6" Oval Amber Park / Front Turn / Rear Turn
Amp Draw	0.6A Turn / 30mA Park	• DOT Compliant I6 and I3 Front Turn
Dimensions	6.5" W x 2.3" H x 0.5" D	• Available in Retail Pack or Bulk Pack (-X)
Mounting	2 Hole Surface, 5.5" C to C, or	• Surface Mount – Mounting Screws & Caps Included
Connector		• Optional M50608 Grommet Mount
- M63350Y-AX	3 Leads, Blunt Cut, 18"	• Vertical or Horizontal Mount
- M63351-X	3 Leads, .180 Bullets, 6"	• Polycarbonate Lens & Housing
LEDs	14	• 5 Year Warranty
Legal Heading	I3, I6, P	
DOT/SAE	J222, J2261	

6" OVAL AMBER PARK/FRONT/REAR TURN — 9 LED




M63339Y



PART NUMBER	DESCRIPTION
M63339Y	AMBER - GROMMET MOUNT
M63339YDF	AMBER - GROMMET MOUNT – DryFit
M63339YCL	AMBER CLEAR LENS – GROMMET MOUNT
M63339YCLDF	AMBER CLEAR LENS – GROMMET MOUNT – DryFit

LEDs	9	• 6" Oval Amber
Voltage	12.8VDC	• Park/Front Turn/Rear Turn
Amp Draw	180mA / 10mA	• Patented Lightning Optics
Dimensions	6.4" W x 2.2" H x 1.7" D	• US Patent No. 8,009,364
Mounting	Grommet	• US Patent No. 8,717,679 B2
Connector	PL-3 or DryFit (DF Models)	• Available in PL-3 or DryFit
Legal Heading	I6 P	• Polycarbonate Lens & Housing
DOT/SAE	J222, J2261	• 5 Year Warranty

6" OVAL AMBER PARK/FRONT/REAR TURN — 60 LED



PART NUMBER	DESCRIPTION
M63100Y	AMBER
M63100YDF	AMBER – DryFit

LEDs	60	• 6" Oval Amber
Voltage	12.8VDC	• Park/Front Turn/Rear Turn
Amp Draw	0.7 A	• Available in PL-3 or DryFit
Dimensions	6.4" W x 2.2" H x 1.7" D	• Polycarbonate Lens & Housing
Mounting	Oval Grommet	• 5 Year Warranty
Connector	PL-3 or DryFit	
Legal Heading	I6 P P2 P3	
DOT/SAE	J592, J222, J2042, J2261	

OVAL AMBER PARK/FRONT/REAR TURN SURFACE MOUNT — 15 LED



PART NUMBER	DESCRIPTION
M63320Y-A	AMBER WITH PL-3 – SURFACE MOUNT

LEDs	10	• New A-Series Design, Sleek Look
Voltage	12.8VDC	• 6" Oval Surface Mount
Amp Draw	250mA	• Park/Front Turn/Rear Turn
Dimensions	7.8" W x 3.5" H x 0.7" D	• Horizontal or Vertical Mount
Mounting	2 Surface, 7-1/4" C to C	• Polycarbonate Lens & Housing
Connector	3 Leads, PL-3, 13"	• Low Profile Design
Legal Heading	I6 P	• 5 Year Warranty
DOT/SAE	J222, J2261	

AMBER LED TURN SIGNALS

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

3" X 5" RECTANGULAR PARK/FRONT/REAR TURN



M42213Y-A



M42213YCL-A

PART NUMBER	DESCRIPTION
M42213Y-A	AMBER
M42213YCL-A	AMBER CLEAR LENS

LEDs	10	• 5" Rectangular
Voltage	12.8VDC	• Park/Front Turn/Rear Turn
Amp Draw	320mA / 40mA	• Horizontal or Vertical Mount
Dimensions	5.3" W x 3.4" H x 1.5" D	• Acrylic Lens
Mounting	Rectangle Grommet	• Polycarbonate Housing
Connector	PL-3	• 5 Year Warranty
Legal Heading	I6 P P2	
DOT/SAE	J222, J592, J2261	

SURFACE MOUNT 0.4" ULTRA THIN AMBER PARK/REAR TURN



Optional
M42206-Adhesive Tape

PART NUMBER	DESCRIPTION
M42206Y	AMBER
M42206-ADHESIVE	OPTIONAL MOUNTING TAPE

LEDs	14	• Park/Rear Turn
Voltage	12.8VDC	• Also Available in Bulk Pack (-X)
Amp Draw	290mA	• Ultra Thin .04" Low Profile Design
Dimensions	4.6" W x 2.5" H x 0.4" D	• Sealed Moisture Proof Electronics
Mounting	2 Hole 3-7/8" C to C, or Tape	• Polycarbonate Lens & Housing
Connector	3 Leads, Blunt Cut, 7"	• 5 Year Warranty
Legal Heading	I P	
DOT/SAE	J222, J588	

SURFACE MOUNT RECTANGULAR PARK/REAR TURN



PART NUMBER	DESCRIPTION
M63318Y-A	AMBER
M63318YCL-A	AMBER CLEAR LENS

LEDs	10	• Park/Rear Turn
Voltage	12.8VDC	• Horizontal & Vertical 2 Hole Mount
Amp Draw	300mA	• Compact Thin Low Profile Design
Dimensions	15.4" L x 1.2" W x 0.7" D	• Sealed Moisture Proof Electronics
Mounting	Surface Vertical & Horizontal	• Polycarbonate Lens & Housing
Connector	3 Leads Blunt Cut, 14"	• 10 Year Warranty
Legal Heading	I P	
DOT/SAE	J222, J588	

LED DOUBLE FACE PEDESTAL LIGHTS

SQUARE CHROME DOUBLE FACE PEDESTAL



M42360R/Y-A



M42362R/Y-A



M42363RYCL-A



M42364Y/Y

PART NUMBER	DESCRIPTION
M42360R/Y-A	SINGLE POST LEFT HAND
M42361R/Y-A	SINGLE POST RIGHT HAND
M42362R/Y-A	DOUBLE POST LEFT HAND
M42363R/Y-A	DOUBLE POST RIGHT HAND
M42362RYCL-A	DOUBLE POST LEFT HAND CLEAR LENS
M42363RYCL-A	DOUBLE POST RIGHT HAND CLEAR LENS
M42364Y/Y	DOUBLE POST AMBER/AMBER

LEDs	13 Red / 14 Amber 27 Amber Y/Y
Voltage	12.8VDC
Amp Draw	0.4A
Dimensions	4.5" W x 4.5" H x 1.8" D
Mounting	Post
Connector	3 Leads Blunt Cut, 7"
Legal Heading	I6P, P3, I6 S2 T2 (R/Y) I6P, P2, P3 (Y/Y)
DOT/SAE	R/Y: J222, J2040, J2042, J2261 Y/Y: J592, J2042, J2261

- Square Chrome Double Face Pedestal
- Patented Lightning Optics
- US Patent No. 8,009,364
- US Patent No. 8,717,679 B2
- Polycarbonate Front & Rear Lens
- Double Insulated Waterproof Modules
- Epoxy Sealed Electronics
- P2 P3 Side Marker
- Available Single or Double Post
- 5 Year Warranty

ROUND DOUBLE FACE PEDESTAL



PART NUMBER	DESCRIPTION
M42341R/Y	RED/AMBER
M42341RYCL	RED/AMBER CLEAR LENS
M42341Y/Y	AMBER/AMBER

LEDs	15 Red / 15 Amber 15 Amber / 15 Amber
Voltage	12.8VDC
Amp Draw	0.4A
Dimensions	4.3" Diam. x 2.0" Depth
Mounting	Post
Connector	3 Leads Blunt Cut, 5"
Legal Heading	I6 P, I6 S2 T2 (Y/Y I6, I6 P)
DOT/SAE	R/Y: J222, J2040, J2261 Y/Y: J222, J2261

- Round Chrome Double Face Pedestal
- Red STT or Amber PFRT
- Patented Lightning Optics
- US Patent No. 8,009,364
- US Patent No. 8,717,679 B2
- Polycarbonate Front & Rear Lens
- Single Post
- Sealed Moisture Proof Electronics
- 5 Year Warranty

AMBER LED TURN SIGNALS

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES


6" OVAL AMBER SIDE TURN/SIDE MARKER



PART NUMBER	DESCRIPTION
M63121Y	AMBER SIDE TURN WITH PL-3 CONNECTOR
M63121YDF	AMBER SIDE TURN WITH DryFit CONNECTOR

LEDs	28	• 6" Oval Amber
Voltage	12.8VDC	• Side Turn / Side Marker / Reflex
Amp Draw	540mA / 25mA	• Sealed Moisture Proof Electronics
Dimensions	6.5" W x 2.2" H x 2.8" D	• Acrylic Lens
Mounting	Grommet	• Polycarbonate Housing
Connector	PL-3 or DryFit	• 5 Year Warranty
Legal Heading	A E P2 P3	
DOT/SAE	J592, J594, J2039, J2042	

FREIGHTLINER® REPLACEMENT SIDE TURN/SIDE MARKER LIGHT

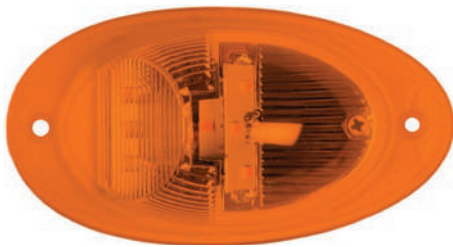

M50916

PART NUMBER	DESCRIPTION
M63123Y	AMBER
M50916	OPTIONAL 3-PIN DELPHI CONNECTOR

LEDs	7	• Freightliner replacement
Voltage	12.8VDC	• Plugs into OEM harness
Amp Draw	420mA	• Low LED Amp Draw
Dimensions	5.1" W x 2.7" H x 2.9" D	• Polycarbonate Lens & Housing
Mounting	Two Hole	• 5 Year Warranty
Connector	3-Pin Delphi GT 150	
Legal Heading	E P2 P3	
DOT/SAE	J592, J2039, J2042	

* FREIGHTLINER IS A REGISTERED TRADEMARK OF DAIMLER TRUCKS N.A.

PETERBILT® REPLACEMENT OVAL AMBER SIDE TURN/SIDE MARKER



Lightning



PART NUMBER	DESCRIPTION
M63122Y	AMBER

LEDs	9	• Peterbilt Replacement
Voltage	12.8VDC	• Patented Lightning Lens Optics
Amp Draw	100mA	• US Patent No. 8,009,364
Dimensions	4.4" W x 2.1" H x 1.4" D	• US Patent No. 8,717,679 B2
Mounting	Two Stud Mount	• Polycarbonate Lens & Housing
Connector	3 Leads Blunt Cut, 11"	• Stainless Steel Bolts & Nuts
Legal Heading	E2 P2 P3	• 5 Year Warranty
DOT/SAE	J592, J914, J2042	

* PETERBILT IS A REGISTERED TRADEMARK OF PACCAR

LED CLEARANCE MARKER LIGHTS



DUAL COLOR / DUAL FUNCTION

3/4" AND 1-1/4"

2" AND 2-1/2"

OE-STYLE

ID BARS

LED CLEARANCE MARKER



DUAL FUNCTION CLEARANCE / MARKER AND WHITE GROUND LIGHT

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

M23025-SERIES CLEARANCE MARKER — WITH GROUND LIGHT



PART NUMBER	DESCRIPTION
M23025RW-DC	RED CM AND WHITE GROUND LIGHT
M23025RW-DCDV	RED CM AND WHITE GROUND LIGHT – 12/24VDC
M23025YW-DC	AMBER CM AND WHITE GROUND LIGHT
M23025YW-DCDV	AMBER CM AND WHITE GROUND LIGHT – 12/24VDC
M23025RB-DC	RED CM AND BLUE AUX. GROUND LIGHT
M23025YB-DC	AMBER CM AND BLUE AUX. GROUND LIGHT

LEDs	16 (10 + 6 White or Blue)	• DOT FMVSS108 Compliant LED Clearance Marker
Voltage	12.8VDC or 12/24VDC (-DV Models)	• And Secondary Aux Ground Light
Amp Draw		• 70 Lumen White Light Directed Downward
- DC	C/M: 230mA Aux: 70mA	• Available in 12-Volt Only Models or 12/24VDC Dual Voltage (-DCDV)
- DCDV	Red: 230mA 12V / 110mA 24V	• Same Mounting Footprint as M23015R/Y
	Amber: 200mA 12V / 100mA	• Polycarbonate Lens & Housing
Dimensions	4.0" W x 2.0" H x 1.0" D	• 5 Year Warranty
Mounting	2 Hole Surface, 3" C to C	
Connector	3 Leads, 2 .180 Bullet, 1 Ring, 5"	
Legal Heading	P2 P3 PC2	
DOT/SAE	J592, J2042	

Same size and design as our popular M23015-Series but with White Ground Light added

M17300YWCL-DC DUAL-COLOR



PART NUMBER	DESCRIPTION
M17300RWCL-DC	RED CLEAR LENS CM AND WHITE GROUND LIGHT
M17300YWCL-DC	AMBER CLEAR LENS CM AND WHITE GROUND LIGHT

LEDs	12 (6 Amber, 6 White, or 6 Red, 6 White)	• OE-Style Clearance Marker with Ground Illumination
Lumens	85	• White LEDs 85 Lumens
Voltage	12.8VDC	• White LEDs directed downward toward the side of the vehicle for improved driver safety
Amp Draw	CM: 80mA, Ground Light: 110mA	• Polycarbonate Lens, PC and ABS Housing
Dimensions	5.1" W x 1.5" H x 1.1" D	• Same Mounting Footprint as M20332-Series
Mounting	2 Hole Surface, 3-15/16" Center to Center	• Dedicated (discrete) wire for ground illumination allows installer to put it on a dedicated switch
Connector	3 Leads: (1) Ring, (2) .180 bullets, 7"	• 5 Year Warranty
Legal Heading	P2 P3	
DOT/SAE	J592, J2042	

LED CLEARANCE MARKER

1-1/4" CLEARANCE MARKER & SAE J595 FLASHING WARNING, 2 LIGHTS IN 1



Available in RED/AMBER



AMBER



RED



AMBER



AMBER/WHITE



RED/WHITE



Shown with Optional M50118 Stainless Steel Bezel



1-1/4" Light Head Fits 3/4" Hole

PART NUMBER	DESCRIPTION
M09450RYCL-DC	1-1/4" ROUND CM RED/AMBER AND FLASHING WARNING
M09450RWCL-DC	1-1/4" ROUND CM RED-WHITE AND FLASHING WARNING
M09450YCL-DC	1-1/4" ROUND CM AMBER AND FLASHING WARNING
M09450YWCL-DC	1-1/4" ROUND CM AMBER CLEAR LENS AND FLASHING WARNING
M50118	OPTIONAL 1-1/4" STAINLESS STEEL GROMMET COVER

LEDs	4 (YCL-DC: 4 Amber) (YWCL-DC: 2 Amber, 2 White) (RWCL-DC: 2 Red, 2 White) (RYCL-DC: 2 Red, 2 Amber)	<ul style="list-style-type: none"> • DOT FMVSS 108 Compliant - Red / Amber P2 P3 (in Red) - Red / White P2 - Amber and Amber/White P2 P3 PC2 • And Flashing Warning Device • SAE J595 Class 2 and Class 3 • Available in 4 models (Red / Amber, Red White, Amber, Amber / White) • Built-in Flasher - 28 Patterns • Polycarbonate Lens and Housing • 5 Year Warranty
Voltage	12.8VDC	
Amp Draw	Max 140mA	
Dimensions		
- Light Only	1.25" Diam. x 0.6" H (1.2" OAL)	
- Grommet	1.75" Diam. (Grommet)	
Mounting	Grommet fits 3/4" Hole	
Connector	4 Jacketed Leads .180 Bullets, 7"	
Legal Heading		
- Red / Amber	P2 P3, W-2	
- Amber Models	P2 P3 PC2, W-2	
- Red / White	P2, W-2	
SAE		
- Red / Amber	J592, J2042, J595 Class 2	
- Amber Models	J592, J2042, J595 Class 2	
- Red / White	J592, J595 Class 2	

3/4" MINI COMBINATION CLEARANCE MARKER — BULK PACK ONLY



Lightning



Optional M50112 BEZEL

PART NUMBER	DESCRIPTION
M09330R-X	RED BULLET CONNECTOR – BULK PACK
M09330Y-X	AMBER BULLET CONNECTOR – BULK PACK
M09330Y-XBC	AMBER BLUNT CUT WIRE – BULK PACK
M09330R-XBC	RED BLUNT CUT WIRE – BULK PACK
M50112	STAINLESS STEEL BEZEL
M50125	OPTIONAL WIDE CHANNEL GROMMET

LEDs	1	• Bulk Pack Only
Voltage	12.8VDC	• Polycarbonate Lens/Housing
Amp Draw	60mA	• Grommet Included
Dimensions	0.75" Diam. x 1" D	• Lightning Lens Optics
Mounting	3/4" Hole	• US Patent Number 8,009,364
Connector	2 Leads, .180 Bullets or Blunt Cut, 7"	• US Patent No. 8,717,679 B2
Legal Heading	P2 P3 PC2	• Optional M50112 Stainless Bezel
DOT/SAE	J592, J2042	• 5 Year Warranty

ADDITIONAL COLORS - SEE PG. 44

LED CLEARANCE MARKER

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP /TURN /BACK-UP

CLEARANCE MARKER

ACCESSORIES

3/4" MINI COMBINATION CLEARANCE MARKERS



M09300R



M09300Y



M09300RCL



M09300YCL



M09300R-DV Dual Voltage



Optional M50112 BEZEL



PART NUMBER	DESCRIPTION
M09300R	RED
M09300R-X	RED – BULK PACK
M09300R-XBC	RED, BLUNT CUT – BULK PACK
M09300RCL	RED CLEAR LENS
M09300Y	AMBER
M09300Y-X	AMBER – BULK PACK
M09300Y-XBC	AMBER, BLUNT CUT – BULK PACK
M09300YCL	AMBER CLEAR LENS
M09300R-DV	RED – 12/24VDC DUAL VOLTAGE
M09300Y-DV	AMBER – 12/24VDC DUAL VOLTAGE
M50112	STAINLESS STEEL BEZEL
M50125	OPTIONAL WIDE CHANNEL GROMMET

LEDs	3	• Available in Colored or Clear Lens
Voltage	12.8VDC	• Also Available in Bulk Pack (-X)
Amp Draw	R: 60mA, RCL: 50mA, Y/YCL: 30mA	• Available in 12/24VDC Dual Voltage
- DV Models	30mA 12V / 30mA 24V	• Grommet Included
Dimensions	3/4" Diam. x 1" D	• Polycarbonate Lens/Housing
Mounting	Grommet - 3/4" Hole Cutout	• Optional M50112 Stainless Bezel
Connector	2 Jacketed Leads, .180 Bullets, 7"	• 5 Year Warranty
- XBC Models	2 Jacketed Leads, Blunt Cut, 7"	
Legal Heading	P2 P3 PC2	
DOT/SAE	J592, J2042	

ADDITIONAL COLORS - SEE PG. 44

3/4" CLEARANCE MARKER — DUAL COLOR — WITH AUX. LIGHT



AMBER/RED



PART NUMBER	DESCRIPTION
M09340YR-DC	3/4" ROUND CM AMBER WITH RED
M09340RW-DC	3/4" ROUND CM RED WITH WHITE AUX
M09340YW-DC	3/4" ROUND CM AMBER WITH WHITE AUX
M09340RBL-DC	3/4" ROUND CM RED WITH BLUE AUX
M09340YBL-DC	3/4" ROUND CM AMBER WITH BLUE AUX
M09340RG-DC	3/4" ROUND CM RED WITH GREEN AUX
M09340YG-DC	3/4" ROUND CM AMBER WITH GREEN AUX
M09340RP-DC	3/4" ROUND CM RED WITH PURPLE AUX
M09340YP-DC	3/4" ROUND CM AMBER WITH PURPLE AUX

LEDs	4 (2 of each color)	• DOT FMVSS108 Compliant LED C/M
Voltage	12.8VDC	• AND Secondary Aux Light available in White, Blue, Green, or Purple
Amp Draw	30mA	• Available in 9 Color Combinations
Dimensions	0.75" Diam. x 1" H	• Polycarbonate Lens
Mounting	3/4" Mounting Hole	• Optional Stainless Steel Bezel Included
Connector	3 Leads .180 Bullets, 8"	• 5 Year Warranty
Legal Heading	P2 P3	
DOT/SAE	J592, J2042	



RED/WHITE



RED/BLUE



RED/GREEN



RED/PURPLE



AMBER/WHITE



AMBER/BLUE



AMBER/GREEN



AMBER/PURPLE

LED CLEARANCE MARKER

1.25" MINI GROMMET OR TAPE MOUNT COMBINATION CLEARANCE MARKERS



Optional
M50118 Bezel

Optional
3M Tape Mount



M09410Y Side



M09411Y-X Side

PART NUMBER	DESCRIPTION
M09410R	RED
M09410R-X	RED – BULK PACK
M09410Y	AMBER
M09410Y-X	AMBER – BULK PACK
M09411R-X	RED WITH WIDE CHANNEL GROMMET – BULK PACK
M09411Y-X	AMBER WITH WIDE CHANNEL GROMMET – BULK PACK
M50118	STAINLESS STEEL BEZEL
M50132	BLACK GROMMET

LEDs	6	• Also Available in Bulk Pack (-X)
Voltage	12.8VDC	• Patented Lightning Lens Optics
Amp Draw	80mA	• US Patent No. 8,009,364
Dimensions	1-1/4" Diam.	• US Patent No. 8,717,679 B2
Mounting	Grommet 3/4" Hole or Tape Mount	• Polycarbonate Lens & Housing
Connector	2 Jacketed Leads, .180 Bullets, 7"	• Grommet and Tape Mount Included
Legal Heading	P2 P3 PC2	• 5 Year Warranty
DOT/SAE	J592, J2042	

ADDITIONAL COLORS - SEE PG. 45

1.25" MINI COMBINATION CLEARANCE MARKERS



M09400RCL

M09400YCL



M09400R Side



Optional
M50118 Bezel

PART NUMBER	DESCRIPTION
M09400R	RED
M09400R-X	RED – BULK PACK
M09400RCL	RED CLEAR LENS
M09400Y	AMBER
M09400Y-X	AMBER – BULK PACK
M09400Y-XBC	AMBER, BLUNT CUT – BULK PACK
M09400YCL	AMBER CLEAR LENS
M50118	STAINLESS STEEL BEZEL
M50132	BLACK GROMMET

LEDs	6	• Available in Retail or -X Bulk Pack
Voltage	12.8VDC	• Space Saving Design
Amp Draw	Max 120mA	• Patented Lightning Lens Optics
Dimensions	1-1/4" Diam.	• US Patent No. 8,009,364
Mounting	Grommet – 1-3/8" Hole Cutout	• US Patent No. 8,717,679 B2
Connector	2 Jacketed Leads, .180 Bullets, 7"	• Polycarbonate Lens/Housing
Legal Heading	P2 P3 PC2	• Grommet Included
DOT/SAE	J592, J2042	• Sealed Moisture Proof Electronics
		• Optional Stainless Steel Bezel
		• 5 Year Warranty

ADDITIONAL COLORS - SEE PG. 45

LED CLEARANCE MARKER

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP /TURN /BACK-UP

CLEARANCE MARKER

ACCESSORIES

NEW

2" ROUND CLEARANCE MARKER

10 YEAR WARRANTY



RCL & YCL Clear Lens

ABS Light

NEW

NEW

12/24 VOLTAGE



M09100R-KIT with Grommet & Pigtail

PART NUMBER	DESCRIPTION
M09100R	RED
M09100RCL	RED CLEAR LENS
M09100R-KIT	RED KIT WITH M50300-B & M50950
M09100Y	AMBER
M09100YCL	AMBER CLEAR LENS
M09100Y-KIT	AMBER KIT WITH M50300-B & M50950
M09100ABS	2" AMBER ABS
M09100R-DV	RED - 12/24VDC DUAL VOLTAGE
M09100Y-DV	AMBER - 12/24VDC DUAL VOLTAGE

LEDs	9	• 2" Round Clearance Marker
Voltage	12.8VDC (12/24 - DV Models)	• Available in Colored or Clear Lens
Amp Draw	100mA	• Available in 12/24VDC Dual Voltage
- DV Models	100mA 12V / 50mA 24V	• Also Available in Retail KIT with Grommet & Pigtail
Dimensions	2.0" Diam. x 0.7" Depth	• Polycarbonate Lens & Housing
Mounting	Grommet	• Plated Brass Connector
Connector	PL-10	• 10 Year Warranty
Legal Heading	P2 P3 & "ABS"	
DOT/SAE	J592, J2042	

2" ROUND CLEARANCE MARKER

5 YEAR WARRANTY



RCL & YCL Clear Lens

PART NUMBER	DESCRIPTION
M34260R	RED
M34260Y	AMBER
M34260RCL	RED CLEAR LENS
M34260YCL	AMBER CLEAR LENS

LEDs	6	• 2" Round Clearance Marker
Voltage	12.8VDC	• Also Available in Bulk Pack (-X)
Amp Draw	40mA	• Sealed Moisture Proof Electronics
Dimensions	2.0" Diam. x 0.8" Depth	• Polycarbonate Lens & Housing
Mounting	Grommet	• Plated Brass Connector
Connector	PL-10	• 5 Year Warranty
Legal Heading	P2 P3	
DOT/SAE	J592, J2042	

2" BEEHIVE CLEARANCE MARKER

10 YEAR WARRANTY



PART NUMBER	DESCRIPTION
M09105R	RED
M09105Y	AMBER

LEDs	9	• 2" Beehive Clearance Marker
Voltage	12.8VDC	• Circular LED Pattern
Amp Draw	60mA	• Polycarbonate Lens & Housing
Dimensions	2.0" Diam. x 1.8" Depth	• Plated Brass Connector
Mounting	Grommet	• 10 Year Warranty
Connector	PL-10	
Legal Heading	P2 P3	
DOT/SAE	J592, J2042	

LED CLEARANCE MARKER

NEW

2-1/2" ROUND CLEARANCE MARKER

10 YEAR WARRANTY



NEW

NEW

12/24 VOLTAGE



RCL & YCL Clear Lens



M11300R-KIT with Grommet & Pigtail

PART NUMBER	DESCRIPTION
M11300R	RED
M11300RCL	RED CLEAR LENS
M11300R-KIT	RED KIT WITH M50100-B & M50950
M11300Y	AMBER
M11300YCL	AMBER CLEAR LENS
M11300Y-KIT	AMBER KIT WITH M50100-B & M50950
M11300R-DV	RED – 12/24VDC DUAL VOLTAGE
M11300Y-DV	AMBER – 12/24VDC DUAL VOLTAGE

LEDs	13	• 2-1/2" Round Clearance Marker
Voltage	12.8VDC (12/24 - DV Models)	• Available in Colored or Clear Lens
Amp Draw	100mA Red / 55mA Amber	• Available in 12/24VDC Dual Voltage
- DV Models	70mA 12V / 40mA 24V	• Also Available in Retail KIT with Grommet & Pigtail
Dimensions	2.5" Diam. x 0.7" Depth	• Polycarbonate Lens & Housing
Mounting	Grommet	• Plated Brass Connector
Connector	PL-10	• 10 Year Warranty
Legal Heading	P2 P3	
DOT/SAE	J592, J2042	

2-1/2" ROUND CLEARANCE MARKER & CM/ABS

5 YEAR WARRANTY

Vantage



ABS Light

PART NUMBER	DESCRIPTION
M16280R	RED
M16280Y	AMBER
M16280RCL	RED CLEAR LENS
M16280YCL	AMBER CLEAR LENS
M16280ABS	2-1/2" AMBER ABS

LEDs	8	• 2-1/2" Round Amber ABS
Voltage	12.8VDC	• 2-1/2" Round Clearance Marker
Amp Draw	40mA	• Also Available in Bulk Pack (-X)
Dimensions	2.5" Diam. x 0.8" Depth	• Sealed Moisture Proof Electronics
Mounting	Grommet	• Polycarbonate Lens & Housing
Connector	PL-10	• Plated Brass Connector
Legal Heading	P2 P3 & "ABS"	• 5 Year Warranty
DOT/SAE	J592, J2042	

2-1/2" BEEHIVE CLEARANCE MARKER

10 YEAR WARRANTY



PART NUMBER	DESCRIPTION
M11201R	RED
M11201Y	AMBER

LEDs	13	• 2-1/2" Beehive Clearance Marker
Voltage	12.8VDC	• Circular LED Pattern
Amp Draw	70mA	• Polycarbonate Lens & Housing
Dimensions	2.5" Diam. x 2.4" Depth	• Plated Brass Connector
Mounting	Grommet	• 10 Year Warranty
Connector	PL-10	
Legal Heading	P2 P3	
DOT/SAE	J592, J2042	

LED CLEARANCE MARKER

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

2-1/2" ROUND REFLEX REFLECTOR CLEARANCE MARKER



PART NUMBER	DESCRIPTION
M11256R	RED
M11256Y	AMBER

LED	1	• 2-1/2" Round Reflector CM
Voltage	12.8VDC	• Reflex Reflector Lens
Amp Draw	60mA	• Acrylic Lens/Polycarbonate Housing
Dimensions	2.5" Diam. x 0.8" Depth	• Sealed Corrosion Proof Electronics
Mounting	Grommet	• Plated Brass Connector
Connector	PL-10	• 10 Year Warranty
Legal Heading	A P2 P3	
DOT/SAE	J592, J594, J2042	

2-1/2" ROUND COMBINATION CLEARANCE MARKER — BULK PACK ONLY



PART NUMBER	DESCRIPTION
M11260R-X	RED
M11260Y-X	AMBER

LEDs	7	• 2-1/2" Round Combination Clearance Marker
Voltage	12.8VDC	• Sealed Moisture Proof Electronics
Amp Draw	100mA	• Polycarbonate Lens & Housing
Dimensions	2.5" Diam. x 0.9" Depth	• Plated Brass Connector
Mounting	Grommet	• 10 Year Warranty
Connector	PL-10	
Legal Heading	P2 P3 PC2	
DOT/SAE	J592, J2042	



WATERMELON CLEARANCE MARKERS



M17400R



M17400Y



M17400R Illuminated

PART NUMBER	DESCRIPTION
M17400R	RED
M17400RCL	RED CLEAR LENS
M17400Y	AMBER
M17400YCL	AMBER CLEAR LENS

Voltage	12.8VDC	• Diamond Optics – Superior Beam Pattern
Amp Draw	160mA / 20mA	• Acrylic Lens & Stainless Steel Bezel
Dimensions	3.9" DIAM. X 2.4" D (WITH BEZEL)	• DOT Compliant P2/P3 Clearance Marker
Mounting	2 Hole Surface, 3.2" C to C	• 3-Wire High / Low Intensity
Connector	3 Wire, 7 inch, .180 Bullets	• .180 Male Bullet Terminals
LEDs	9	• 5 Year Warranty
Legal Heading	P2, P3	
DOT/SAE	J592, J2042	



M17400RCL



M17400YCL



Side Profile

LED CLEARANCE MARKER

2-1/2" RECTANGULAR CLEARANCE MARKER



PART NUMBER	DESCRIPTION	MOUNTING ACCESSORIES
M20320R	RED	M20325 CHROME BASE W/SINGLE LEAD
M20320Y	AMBER	M20326 BLACK BASE W/SINGLE LEAD
		M20327 BLACK BASE W/TWIN LEADS
		M20328 CHROME BASE W/TWIN LEADS

LEDs	8
Voltage	12.8VDC
Amp Draw	40mA
Dimensions	2.5" W x 1.3" H x 1.0" D
Mounting	Base
Connector	See Mounting Accessories
Legal Heading	P2 P3
DOT/SAE	J592, J2042

- 2-1/2" Rectangular Clearance Marker
- Plugs into Existing Mounting Base
- Polycarbonate Lens & Housing
- 10 Year Warranty

MOUNTING ACCESSORIES - SEE PG. 115

4" RECTANGULAR CLEARANCE MARKER




PART NUMBER	DESCRIPTION	MOUNTING ACCESSORIES
M20350R	RED	M20355 CHROME BASE W/SINGLE LEAD
M20350Y	AMBER	M20356 BLACK BASE W/SINGLE LEAD
M20350RY	DUAL RED/AMBER	M20357 BLACK BASE W/TWIN LEADS
M20350RCL	RED CLEAR LENS	M20358 CHROME BASE W/TWIN LEADS
M20350YCL	AMBER CLEAR LENS	

LEDs	12
Voltage	12.8VDC
Amp Draw	50mA Red, RY / 40mA Amber
Dimensions	3.8" W x 1.2" H x 0.9" D
Mounting	Base
Connector	See Mounting Accessories
Legal Heading	P2 P3 (M20350RY P2)
DOT/SAE	J592, J2042 (M20350RY J592)

- 4" Rectangular Clearance Marker
- Plugs into Existing Mounting Base
- Polycarbonate Lens & Housing
- 10 Year Warranty

MOUNTING ACCESSORIES - SEE PG. 115

4" RECTANGULAR CLEARANCE MARKERS

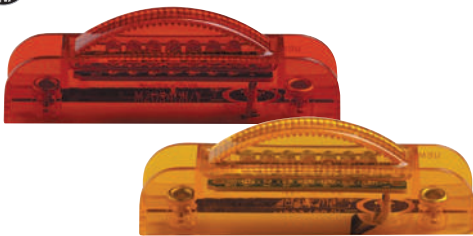

PART NUMBER	DESCRIPTION
M20340R	RED
M20340Y	AMBER

LEDs	7
Voltage	12.8VDC
Amp Draw	40mA
Dimensions	4.0" W x 0.8" H x 1.3" D
Mounting	2 Hole Surface, 3" C to C
Connector	0.180" Bullet & # 10 Ring Terminal
Legal Heading	P2 P3
DOT/SAE	J592 J2042

- Thin-Line Design Fits Rails
- Standard 3" Mounting Holes
- Polycarbonate Lens & Housing
- Completely Sealed
- 10 Year Warranty

4" RECTANGULAR CLEARANCE MARKERS — LOW PROFILE



PART NUMBER	DESCRIPTION
M20341R	RED
M20341Y	AMBER
M20341RCL	RED CLEAR LENS
M20341YCL	AMBER CLEAR LENS
M20342R-JX	RED TWIN BULLET CONNECTORS
M20342Y-JX	AMBER TWIN BULLET CONNECTORS

LEDs	7
Voltage	12.8VDC
Amp Draw	100mA
Dimensions	4.0" W x 0.6" H x 0.7" D
Mounting	2 Hole Surface, 3" C to C 19/32" Hole Required

Connector	
M20341:	2 Leads, .180 Bullet & Ring, 6.5"
M20342:	2 Leads, .180 Bullets, 6.5"
Legal Heading	P2 P3 PC2
DOT/SAE	J592, J2042
Warranty	5 Year Warranty

M20342Y-JX and M20342R-JX

LED CLEARANCE MARKER

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP


CLEARANCE MARKER

ACCESSORIES

4" COMBINATION CLEARANCE MARKER



M23015R



M23015RY



M23015RCL



M23015RYCL

PART NUMBER	DESCRIPTION
M23015R	RED
M23015R-X	RED – BULK PACK
M23015Y	AMBER
M23015Y-X	AMBER – BULK PACK
M23015RCL	RED CLEAR LENS
M23015YCL	AMBER CLEAR LENS
M23015R-DV	RED – 12/24VDC DUAL VOLTAGE
M23015Y-DV	AMBER – 12/24VDC DUAL VOLTAGE



LEDs	14	• 4" Combination Clearance Marker
Voltage	12.8VDC (12/24 - DV Models)	• Available in Colored or Clear Lens
Amp Draw	110mA	• Also Available in 12/24VDC Dual Voltage
- DV Models	50mA 12V / 50mA 24V	• Polycarbonate Lens & Housing
Dimensions	4.0" W x 2.0" H x 1.0" D	• 5 Year Warranty
Mounting	2 Hole Surface, 3" C to C	
Connector	2 Leads, .180 Bullet & Ring, 6"	
Legal Heading	P2 P3 PC2	ADDITIONAL MODELS - SEE PG. 93
DOT/SAE	J592 J2042	

6" CLEARANCE MARKER



YCL Clear Lens



M20332R-BLK



M20332Y-BLK

PART NUMBER	DESCRIPTION
M20332R	RED WITH STAINLESS STEEL BEZEL
M20332Y	AMBER WITH STAINLESS STEEL BEZEL
M20332YCL	AMBER CLEAR LENS WITH STAINLESS STEEL BEZEL
M20332R-BLK	RED WITH BLACK STEEL BEZEL
M20332Y-BLK	AMBER WITH BLACK STEEL BEZEL

LEDs	12	• 6" Clearance Marker
Voltage	12.8VDC	• Stainless Steel Bezel or New Black Bezel Models
Amp Draw	60mA	• Polycarbonate Lens & Housing
Dimensions	6.2" W x 1.8" H x 1.0" D	• Solid State Circuit Board
Mounting	2 Hole Surface, 3-15/16" C to C	• 10 Year Warranty
Connector	2 Leads .180 Bullet & Ring, 6"	
Legal Heading	P2 P3	
DOT/SAE	J592, J2042	

LED CLEARANCE MARKER

STAINLESS STEEL OVAL CLEARANCE MARKER



M36180YCL

PART NUMBER	DESCRIPTION
M72270R	RED
M72270Y	AMBER
M72270RCL	RED CLEAR LENS
M72270YCL	AMBER CLEAR LENS

LEDs	13	<ul style="list-style-type: none"> Stainless Oval Clearance Marker US Patent No. D514008 Snap On Stainless Steel Bezel Ideal for Cab & Sleeper Panels Polycarbonate Lens & Housing 10 Year Warranty
Voltage	12.8VDC	
Amp Draw	60mA	
Dimensions	6.5" W x 2.0" H x 0.9" D	
Mounting	2 Hole Surface, 4-5/8" C to C	
Connector	PL-10	
Legal Heading	P2 P3	
DOT/SAE	J592, J2042	

MINI STAINLESS STEEL CLEARANCE MARKER



M36180RCL

M36180YCL

PART NUMBER	DESCRIPTION
M36180R	RED
M36180Y	AMBER
M36180RCL	RED CLEAR LENS
M36180YCL	AMBER CLEAR LENS

LEDs	7	<ul style="list-style-type: none"> Mini Stainless Clearance Marker US Patent No. D514008 Snap-On Stainless Steel Bezel Ideal for Cab & Sleepers Panels Polycarbonate Lens & Housing Solid State Circuit Board 10 Year Warranty
Voltage	12.8VDC	
Amp Draw	50mA	
Dimensions	3.0" W x 2.0" H x 0.9" D	
Mounting	2 Hole Surface, 2-5/16" C to C	
Connector	PL-10	
Legal Heading	P2 P3	
DOT/SAE	J592, J2042	

5" CLEARANCE MARKER



PART NUMBER	DESCRIPTION
M27340R	RED
M27340Y	AMBER

LEDs	12	<ul style="list-style-type: none"> 5" Bus Clearance Marker 2 Hole Surface Mount Moisture Proof Sealed Electronics Polycarbonate Lens & Housing 10 Year Warranty
Voltage	12.8VDC	
Amp Draw	80mA Red / 60mA Amber	
Dimensions	5.2" W x 2.1" H	
Mounting	2 Hole Surface, 3-1/16" C to C	
Connector	2 Leads, .180 Bullet & Ring, 5"	
Legal Heading	P2 P3	
DOT/SAE	J592, J2042	

LED CLEARANCE MARKER

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES


2" X 6" COMBINATION CLEARANCE MARKER



PART NUMBER	DESCRIPTION
M20395R	RED
M20395Y	AMBER

LEDs	18	• Combination Clearance Marker
Voltage	12.8VDC	• US Patent No. 7,273,306 B2
Amp Draw	200mA	• Polycarbonate Lens & Housing
Dimensions	5.9" W x 2.0" H x 1.9" D	• 5 Year Warranty
Mounting	2 Hole Surface, 4-13/16" C to C	
Connector	PL-10	
Legal Heading	P2 P3 PC2	
DOT/SAE	J592, J2042	

2" X 6" REFLECTORIZED AUXILIARY TURN/CLEARANCE MARKER

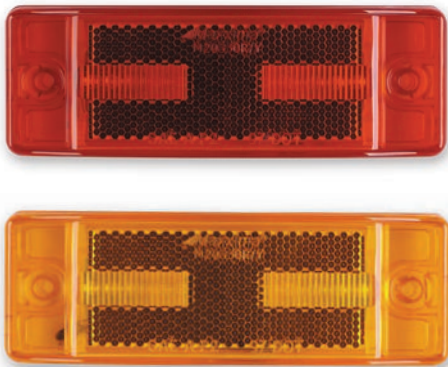

PART NUMBER	DESCRIPTION
M20330R	RED
M20330Y	AMBER

LEDs	8	• Reflex Reflector Clearance Marker
Voltage	12.8VDC	• Auxiliary Turn
Amp Draw	120mA / 70mA	• Classic Reflector Lens Design
Dimensions	5.9" W x 2.1" H x 1.6" D	• High Impact Acrylic Lens & Polycarbonate Housing
Mounting	2 Hole Surface, 4-13/16" C to C	
Connector	3 Leads .180 Bullets, 6"	• 5 Year Warranty
Legal Heading	A P2 P3 PC2	
DOT/SAE	J592, J594, J2042	

KENWORTH AND PETERBILT STYLE CLEARANCE MARKER




PART NUMBER	DESCRIPTION
M17210Y	AMBER – PETERBILT & KENWORTH
M17210YCL	AMBER CLEAR LENS – PETERBILT & KENWORTH

LEDs	9	• Available in Amber, and Amber Clear Lens
Voltage	12.8VDC	• OE-Style Connector fits factory harness
Amp Draw	100mA	• Acrylic Lens and ABS Housing
Dimensions	4.5" W x 1.6" H x 0.5" D (1.6" Overall Depth)	• Mounting Screws & Gasket Included
Mounting	2 Hole Surface, 3.23" C to C	• 5 Year Warranty
Connector	Integrated OEM Connector	
Legal Heading	P2 P3	
DOT/SAE	J592, J2042	

**Kenworth and Peterbilt are registered trademarks of Paccar*

LED CLEARANCE MARKER


RECTANGLE CLEARANCE MARKER LIGHT & REFLEX REFLECTOR

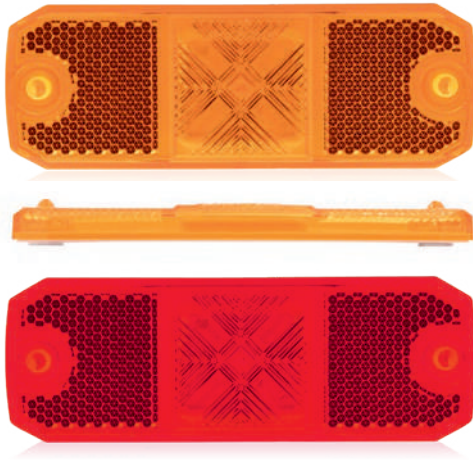

PART NUMBER	DESCRIPTION
M17100Y-DV	AMBER CLEARANCE MARKER / REFLECTOR
M17100YDV-X	AMBER CLEARANCE MARKER / REFLECTOR – BULK
M17100R-DV	RED CLEARANCE MARKER / REFLECTOR

LEDs	3
Voltage	12/24VDC
Amp Draw	35mA
Dimensions	4.68" L x 1.65" W x 0.39" D
Mounting	2 Hole Surface, 4" C to C
Connector	2 Leads Blunt Cut, 7"
Legal Heading	A P2 P3
DOT/SAE	J592, J594, J2042

- Clearance Marker & Reflector
- DOT/SAE Class A Reflex Reflector
- High Impact Acrylic Reflex Reflector Lens
- 12/24VDC Dual Voltage
- 5 Year Warranty



Includes Screws, Caps, & Gasket

NEW

WESTERN TRAILERS OE-STYLE CLEARANCE MARKERS



M63125R-WT



M63125Y-WT



Clear Lens
M63125RCL-WT,
M63125YCL-WT

PART NUMBER	DESCRIPTION
M63125R-WT	WESTERN TRAILERS RED SIDE CLEARANCE MARKER – BULK PACK
M63125Y-WT	WESTERN TRAILERS AMBER SIDE CLEARANCE MARKER – BULK PACK
M63125RCL-WT	WESTERN TRAILERS RED CLEAR LENS SIDE CLEARANCE MARKER – BULK PACK
M63125YCL-WT	WESTERN TRAILERS AMBER CLEAR LENS SIDE CLEARANCE MARKER – BULK PACK
M63125RAS-WT	WESTERN TRAILERS RED SIDE CLEARANCE MARKER / AUX. STOP – BULK PACK

LEDs	6	• Fits Existing Western Trailers Housing
Voltage	12.8VDC	• Polycarbonate Lens/Housing
Amp Draw	55mA	• Available in Colored Lens or Clear Lens
Dimensions	4.7"W x 2.0"H x 1.2"D	• Lightning Lens Optics
Mounting	2 Hole Surface, 3" C to C	• US Patent Number 8,009,364
Connector	2 Leads, .180 Bullets, 4"	• US Patent No. 8,717,679 B2
Legal Heading	P2 P3 PC2	• Also Available in 3-Wire Red Aux. Stop
DOT/SAE	J592, J2042	• 5 Year Warranty

FITS EXISTING OEM HOUSING



3-Wire
M63125RAS-WT

LED CLEARANCE MARKER

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

NEW

CHROME CAB MARKER

5 YEAR WARRANTY



NEW

PART NUMBER	DESCRIPTION
M17011Y	AMBER
M17011YCL	AMBER CLEAR LENS

LEDs	17	• Chrome Cab Marker
Voltage	12.8VDC	• Available in Amber or Clear Lens
Amp Draw	160mA	• Popular Pete & KW Styles
Dimensions	10.6" L x 3.9" W x 2.8" H	• Acrylic Lens
Mounting	2 Hole Surface, 9-5/32" C to C	• Chrome ABS Housing
Connector	2 Leads Blunt Cut, 19"	• Includes Gasket, Mounting Screws & O'Ring Seals
Legal Heading	P2 P3 PC2	• 5 Year Warranty
DOT/SAE	J592, J2042	

FLUSH MOUNT CAB LIGHT

10 YEAR WARRANTY



PART NUMBER	DESCRIPTION
M20361Y	AMBER
M20361RCL	RED CLEAR LENS

LEDs	6	• Flush Mount Cab Marker
Voltage	12.8VDC	• Designed for Flush Mounting
Amp Draw	90mA	• High Impact Acrylic Lens & Housing
Dimensions	4.6" W x 2.3" H x 0.7" D	• Gasket & Connector Included
Mounting	2 Hole Surface, 3-5/8" C to C	• For Freightliner & Volvo*
Connector	PL-2 Included	• 10 Year Warranty
Legal Heading	P2 P3	
DOT/SAE	J592, J2042	

* Freightliner / Volvo are Registered Trademarks

TRIANGLE COMBINATION CAB MARKER

10 YEAR WARRANTY



PART NUMBER	DESCRIPTION
M20311R	RED
M20311Y	AMBER

LEDs	15	• Triangle Combination Cab Marker
Voltage	12.8VDC	• Horizontal or Vertical Mount
Amp Draw	80mA	• Moisture Proof Sealed Electronics
Dimensions	3.3" W x 2.6" H x 1.7" D	• Polycarbonate Lens & Housing
Mounting	2 Hole Surface, 1-15/32" C to C	• 10 Year Warranty
Connector	2 Leads, .180 Bullet & Ring, 6"	
Legal Heading	P2 P3 PC2	
DOT/SAE	J592, J2042	

LED ID BARS

SURFACE MOUNT ID BAR/CENTER HIGH MOUNT STOP LIGHT (CHMSL)



PART NUMBER	DESCRIPTION
M63319R	RED
LEDs	9
Voltage	12.8VDC
Amp Draw	150mA CHMSL / 20mA ID Bar
Dimensions	15.4" L x 1.2" W x 0.7" D
Mounting	2 Hole Surface, 14-9/16" C to C Horizontal Only
Connector	3 Leads Blunt Cut, 14.5"
Legal Heading	P2 P3 U3
DOT/SAE	J592, J2042, J1957

- Dual Function Operation
- Polycarbonate Lens & Housing
- Sleek Low Profile Design
- Two Hole Surface Mount-
Horizontal Only
- 5 Year Warranty

STAINLESS STEEL ID BAR



PART NUMBER	DESCRIPTION
M20323R	RED
LEDs	24 (8 per light)
Voltage	12.8VDC
Amp Draw	120mA
Dimensions	16.3" W x 1.4" H
Mounting	2 Hole Surface, 15-7/8" C to C
Connector	2 Leads Blunt Cut, 12"
Legal Heading	P2 P3
DOT/SAE	J592, J2042

- Stainless Steel ID Bar
- Three M20320R Lights
- 2 Hole Surface Mount
- Polished Stainless Steel
- 1 Year Warranty For Stainless Steel Bar
- 10 Year Warranty For Lamps

ALUMINUM ID BAR



PART NUMBER	DESCRIPTION
M20343R	RED
M20343Y	AMBER
LEDs	21 (7 per light)
Voltage	12.8VDC
Amp Draw	120mA
Dimensions	17.1" W x 1.0" H
Mounting	2 Hole Surface, 16-1/2" C to C
Connector	2 Leads Blunt Cut, 12"
Legal Heading	P2 P3
DOT/SAE	J592, J2042

- Aluminum ID Bar
- Three M20340-Series Lights
- 2 Hole Surface Mount
- 1 Year Warranty For Aluminum Bar
- 10 Year Warranty For Lamps

LED ID BARS

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

1-1/4" ROUND ID BAR



PART NUMBER	DESCRIPTION
M09410R-RM3	RED

LEDs	18 (6 per light)	<ul style="list-style-type: none"> • (3) M09410R Mounted in Aluminum Bar • Sealed Moisture Proof Electronics • Polycarbonate Lens • 1 Year Warranty For Aluminum Bar • 5 Year Warranty
Voltage	12.8VDC	
Amp Draw	240mA	
Dimensions	16.25" L x 2.13" W x 1.18" D	
Mounting	2 Hole Surface, 15.67" C to C	
Connector	2 Leads, 1 Blunt, 1 Ring, 10"	
Legal Heading	P2 P3 PC2	
DOT/SAE	J592, J2042	

M09300R-3 3/4" ROUND ID MARKER LIGHT KIT




PART NUMBER	DESCRIPTION
M09300R-3	RED


LEDs	9 (3 per light)	<ul style="list-style-type: none"> • 3/4" Mini Round CM • Space Saving Design • Polycarbonate Lens/Housing • Grommet Included • Sealed Moisture Proof Electronics • Optional Stainless Steel Bezel • 5 Year Warranty
Voltage	12.8VDC	
Amp Draw	160mA	
Dimensions	3/4" Diam.	
Mounting	Grommet—3/4" Cutout	
Connector	2 Leads .180 Bullets, 56"	
Legal Heading	P2 P3 PC2	
DOT/SAE	J592, J2042	

LEARN MORE AT
WWW.MAXXIMA.COM

FIND THE MOST UP-TO-DATE
PRODUCTS AND SPECIFICATIONS

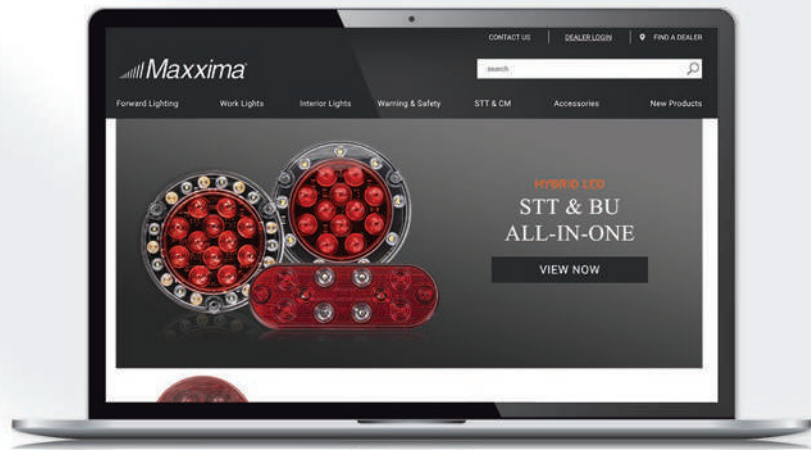

ACCESSORIES

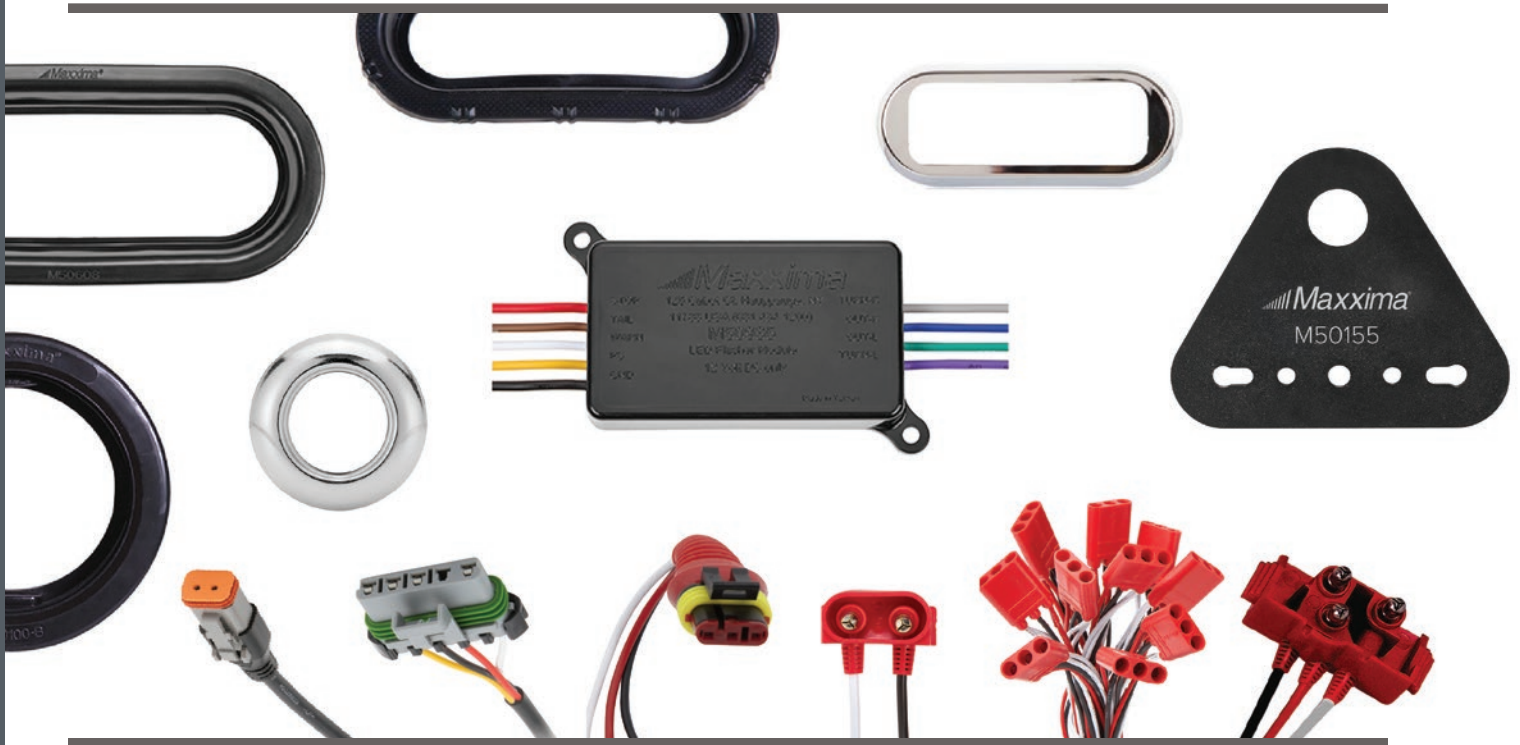

ELECTRICAL CONNECTORS AND FLASHERS

MOUNTING ACCESSORIES

RETAIL DISPLAYS

***MaxximaStyle* 120V AC-POWERED LIGHTS**

DOT LIGHTING CODES

CONNECTORS

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

M50900
3-PIN PL-3 RIGHT ANGLE



- PL-3 Right Angle Pigtail Connector
- 3 Wires, (2) Blunt Cut, (1) Ring 12" Long

M50900-X
3-PIN PL-3 RIGHT ANGLE 50 PIECE BUNDLE



- PL-3 Right Angle – Bulk Pack
- 3 Wires, (2) Blunt Cut, (1) Ring 12" Long

M50933
3-PIN PL-3 RIGHT ANGLE TO .180 BULLETS



- PL-3 Right Angle to 0.180" Male Bullet
- 3 Wires, 12" Long

M50911
3-PIN PL-3 STRAIGHT



- PL-3 Straight
- 3 Wires Blunt Cut, 10" Long

M50911-X
3-PIN PL-3 STRAIGHT – BULK PACK




- PL-3 Straight – Bulk Pack
- 3 Wires Blunt Cut, 10" Long

M50901
3-PIN PL-3 EXTENSION HARNESS



- PL-3 Male Right Angle to PL-3 Female
- 3 Wires, 4" Long

M50908
3-PIN DryFit CONNECTOR



- 3-Pin DryFit Connector
- 3 Wires, (2) Blunt Cut, (1) Ring 10" Long

M50903
3-PIN PL-3 TO MALE DryFit ADAPTER




- PL-3 Right Angle to DryFit
- 3 Wires, 4" Long

M50904
3-PIN PL-3 TO MALE GROTE ADAPTER



- PL-3 Right Angle to Grote Male Pin
- 3 Wires, 3-1/4" Long

M50932
3-PIN PL-3 SPLITTER ADAPTER

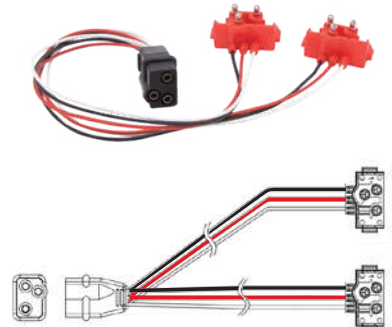

- Two (2) PL-3 Male to PL-3 Female B3
- 6 Wires, 12" Long

NEW
M50922
2-PIN PL-2 CONNECTOR



- PL-2 Right Angle Connector
- 2 Wires (1) Blunt Cut, (1) Ring 10" Long
- Designed for Back-Up Lamps or Other 2-Wire Connections

CONNECTORS

M50916

3-PIN DELPHI CONNECTOR FOR M63123Y



- OE-Style Delphi Connector for M63123Y
- 3 Wires Blunt Cut, 6" Long

M50930

5-PIN METRI-PACK CONNECTOR



- OE-Style Connector for M42222, M42223L
- 4 Jacketed Wires, 7" Long

M50931

2-WIRE DEUTSCH-STYLE DT-06



- DT06-2S Mates with DT04-2P
- 2 Jacketed Wires, 4.5" Long

M50950

2-PIN PL-10 RIGHT ANGLE



- PL-10 Right Angle Pigtail Connector
- 2 Wires, (1) Blunt Cut, (1) Ring, 6" Long

M50950-X

2-PIN PL-10 RIGHT ANGLE 50 PIECE BUNDLE



- PL-10 Right Angle – Bulk Pack
- 2 Wires, (1) Blunt Cut, (1) Ring, 6" Long

M50950-X18

2-PIN PL-10 – 18 INCH – BULK PACK



- PL-10 Right Angle Pigtail Connector
- 2 Wires, (1) Blunt Cut, (1) Ring, 18" Long

M50951

2-PIN PL-10 RIGHT ANGLE - .180 BULLETS



- PL-10 Right Angle Pigtail Connector
- 2 Wires, .180 Bullets, 6" Long

M50953

2-PIN DryFit CONNECTOR



- 2-Pin DryFit Connector
- 2 Wires, Blunt Cut, 5" Long

M50905

3-PIN LOAD EQUALIZER



- Inline Load Resistor
- PL-3 Male to PL-3 Female
- 3 Wires, 15" Long

OEM SOLUTIONS



- CONTACT MAXXIMA TO DISCUSS YOUR CUSTOM NEEDS
- OE CONNECTORS, CUSTOM WIRE LENGTH, COLOR REQUIREMENTS. ETC.

CONTINUOUS WIRE HARNESS ROLLS

M50900-100
3-PIN PL-3 RIGHT ANGLE PLUG
12" SPACING
100 CONNECTORS PER ROLL

M50950A-100
2-PIN PL-10 PLUG
12" SPACING
100 CONNECTORS PER ROLL

M50950A-200
2-PIN PL-10 PLUG
6" SPACING
200 CONNECTORS PER ROLL

M50960-50 2-PIN FEMALE .180 BULLET 12" SPACING, 50 PER ROLL
M50960-100 2-PIN FEMALE .180 BULLET 12" SPACING, 100 PER ROLL
M50960-5024 2-PIN FEMALE .180 BULLET 24" SPACING, 50 PER ROLL

NEW

M50965-100 3-PIN FEMALE .180 BULLET
12" SPACING, 100 PER ROLL

STOP/TURN/TAIL 6-FOOT HARNESS

M50700-X
DUAL 3-PIN PL-3 72" HARNESS – BULK PACK

- Two (2) PL-3 Straight Pigtails
- Jacketed Harness, 72" Long

CONTROL MODULES

M50956
REMOTE ON/OFF INLINE LIGHT CONTROLLER

- Use First Light in Series to Turn On/Off Other Lights in the Series

M50909
24V TO 12V STEP DOWN MODULES 1 AMP

- 24V input, 12V output, 1 Amp
- 4 Leads, Blunt Cut, 3"

M50913
24V TO 12V STEP DOWN MODULES 2 AMP

- 24V input, 12V output, 2 Amp
- 4 Leads, Blunt Cut, 3"

PROGRAMMABLE FLASHER



PART NUMBER	DESCRIPTION
M50910	PROGRAMMABLE LED FLASHER

Voltage	12.8VDC	• 16 Flash Patterns
Amp Draw	20A Max	• 20 Amp Heavy Duty Flasher
Dimensions	3.2" W x 1.9" H x 0.6" D	• 2 Outputs, 10 Amps each
Connector	7 Leads, Blunt Cut, 11"	• Simultaneous or Alternate Wig-Wag Flash

NEW

M50935 STOP / TURN / TAIL LED FLASHER MODULE WITH HIGH LOW



PART NUMBER	DESCRIPTION
M50935	LED FLASHER CONTROL MODULE WITH HI / LOW OUTPUT


Voltage	12.8VDC	• Multi-Function Programmable Flasher and Aux. S/T/T Module with High / Low Output
Dimensions	3.2" W x 1.9" H x 0.6" D	• 28 Programmable Flash Patterns
Mounting	2 Hole Surface, 3-7/8" C to C	• Up to 4 Memory Slots, or Modes, Available
Connector	9 Wires Blunt Cut, 11"	• As Flasher, 12 Amp Max Output – 2 Channels, 6A Per Channel
		• S/T/T Outputs Allow Aux. Lighting Device with 2-Wires to be Connected to Vehicle S/T/T Circuit and Will Illuminate Aux. Light in Low Intensity with Tail Lights and High Intensity for Stop or Turn Functions
		• Can Also be Used to Convert a 4-Wire S/T/T Circuit to a 3-Wire S/T/T Circuit
		• Surface Mounts with 2 Screws
		• 1 Year Warranty



M50935 with 196" Ring of Safety or Qty. (2) 96" Rings of Safety



SMART AUTO-SENSE LED LOAD EQUALIZER

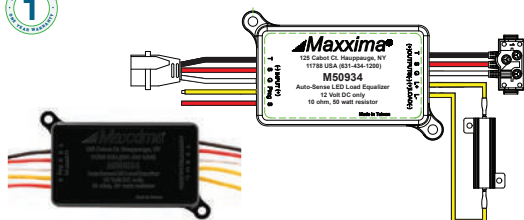

PART NUMBER	DESCRIPTION
M50934	3-PIN SMART AUTO-SENSE LED LOAD EQUALIZER

Voltage	12.8VDC
Dimensions	3.2" W x 1.9" H x 0.6"
Resistor Only:	3.1" L x 1.2" W x 0.6" D with 6" Lead
Connector	3-pin PL-3 Male to 3-pin PL-3 Female, 13" Overall Length
Resistance	10 ohm, 50 watt resistor

* For compliance with Lamp-Out Hyperflash
* Programmable Stop/Turn Current Threshold

HEADLIGHT LOAD RESISTOR FOR LED HEADLIGHTS



PART NUMBER	DESCRIPTION
M50914	LOAD RESISTOR FOR 4" X 6" HEADLIGHTS
M50915	LOAD RESISTOR FOR 5" X 7" & 7" ROUND HEADLIGHTS

Voltage	12.8VDC
Dimensions	3.1" L x 1.2" W x 0.6" D with 35" Lead
Resistor Only:	3.1" L x 1.2" W x 0.6" D with 35" Lead
Connector	3-pin H4 Male to 3-pin H4 Female, 12"
Resistance	10 ohm, 50 watt resistor

Designed for applications where LED headlight low beam amp draw is too small.

4" ROUND MOUNTING



PART NUMBER	DESCRIPTION
M50400-B	4" BLACK VINYL GROMMET
M50400-X	4" BLACK VINYL GROMMET – BULK PACK
M43900	KIT: 4" VINYL GROMMET + PL-3 PIGTAIL
M50405	4" CHROME PLASTIC GROMMET COVER
M43253CH	STAINLESS STEEL SNAP ON FLANGE, GLOSS
M43253	STAINLESS STEEL SNAP ON FLANGE, MATTE

6" OVAL MOUNTING



PART NUMBER	DESCRIPTION
M50600-B	6" BLACK VINYL GROMMET
M50600-X	6" BLACK VINYL GROMMET – BULK PACK
M50606-X	6" BLACK VINYL GROMMET, RECESSED
M50607	6" BLACK VINYL GROMMET, LOW PRO
M50608	6" BLACK VINYL GROMMET, LOW PRO, SMOOTH
M50605	6" CHROME PLASTIC GROMMET COVER
M63253CH	6" POLYCARBONATE SNAP ON FLANGE
M50146	6" STAINLESS BEZEL FOR M63350-SERIES



3" X 5" RECTANGULAR MOUNTING



PART NUMBER	DESCRIPTION
M49700	3" X 5" VINYL GROMMET
M49701-X	3" X 5" VINYL GROMMET, LOW PROFILE
M49705	3" X 5" GROMMET COVER
49702	3" X 5" SNAP ON FLANGE

2" X 4" RECTANGULAR MOUNTING



PART NUMBER	DESCRIPTION
M50310	CHROME METAL BEZEL, M23015-SERIES
M50311	CHROME PLASTIC BEZEL, M23015-SERIES

MOUNTING ACCESSORIES

2.5" ROUND MOUNTING



PART NUMBER	DESCRIPTION
M50100-B	2.5" BLACK VINYL GROMMET
M50100-X	2.5" BLACK VINYL GROMMET – BULK PACK
M50101-X	2.5" VINYL GROMMET, NO SLIT CABLE EXIT
M50102-X	2.5" BLACK VINYL GROMMET, CLOSED BACK
M50105	2.5" CHROME PLASTIC GROMMET COVER
M50103	2.5" SNAP ON FLANGE
M50153CH	2.5" SNAP ON FLANGE, RECESSED

2" ROUND MOUNTING



PART NUMBER	DESCRIPTION
M50300-B	2" BLACK VINYL GROMMET
M50300-X	2" BLACK VINYL GROMMET – BULK PACK
M50305	2" CHROME PLASTIC GROMMET COVER
M50303	2" SNAP ON FLANGE
M50313CH	2" SNAP ON FLANGE, RECESSED

1.25" ROUND MOUNTING



PART NUMBER	DESCRIPTION
M50132	1.25" BLACK GROMMET FOR M09400-SERIES
M50118	1.25" STAINLESS GROMMET COVER
M50118-X	1.25" STAINLESS GROMMET COVER – BULK

0.75" ROUND MOUNTING



PART NUMBER	DESCRIPTION
M50133	0.75" BLACK GROMMET
M50125	0.75" BLACK GROMMET – WIDE CHANNEL
M50112	0.75" STAINLESS GROMMET COVER
M50112-X	0.75" STAINLESS GROMMET COVER – BULK

MOUNTING ACCESSORIES

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

M20320-SERIES / M20350-SERIES BRACKETS



M20325



M20326



M20328



M20327

PART NUMBER	DESCRIPTION
M20325	M20320-SERIES CHROME BASE, SINGLE LEAD
M20326	M20320-SERIES BLACK BASE, SINGLE LEAD
M20327	M20320-SERIES BLACK BASE, DUAL LEAD
M20328	M20320-SERIES CHROME BASE, DUAL LEAD
M20355	M20350-SERIES CHROME BASE, SINGLE LEAD
M20356	M20350-SERIES BLACK BASE, SINGLE LEAD
M20357	M20350-SERIES BLACK BASE, DUAL LEAD
M20358	M20350-SERIES CHROME BASE, DUAL LEAD

See page 100 for light heads



M20355



M20358



M20356




M20357



M20350RY shown with M20355

M50121-A BRACKET FOR M20389-SERIES, M20494-SERIES



M50121-A shown with M20389YCL

PART NUMBER	DESCRIPTION
M50121-A	MOUNTING BRACKET M20389, M20394

- Compatible with M20389-Series
- Compatible with M20394-Series

See pages 56 & 57 for light heads

M50155 POLE MOUNT ADAPTER BRACKET



M50155
Shown on Pole



M50155
with MWL-510

PART NUMBER	DESCRIPTION
M50155	POLE MOUNT ADAPTER BRACKET

- Compatible with MWL-500, MWL-501
- Compatible with MWL-510, MWL-511
- Compatible with MWL-520, MWL-521
- Compatible with MWL-61-A
- Use with Industry Standard Poles

See pages 18 & 19 for work lights

HDI-DISP-20 FULL LINE DISPLAY



DIMENSIONS 22" x 22"

HDI-DISP-16 INTERIOR DOME LIGHT DISPLAY



DIMENSIONS 22" x 22"

HDI-DISP-8 WARNING LIGHT DISPLAY



DIMENSIONS 18.5" x 12"

HDI-DISP-9 MLS DISPLAY



DIMENSIONS 21.7" x 12.6"

CUSTOM RETAIL DISPLAYS FOR WORK LIGHTS, WARNING & SAFETY



Contact your local Maxxima Sales Rep
to inquire about custom display offerings

MRD-1 COUNTER TOP DISPLAY



DIMENSIONS 14" W X 18" H X 8" D

- Counter Top Display
- Ships with Hooks
- Does Not Include Product
- Great for Add-On Sales

2-FOOT LED SHOP LIGHTS & UTILITY LIGHTS — 120VAC



PART NUMBER	DESCRIPTION
MSL-202500C	CLEAR LENS, 2,500 LUMEN
MSL-202000F	FROSTED LENS, 2,000 LUMEN
MSL-205000F	FROSTED LENS, 5,000 LUMEN - ADJUSTABLE

Approx. Dimensions 24" L x 5" W x 2" D
Ratings 120VAC, 20W, ETL Listed
 Safety Certification

- Available in Clear or Frosted LED Bulbs
- Available with Adjustable Heads, MSL-205000F
- Aluminum and polycarbonate housing
- Plug & play with 5' power cord
- Link up to 4 together with built in cord and plug
- Chain mounting kit included
- 3 Year Warranty

4-FOOT LED SHOP LIGHTS — 120VAC



PART NUMBER	DESCRIPTION
MSL-404800C	CLEAR LENS, 4,800 LUMENS
MSL-404400F	FROSTED LENS, 4,400 LUMENS
MSL-404600SC	MOTION SENSOR, 4,600 LUMENS

Dimensions 47.5" L x 5.1" W x 1.8" D
Ratings 120VAC, 40W, ETL Listed
 Safety Certification

- **MSL-404800C** – 4,800 Lumen Clear lens
- **MSL-404400F** – 4,400 Lumen Frosted Lens
- **MSL-404600SC** – 4,600 Lumen Clear Lens, Motion Sensor
- Aluminum and polycarbonate housing
- Plug & play with 5' power cord
- Link to 4 together with built in cord and plug
- 12" on/off pull chain
- Chain for hanging fixture (20-0.8" links provided for 13.5" overall length, 2mm thickness)
- Chain mounting kit included
- 5 Year Warranty

MPWL-SERIES PORTABLE WORK LIGHTS & STRING LIGHTS — 120VAC



MPWL-101L
12,000 Lumens



MPWL-151L
18,000 Lumens

PART NUMBER	DESCRIPTION
MPWL-101L	100W, 12,000 LUMENS, WORK LIGHT
MPWL-151L	150W, 18,000 LUMENS, WORK LIGHT
MPWL-S40L	60W, 7,500 LUMENS, 50 FT. STRING
MPWL-S100L	100W, 10,000 LUMENS, 50 FT. STRING

- Temporary High Bay Portable Work Lights in 100W or 150W
- **MPWL-101L** Linkable up to 8 units
- **MPWL-151L** Linkable up to 6 units
- 50 Foot Construction String Lights in 60W or 100W
- **MPWL-S40L** 5 Heads, 1,500 Lumens each, 7,500 Total
- **MPWL-S100L** 5 Heads, 2,000 Lumens each, 10,00 Total
- 3 Year Warranty



MPWL-S40L
7,500 Lumens Total



MPWL-S100L
10,000 Lumens Total

MULTI OUTLET SURGE PROTECTED POWER STRIPS — 120VAC



MEP-6A-4



MEP-6AB-4

PART NUMBER	DESCRIPTION
MEP-6A-4	6 OUTLET, WHITE - 4 PACK
MEP-6AB-4	6 OUTLET, BLACK - 4 PACK
MEP-1000	10 OUTLET + USB A, USB C

- **MEP-6A-4** White 6 Outlet Surge Protector, 4 Pack
- **MEP-6AB-4** Black 6 Outlet Surge Protector, 4 Pack
- **MEP-1000** Black 10 Outlet Surge Protector with (2) USB Ports for USB A and USB C
- All 3 models: 15 Amp Rated
- ETL Approved
- 1 Year Warranty



MEP-1000

PROMOTIONAL ITEMS

MAXXIMA DUFFLE BAG

MB-91



MAXXIMA WHEELED BAG

MB-95



BASE BALL CAPS

MCAP-BLACK / MCAP-NAVY



MAX-TAG
RE-ORDER TAGS




MAXXIMA DISPLAY BANNER

24" X 48"



**LEARN MORE AT
WWW.MAXXIMA.COM**

FIND THE MOST UP-TO-DATE
PRODUCTS AND SPECIFICATIONS

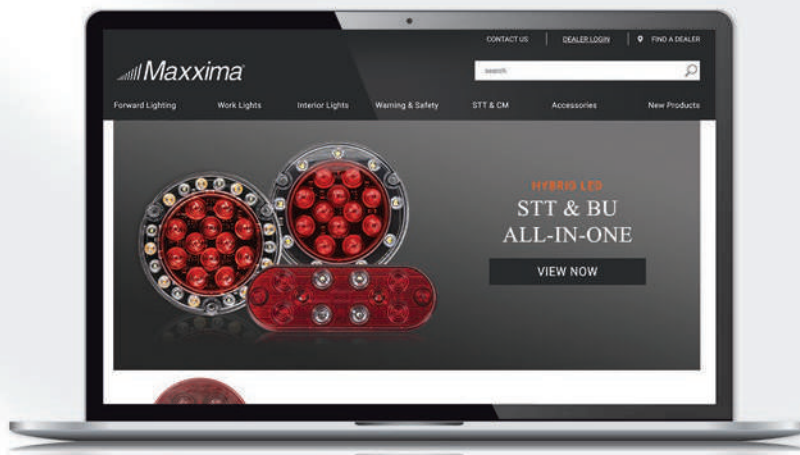


LED FLASHLIGHTS

NEW

MF-49-KIT RECHARGEABLE LED FLASHLIGHT KIT

2

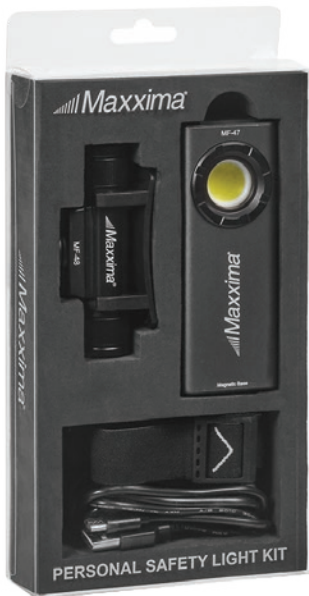

Maxxima Personal Safety Light Kit

PART NUMBER	DESCRIPTION
MF-49-KIT	MAXXIMA PERSONAL SAFETY LIGHT KIT
MF-47	1,350 LUMENS FLASHLIGHT

- Lumens** 1,350 / 500 / 80
 - Dimensions** 8" W x 4.5" H x 1.0" D
 - Power** Rechargeable, Non-Removable Battery
 - Mounting** Mag Bottom, Mag Back, or Rear Clip
- Kit Includes 2 Flashlights (MF-47 Flashlight and MF-48 Headband Flashlight)
 - MF-47 Multifunction: 1,350 Lm HI / 500 Lm MED / 80 Lm LO
 - MF-47 Top LED 80 Lumens
 - MF-48 Multifunction: HI / MED / LO + 2 SIDE RED LEDs
 - USB-C Cable Included
 - 2 Year Warranty



MF-47 Includes Dimming Feature

NEW

MF-46 RECHARGEABLE LED FLASHLIGHT

2



PART NUMBER	DESCRIPTION
MF-46	600 LUMENS FLASHLIGHT

- Lumens** 600 / 120 / 175
 - Dimensions** 1.2" W x 3.8" H x 0.8" D
 - Power** Rechargeable, Non-Removable Battery
 - Mounting** Mag Bottom, Mag Back, or Rear Clip
- Multi-Function Flashlight
 - Primary COB LED: 600 Lm HI / 120 Lm LO
 - Top LED Spotlight 175 Lm
 - USB-C Cable Included
 - 3Hr Charge / 9 Hr Run Time
 - 2 Year Warranty

MF-27 LED FLASHLIGHT

1



PART NUMBER	DESCRIPTION
MF-27	LED FLASHLIGHT

- Lumens** 70
 - Dimensions** 1.8" W x 5.8" H x 1.8" D
 - Power** 2 AA Batteries, (Not Included)
- 165 Foot Range
 - Waterproof IP44 Rated
 - Lasts up to 24 Hours Continuous On
 - 1 Year Warranty

LIGHTING ID CODES

The following chart "Lighting ID Codes" shows the DOT lighting code required to be visible on the light in accordance with SAE Standards.

LIGHTING ID CODES:	
A	Reflex reflector
A2	Reflex reflector for use on vehicles 2032mm or more in overall width
A3	Reflex reflector for conspicuity treatments (CT), for use on vehicles 2032 mm or more in overall width
A4	Reflex reflector for CT (vehicles > 2032mm in width) - 50mm wide [truck/trailer]
A5	Reflex reflector for CT (vehicles > 2032mm in width) - 75mm wide [truck/trailer]
A6	Reflex reflector for CT (vehicles > 2032mm in width) - 100mm wide [truck/trailer]
A7	Reflex reflector for CT (vehicles > 2032mm in width) - 25mm wide [truck/trailer]
C	Motorcycle auxiliary front lamp
D	Motorcycle and moto-driven cycle turn signal lamp
DL	Distributed lighting system (headlamp)
DRL	Daytime running lamp not optically combined with a headlamp low or high beam
E	Side turn signal lamp - vehicles 12m or more in length
E2	Side turn signal lamp - vehicles less than 12m in length
E3	Rear facing side turn signal lamp
E4	Side facing side turn signal lamp
E5	Side direction indicator lamp
EVS1	Siren - interior location
EVS2	Siren - exterior location
EVS3	Siren - under hood location
F	Front fog lamp
F2	Fog tail lamps
F3	Harmonized front fog lamp
G	Truck cargo lamp
H	Sealed beam headlamp
HC	Headlamp center
HG	Discharge forward lighting (headlamp)
HH	Sealed beam headlamp housing
HR	Replaceable bulb headlamp
HL	Light Emitting Diode (LED) headlamp
I	Turn signal lamp spaced greater than 100mm from headlamp
I3	Turn signal lamp spaced from 75mm to less than 100mm from headlamp
I4	Turn signal lamp spaced from 60mm to less than 75mm from headlamp
I5	Turn signal lamp spaced less than 60mm from headlamp
I6	Rear mounted turn signal lamp and front mounted turn signal lamps mounted 100mm or more from the headlamp, for use on vehicles 2032mm or more overall width
I7	Front mounted turn signal lamp mounted less than 100mm from the headlamp, for use on vehicles 2032mm or more in overall width
J1690	Flasher
K	Front cornering lamp
K2	Rear cornering lamp

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

LIGHTING ID CODES

LIGHTING ID CODES (CONTINUED)

L	License plate lamp
M	Motorcycle and motor-driven cycle headlamp - motorcycle type
N	Motorcycle and motor-driven cycle headlamp - moto-driven cycle type
O	Spot lamp
P	Parking lamp
P2	Sidemarkers lamp for use on vehicles 2032mm or less in overall width
P3	Clearance, sidemarkers and identification lamp for use on vehicles 2032mm or more in overall width
PC2	Combination clearance and sidemarkers lamp for use on vehicles 2032mm in width or more in overall width
Q	Turn signal operating unit - Class A
QB	Turn signal operating unit - Class B
QC	Vehicular hazard warning signal operating unit
QD1	Turn signal operating unit for use vehicles 2032mm in width or more in overall width - Type 1
QD2	Turn signal operating unit for use vehicles 2032mm in width or more in overall width - Type 2
QE1	Hazard warning operating unit for use on vehicles 2032mm in width or more in overall width - Type 1
QE2	Hazard warning operating unit for use on vehicles 2032mm in width or more in overall width - Type 2
R	Reversing (back-up) lamp
S	Stop lamp
S2	Stop lamp for use on vehicles 2032mm or more in overall width
T	Tail lamp (rear position lamp)
T2	Tail lamp (rear position lamp) for use on vehicles 2032mm or more in overall width
U	Supplemental high-mounted stop and turn signal lamp
U2	High-mounted stop lamp for use on vehicles 2032mm or more in overall width
U3	Center high-mounted stop lamp for passenger cars, light trucks and MPV's
W	Warning lamp for emergency, maintenance and service vehicles
W-1	Directional warning device - Class 1
W-2	Directional warning device - Class 2
W-3	Directional warning device - Class 3
W2	Warning lamp for school buses
W3-1	Optical warning device - Class 1
W3-2	Optical warning device - Class 2
W3-3	Optical warning device - Class 3
W4	Emergency warning device [triangular shape]
WS3-1	Selective coverage warning device - Class 1S
WS3-2	Selective coverage warning device - Class 2S
WS3-3	Selective coverage warning device - Class 3S
W6	School bus stop arm lamp
X	Adaptive [forward] lighting system
Y	Auxiliary high beam lamp
Z	Auxiliary low beam lamp

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

PART NUMBER PAGE REFERENCE

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

PART NUMBER	PAGE
HDI-DISP-16	116
HDI-DISP-20	116
HDI-DISP-8	116
HDI-DISP-9	116
LCL-3BL	43
LCL-3CL	43
LCL-3R	43
LED-300R	45
M09100ABS	97
M09100R	97
M09100RCL	97
M09100R-DV	97
M09100R-KIT	97
M09100Y	97
M09100YCL	97
M09100Y-DV	97
M09100Y-KIT	97
M09105R	97
M09105Y	97
M09300BCL	44
M09300G	44
M09300R	95
M09300R-3	107
M09300RAS	78
M09300RAS-XBC	78
M09300RCL	95
M09300R-DV	95
M09300R-X	95
M09300R-XBC	95
M09300WCL	44
M09300Y	95
M09300YAT	78
M09300YAT-X	78
M09300YAT-XBC	78
M09300YCL	95
M09300Y-DV	95
M09300Y-X	95
M09300Y-XBC	95
M09330R-X	94
M09330R-XBC	94
M09330WCL-X	44
M09330Y-X	94
M09330Y-XBC	94
M09340RBL-DC	95
M09340RG-DC	95
M09340RP-DC	95
M09340RW-DC	95
M09340YBL-DC	95
M09340YG-DC	95
M09340YP-DC	95

PART NUMBER	PAGE
M09340YR-DC	95
M09340YW-DC	95
M09360BCL	44
M09360WCL	44
M09370Y	62
M09370YCL	62
M09400BCL	45
M09400G	45
M09400R	96
M09400RCL	96
M09400RCL-X	96
M09400R-X	96
M09400WCL	45
M09400Y	96
M09400YCL	96
M09400YCL-X	96
M09400Y-X	96
M09400Y-XBC	96
M09410R	96
M09410RAS-X	78
M09410R-RM3	107
M09410R-X	96
M09410WCL	45
M09410Y	96
M09410Y-X	96
M09411R-X	96
M09411Y-X	96
M09450RCL-DC	94
M09450RWCL-DC	94
M09450RYCL-DC	94
M09450YCL-DC	94
M09450YWCL-DC	94
M11201R	98
M11201Y	98
M11256R	99
M11256Y	99
M11260R-X	99
M11260Y-X	99
M11300R	98
M11300RCL	98
M11300R-DV	98
M11300R-KIT	98
M11300WCL-A	43
M11300WCL-AX	43
M11300Y	98
M11300YAT	78
M11300YCL	98
M11300Y-DV	98
M11300Y-KIT	98
M16280ABS	98

PART NUMBER	PAGE
M16280R	98
M16280RCL	98
M16280RCL-X	98
M16280R-X	98
M16280Y	98
M16280YCL	98
M16280YCL-X	98
M16280Y-X	98
M17011Y	105
M17011YCL	105
M17100R-DV	104
M17100Y-DV	104
M17100YDV-X	104
M17210Y	103
M17210YCL	103
M17300RWCL-DC	93
M17300YWCL-DC	93
M17400R	99
M17400RCL	99
M17400Y	99
M17400YCL	99
M20311R	105
M20311Y	105
M20320R	100
M20320Y	100
M20323R	106
M20325	115
M20326	115
M20327	115
M20328	115
M20330R	103
M20330Y	103
M20332R	101
M20332R-BLK	101
M20332Y	101
M20332Y-BLK	101
M20332YCL	101
M20340R	100
M20340Y	100
M20341R	100
M20341RCL	100
M20341Y	100
M20341YCL	100
M20342R-JX	100
M20342Y-JX	100
M20343R	106
M20350R	100
M20350RCL	100
M20350RY	100
M20350Y	100

PART NUMBER	PAGE
M20350YCL	100
M20355	115
M20356	115
M20357	115
M20358	115
M20361RCL	105
M20361Y	105
M20383RCL	59
M20383WCL	59
M20383YCL	59
M20383YCL-X	59
M20384BRCL	59
M20384BWCL	59
M20384GYCL	59
M20384RCL	59
M20384RWCL	59
M20384WCL	59
M20384WYCL	59
M20384YCL	59
M20384YCL-X	59
M20388YCL	60
M20389BRCL-DC	57
M20389BYCL-DC	57
M20389GWCL-DC	57
M20389GYCL-DC	57
M20389RWCL-DC	57
M20389YCL	57
M20389YWCL	57
M20389YWCL-DC	57
M20395R	103
M20395Y	103
M20400Y	55
M20401Y	55
M20484BCL	58
M20484BRCL	58
M20484BYCL-DC	58
M20484GWCL-DC	58
M20484GYCL	58
M20484GYCL-DC	58
M20484RCL	58
M20484RWCL	58
M20484RWCL-DC	58
M20484RYCL-DC	58
M20484WCL	58
M20484YCL	58
M20484YWCL	58
M20484YWCL-DC	58
M20486YCL	51
M20486YWCL	51
M20487YCL	50

PART NUMBER PAGE REFERENCE

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

PART NUMBER	PAGE
M20487YWCL	50
M20488BYCL-DC	50
M20488GYCL-DC	50
M20488YCL	50
M20488YWCL	50
M20489YSL	51
M20494BYW-TC	56
M20494RBYW-QC	56
M20494RGY-TC	56
M20494RGYW-QC	56
M20494RWB-TC	56
M20494RYW-TC	56
M20494YGW-TC	56
M20495YCL	56
M20560	48
M20561	47
M20562BY	47
M20563R	47
M23015R	101
M23015RCL	101
M23015R-DV	101
M23015R-X	101
M23015Y	101
M23015YCL	101
M23015Y-DV	101
M23015Y-X	101
M23025RB-DC	93
M23025RW-DC	93
M23025RW-DCDV	93
M23025YB-DC	93
M23025YW-DC	93
M23025YW-DCDV	93
M25100L	83
M25100L-X	83
M25102LBLK-X	83
M25102LCH-X	83
M25200L	84
M25200L-X	84
M25201L	84
M25201L-X	84
M25202L-X	84
M25210L-X	84
M25220L	85
M25301L	85
M25301L-X	85
M25302L	85
M25302L-X	85
M25930L	85
M27340R	102
M27340Y	102

PART NUMBER	PAGE
M34260R	97
M34260RCL	97
M34260R-X	97
M34260Y	97
M34260YCL	97
M34260Y-X	97
M36180R	102
M36180RCL	102
M36180Y	102
M36180YCL	102
M42100R	72
M42206	43, 80
M42206-ADHESIVE	43, 78, 80, 89
M42206R	78
M42206RDF-X	78
M42206R-X	78
M42206-X	43
M42206Y	89
M42206Y-X	89
M42213-A	82
M42213R-A	76
M42213RCL-A	76
M42213Y-A	89
M42213YCL-A	89
M42214	82
M42215	82
M42215R	76
M42220	77
M42221	77
M42222	77
M42223L	77
M42228L	77
M42320R	72
M42321-A	79
M42321R	71
M42321Y	87
M42322R	71
M42322RCL	71
M42322RCLDF	71
M42322RDF	71
M42322RDF-X	71
M42322R-DV	71
M42322R-DVDF	71
M42322R-X	71
M42323R-A	73
M42324-A	79
M42324-ADF	79
M42324-ADFX	79
M42324-ADV	79

PART NUMBER	PAGE
M42324A-KIT	79
M42324-AX	79
M42339Y	87
M42339YCL	87
M42339YDF	87
M42341R/Y	90
M42341RYCL	90
M42341Y/Y	90
M42344R	71
M42344R-X	71
M42346R	71
M42346RBU-KIT	71
M42346R-KIT	71
M42346R-X	71
M42347	79
M42347-X	79
M42348	79
M42348-X	79
M42349	79
M42354R-X	73
M42354-X	80
M42354Y-X	87
M42356-X	80
M42358RDF-MH	70
M42358R-MH	70
M42360R/Y-A	90
M42361R/Y-A	90
M42362R/Y-A	90
M42362RYCL-A	90
M42363R/Y-A	90
M42363RYCL-A	90
M42364Y/Y	90
M42701BCL	61
M42701R	61
M42701Y	61
M42701Y-A	61
M42701YCL-A	61
M42705Y	54
M42710Y-A	52
M42718Y	54
M42720Y	54
M42725Y	53
M42730Y-CA13	52
M42740Y	53
M42741Y	53
M42745Y-CA13	52
M43253	113
M43253CH	113
M43900	113
M49700	113

PART NUMBER	PAGE
M49701-X	113
M49702	113
M49705	113
M50100-B	114
M50100-X	114
M50101-X	114
M50102-X	114
M50103	114
M50105	114
M50112	44, 94, 95, 114
M50112-X	114
M50115	58, 59
M50116	59
M50118	45, 78, 94, 96, 114
M50118-X	114
M50121-A	57, 115
M50125	44, 94, 95, 114
M50126	29
M50130	42
M50132	45, 96, 114
M50133	44, 114
M50135	33
M50137	59
M50138	59
M50140	28
M50141	59
M50142	59
M50143	59
M50146	60, 68, 74, 81, 113
M50147	57
M50149	58
M50153CH	114
M50155	19, 115
M50156	52
M50250	85
M50300-B	114
M50300-X	114
M50303	114
M50305	114
M50310	113
M50311	113
M50313CH	113
M50400-B	113
M50400-X	113
M50405	113
M50412	29
M50600-B	113

PART NUMBER PAGE REFERENCE

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

PART NUMBER	PAGE
M50600-X	113
M50605	113
M50606-X	113
M50607	60, 68, 74, 81, 113
M50608	113
M50700-X	111
M50900	109
M50900-100	111
M50900-X	109
M50901	109
M50903	109
M50904	109
M50905	110
M50908	109
M50909	111
M50910	62, 112
M50911	109
M50911-X	109
M50913	111
M50914	112
M50915	112
M50916	91, 110
M50919	17
M50920	55
M50922	109
M50930	77, 110
M50931	110
M50932	109
M50933	109
M50934	112
M50935	62, 112
M50940	69
M50950	110
M50950A-100	111
M50950A-200	111
M50950-X	110
M50950-X18	110
M50951	110
M50953	110
M50956	111
M50960-100	111
M50960-50	111
M50960-5024	111
M50965-100	111
M50970	48
M56100R-A	72
M63100R	75
M63100Y	88
M63100YDF	88

PART NUMBER	PAGE
M63121Y	91
M63121YDF	91
M63122Y	91
M63123Y	91
M63125RAS-WT	104
M63125RCL-WT	104
M63125R-WT	104
M63125YCL-WT	104
M63125Y-WT	104
M63201BCL	60
M63201BRCL	60
M63201BYCL	60
M63201GYCL	60
M63201R	60
M63201WCL-A	60
M63201Y	60
M63201Y-A	60
M63201YCL	60
M63201YWCL	60
M63201Y-X	60
M63253CH	113
M63318-A	80
M63318R-A	76
M63318R-A-GSKT	76, 80
M63318RCL-A	76
M63318Y-A	89
M63318YCL-A	89
M63319R	76, 106
M63320-A	81
M63320-ACH	81
M63320R-A	74
M63320R-ACH	74
M63320RCL-A	74
M63320Y-A	88
M63322R	75
M63322RCL	75
M63322RDF	75
M63322RDF-X	75
M63322R-X	75
M63323-A	73, 81
M63323R-A	73
M63324-A	81
M63324-ADF	81
M63324-ADFX	81
M63324-AX	81
M63339Y	88
M63339YCL	88
M63339YCLDF	88
M63339YDF	88
M63346R	75

PART NUMBER	PAGE
M63346RDF	75
M63346RDF-X	75
M63346R-KIT	75
M63346R-X	75
M63347-A	81
M63347-ADF	81
M63347-ADFX	81
M63347-AX	81
M63348RDF-MH	70
M63348R-MH	70
M63350	81
M63350R	74
M63350R-X	74
M63350-TAPE	68, 74, 81
M63350-X	81
M63350Y-A	88
M63350Y-AX	88
M63351R-X	74
M63351Y-X	88
M63352R-X	74
M63352-X	81
M63353R	61
M63353WYCL	61
M63353Y	61
M63353YCL	61
M63353YGCL-A	61
M63354-HYB	68
M63354R	74
M72270R	102
M72270RCL	102
M72270Y	102
M72270YCL	102
M84400	36
M84403-A-D	39
M84404-A	39
M84405-C	31
M84406-C	31
M84406PIR-ADX	31
M84406PIR-AX	31
M84407-C	34
M84411-C	36
M84415-B	37
M84419-E	24
M84419-E-X	24
M84420-E	24
M84420-E-X	24
M84420YWCL-DC	24, 55
M84421-E	24
M84421-E-X	24
M84422-E	24

PART NUMBER	PAGE
M84422-E-X	24
M84424-B	39
M84426	36
M84426-SW	36
M84427-B	34
M84427-BX	34
M84427-PIR	34
M84427-SW	34
M844280-A-D	39
M844280B-CH	39
M844282-A	39
M84434-A	32
M84434RW-A	32
M84435-A	32
M84435-AX	32
M84436	33
M84441	33
M84441-X	33
M84443	31
M84444-A	37
M84445-E	24
M84445-E-X	24
M84446BLK	34
M84448	33
M84449	33
M84450	38
M84451	38
M84452	38
M84453	38
M84454	38
M84455	37
M84456-D	38
M84457-D	38
M84458-D	38
M84459-D	38
M84460-D	38
M84461	35
M84461-PIR	35
M84462	28, 35
M84463	35
M84463-PIR	35
M84464	28, 35
M84492-DX	25
M85401R	69
M85417R	67
M85417R-KIT	67
M85417R-X	67
M85427R-YCL	66
M85437R-WL	67
M85601R	69

PART NUMBER PAGE REFERENCE

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

PART NUMBER	PAGE
M85620R	68
M85621R	69
M85623R	68
M85801R	67
M85801RCL	67
M85801R-X	67
M90061R	86
M90070R	86
M90070Y	86
M90081Y	86
M90450	86
M95097	63
M95102	63
M95107	63
M95822	63
M96097	63
M97097	63
M97107	63
M97822	63
M98097	64
M98102	64
M99112	64
M99872	64
MAX-TAG	119
MAXXIMA BANNER	119
MB-91	119
MB-95	119
MEP-1000	118
MF-46	120
MF-47	120
MF-49-KIT	120
MFL-200SY	9
MFL-200W	9
MHL-05HILO	7
MHL-90MMHI	8
MHL-90MMHILO	8
MHL-90MMLO	8
MHLE-07HILO	7
MHLE-07HILO-MH	5
MHLE-4X6DRL	6
MHLE-4X6HI-A	6
MHLE-4X6HI-MH	5
MHLE-4X6LO-A	6
MHLE-4X6LO-MH	5
MHLE-5X7HILO	7
MHLE-5X7HILO-MH	5
MLS-1015-AD	42
MLS-1827-A	42
MLS-1827-A-SW	41
MLS-1827-A-X	42

PART NUMBER	PAGE
MLS-1827BL	42
MLS-1827R	42
MLS-1827WW-A	42
MLS-1827Y	42
MLS-196300R-MC	42
MLS-2436-A	42
MLS-2436-A-SW	41
MLS-2436-A-X	41
MLS-2436BL	42
MLS-2436R	42
MLS-2436WW-A	42
MLS-2436Y	42
MLS-3654-A	42
MLS-3654-A-X	42
MLS-3654BL	42
MLS-3654R	42
MLS-3654WW-A	42
MLS-3654WYCL	42
MLS-3654Y	42
MLS-4569-A	42
MLS-4569-A-SW	41
MLS-4569-A-X	41
MLS-76114W-MC	42
MLS-78120-AD	42
MLS-92141W-MC	42
MLS-96147R-MC	42
MLS-96147W-MC	42
MLS-C18	40
MLS-C24	40
MLS-C36	40
MLS-C36BL	40
MLS-C36R	40
MLS-C36Y	40
MLS-C45	40
MLS-D24144-X	41
MPWL-101L	118
MPWL-151L	118
MPWL-S100L	118
MPWL-S40L	118
MRD-1	116
MRH-11	29
MRP-20501	49
MRP-20502	49
MRP-20503	49
MRP-20504	49
MRP-20505	49
MRP-20506	49
MRP-20507	49
MRP-20508	49
MRP-20509	49

PART NUMBER	PAGE
MRP-20510	49
MRP-20511	49
MRP-20512	49
MRP-20513	49
MRP-20514	49
MRP-20515	49
MSL-202000F	117
MSL-202500C	117
MSL-205000F	117
MSL-404400F	117
MSL-404600SC	117
MSL-404800C	117
MSLS-1218	41
MSLS-1827	41
MSLS-1827-DT04	41
MSLS-1827-X	41
MSLS-196300R	41
MSLS-196300Y	41
MSLS-2436	41
MSLS-2436-DT04	41
MSLS-2436R	41
MSLS-2436-X	41
MSLS-3654	41
MSLS-3654-DT04	41
MSLS-3654-X	41
MSLS-4569	41
MSLS-4569-X	41
MSLS-78120	41
MSLS-96147R	41
MSPHL-20DRL-MH	9
MTBL-10-A	23
MTBL-UBAR	23
MWBL-1-B	23
MWL-01B	21
MWL-01GUARD	21
MWL-04	21
MWL-12	29
MWL-13-A	29
MWL-14-A	29
MWL-16-A	17
MWL-19-B	13
MWL-19B-MH	12
MWL-19BY-MH	12
MWL-20-A	20
MWL-20-AD	20
MWL-21	21
MWL-26-B	13
MWL-28	14
MWL-29	14
MWL-30	15

PART NUMBER	PAGE
MWL-32-A	27
MWL-32-ACH	27
MWL-32-YWCL	27
MWL-33	28
MWL-34	28
MWL-35	28
MWL-36-A	25
MWL-38-A	13
MWL-39-A	14
MWL-41	15
MWL-42	16
MWL-42WYCL-DC	16
MWL-42Y-MH	12
MWL-43	15
MWL-45-A	20
MWL-47	22
MWL-48	22
MWL-500	19
MWL-501	19
MWL-50-A	17
MWL-510	19
MWL-511	19
MWL-51LS	26
MWL-52	26
MWL-520	19
MWL-521	19
MWL-57-A	17
MWL-61-A	18
MWL-62-A	18
MWL-63-X	29
MWL-64	18
MWL-65	26
MWL-66	26
MWL-70	20
PLB-630-A	8

LIMITED WARRANTY

Maxxima extends a limited warranty to the original purchaser that Maxxima products are free from defects in materials and workmanship. Maxxima will replace any warranted product to the original consumer/purchaser if the product fails because of defects due to workmanship or materials within the warranty period, as stated in this catalog under the specific model number. This warranty does not constitute a product guarantee and Maxxima does not assume any obligation beyond sending a free replacement product.

The Limited Warranty does not apply to severe applications such as off-road vehicles and construction equipment. These examples are not all inclusive of such excluded applications.

Corrosive chemicals, petroleum products, and harsh cleaners are incompatible with Maxxima lights and their use will void this limited warranty.

The Limited Warranty is not transferable and applies to the original installation of the Maxxima lights for the warranty period.

Under no circumstances will Maxxima be liable for incidental, consequential or punitive damages whether or not the product is covered by this limited warranty.

MISUSE & IMPROPER WIRING OR GROUNDING

Maxxima lights are designed to operate in standard Stop/Tail/Turn, and Park/Turn modes only. Any attempt to rewire the lights to operate in high intensity mode (Stop or Turn mode), for prolonged use, will result in overheating and damage to the product and will void this limited warranty.

Failure to properly ground Maxxima lights, improperly wiring such lights, or any other misuse, abuse or unauthorized use of Maxxima products will void this limited warranty.

PRODUCT REPLACEMENT INSTRUCTIONS

Please contact your local Maxxima Sales Representative or call Maxxima Customer Service at 631-434-1200, fax to 631-434-1457, or email returns@maxxima.com for instructions and a Return Goods Authorization (RGA) number.

TECHNICAL SPECIFICATIONS

ALL PRODUCTS/SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Maxxima will constantly strive to improve the Quality, Reliability, Function, and Design of our products.

<i>Amp Draw Tolerance</i>	<i>± 10%</i>
<i>Lumen Output Tolerance</i>	<i>± 15%</i>



Scan to download
PDF copy



125 CABOT COURT, HAUPPAUGE, NY 11788 USA

TEL: 631.434.1200 1.866.MAXXIMA

FAX: 631.434.1457 INFO@MAXXIMA.COM

WWW.MAXXIMA.COM