

 **Maxxima®**

MEMBER OF




NEW PRODUCTS

JANUARY 1ST, 2024



42 NEW PRODUCTS



SHARE YOUR PHOTOS
ON FACEBOOK OR INSTAGRAM USING  **@MAXXIMA**

PANOR CORP/MAXXIMA

125 Cabot Court, Hauppauge, NY 11788 USA

Tel: 631.434.1200 | 1.866.MAXXIMA | Fax: 631.434.1457

info@maxxima.com | www.maxxima.com

    / maxxima

LED WORK LIGHTS

NEW

90-DEGREE LED SURFACE MOUNT WORK LIGHT



The MWL-52 and MWL-51LS are surface mount exterior work lights designed to attach to a flat surface and illuminate the area directly above, below or to the side of the light. They feature high output LEDs and a coated black housing (MWL-52) or a silver coated housing (MWL-51LS). These lights feature an aluminum housing and polycarbonate lens and are backed by a 5-year warranty.



MWL-52 Black Housing
2,500 Lumens




MWL-51LS Silver Housing
1,500 Lumens




90-Degree Off-Axis Lighting



Side View



Includes Mounting Gasket



Includes Optional Stand-Off Bracket



Excellent for Ground Illumination

PART NUMBER	DESCRIPTION		
MWL-51LS	11" x 2" Work Light 90-Degree, Silver Housing – 1,500 Lumens		
MWL-52	11" x 2" Work Light 90-Degree, Black Housing – 2,500 Lumens		
SPECIFICATIONS	MWL-51LS	MWL-52	FEATURES
Lumens	1,500	2,500	• 90-Degree Lighting • 1,500 Lumen (-51LS) / 2,500 Lumen (-52) • 12/24VDC Dual Voltage • Includes Gasket and Stand-Off Bracket • Polycarbonate Lens & Aluminum Housing • Retail Packaging • 5 Year Warranty
Voltage	12/24VDC	12/24VDC	
Amp Draw	1.8A 12V / 0.9A 24V	2.4A 12V / 1.2 24V	
Dimensions	10.7" W x 1.6" H x 1.8" D	10.7" W x 1.6" H x 1.8" D	
Mounting	2 Hole Surface, 10" C to C	2 Hole Surface, 10" C to C	
Connector	2 Leads Blunt Cut, 11"	2 Leads Blunt Cut, 11"	
LEDs	8	8	

NEW

8,500 LUMENS MaxxBright SQUARE LED WORK LIGHT



DT Pigtail Included

PART NUMBER	DESCRIPTION
MWL-500	Square <i>MaxxBright</i> Work Light 8,500 Lumens Black Housing
MWL-501	Square <i>MaxxBright</i> Work Light 8,500 Lumens White Housing
SPECIFICATIONS	
Lumens	8,500
Voltage	12/24VDC Dual Voltage
Amp Draw	8.0A 12V / 4.0A 24V
Dimensions	5.8" W x 4.7" H x 3.5" D 5.3" Overall H w/ Brkt.
Mounting	3 Bolts: 2 M8, 1 M10
Connector	Integrated Deutsch-style DT04, Includes DT06 Pigtail, 19"
LEDs	12
FEATURES	
• <i>MaxxBright</i> High Powered Work Light • 8,500 Lm Flood Beam / Scene Light • Available in Black or White Housing • Water-Tight Deutsch-Style Connector • Mating Pigtail Connector Included • Extra Heavy Duty Bail Mount Bracket • 5 Year Warranty	

NEW

9,500 LUMENS MaxxBright ROUND LED WORK LIGHT



DT Pigtail Included

PART NUMBER	DESCRIPTION
MWL-510	Round <i>MaxxBright</i> Work Light 9,500 Lumens Black Housing
MWL-511	Round <i>MaxxBright</i> Work Light 9,500 Lumens White Housing
SPECIFICATIONS	
Lumens	9,500
Voltage	12/24VDC Dual Voltage
Amp Draw	8.0A 12V / 4.0A 24V
Dimensions	6" Diam. x 3.5" D 6.7" Overall H w/ Brkt.
Mounting	3 Bolts: 2 M8, 1 M10
Connector	Integrated Deutsch-style DT04, Includes DT06 Pigtail, 19"
LEDs	14

FEATURES	
	• <i>MaxxBright</i> High Powered Work Light • 9,500 Lm Flood Beam / Scene Light • Available in Black or White Housing • Water-Tight Deutsch-Style Connector • Mating Pigtail Connector Included • Extra Heavy Duty Bail Mount Bracket • 5 Year Warranty

NEW

19,000 LUMENS MaxxBright RECTANGULAR LED WORK LIGHT



DTP Pigtail Included

PART NUMBER	DESCRIPTION	
MWL-520	Rectangle <i>MaxxBright</i> Work Light 19,000 Lumens Black Housing	
MWL-521	Rectangle <i>MaxxBright</i> Work Light 19,000 Lumens White Housing	
SPECIFICATIONS		FEATURES
Lumens	19,000	• <i>MaxxBright</i> High Powered Work Light
Voltage	12/24VDC Dual Voltage	• 19,000 Lm Flood Beam / Scene Light
Amp Draw	17.5A 12V / 8.7A 24V	• Available in Black or White Housing
Dimensions	13" W x 4.3" H x 3.5" D 4.9" Overall H w/ Brkt.	• Water-Tight Deutsch-Style Connector • Mating Pigtail Connector Included
Mounting	3 Bolts: 2 M10, 1 M12	• Extra Heavy Duty Bail Mount Bracket
Connector	DTP04-Style on 12" Cable Includes DTP06 Pigtail, 7.5"	• 5 Year Warranty
LEDs	29	

LED INTERIOR LIGHTS

NEW

8" ROUND FLUSH MOUNT 1,400 / 300 LUMENS LED DOME LIGHTS



NEW

PART NUMBER	DESCRIPTION
M84448	8" Dome Light, 1,400 Lumens
M84449	8" Dome Light, 1,400 Lumens, 3 CCT, Brushed Nickel
SPECIFICATIONS	
Lumens	1,400 HI / 300 LO
Voltage	12.8VDC
Amp Draw	1.0A / 0.2A
Dimensions	8.6" Diam x 0.56" D
Mounting	4 Hole Flush, 8" Bolt Circle, 7.3" Cutout
Connector	3 Pin, Rectangular AMP-Style Mate-N-Lock Connector, 7" Lead
LEDs	51 (M84448) 102 (M84449)
FEATURES	
• HI/LO – 1,400 / 300 Lumens • Direct Replacement for Many Popular Ambulance Lights • 3 Discrete Wires for HI/LO Switch • Available in White or Alum. Flange • M84449: 3-pos. CCT Switch, Selectable Color Temp. 3,000K, 4,000K, 5,000K • Universal 8" Bolt Pattern • Frosted Lens – No Hot Spots • Polycarbonate Lens • Aluminum Housing • 5 Year Warranty	

NEW

45 DEGREE ANGLED LED RIGID LINEAR STRIP LIGHTS



45 Degree Light Output

PART NUMBER	DESCRIPTION				
M84456-D	45 Degree Low Profile Rigid White Linear Interior Strip Light 12"				
M84457-D	45 Degree Low Profile Rigid White Linear Interior Strip Light 18"				
M84458-D	45 Degree Low Profile Rigid White Linear Interior Strip Light 24"				
M84459-D	45 Degree Low Profile Rigid White Linear Interior Strip Light 36"				
M84460-D	45 Degree Low Profile Rigid White Linear Interior Strip Light 48"				
PART NUMBER	M84456-D	M84457-D	M84458-D	M84459-D	M84460-D
SPECIFICATIONS	12" STRIP	18" STRIP	24" STRIP	36" STRIP	48" STRIP
Lumens	600	800	1,100	1,600	2,000
Voltage	12.8VDC	12.8VDC	12.8VDC	12.8VDC	12.8VDC
Amp Draw	0.6A	0.8A	1.2A	1.7A	2.0A
Length	13.4" L	19" L	25.3" L	37.1" L	48.4" L
W x D	0.6" W x 0.6" H	0.6" W x 0.6" H	0.6" W x 0.6" H	0.6" W x 0.6" H	0.6" W x 0.6" H
Mounting	3M Tape	3M Tape	3M Tape	3M Tape	3M Tape
Connector	DT04, 3.8"	DT04, 3.8"	DT04, 3.8"	DT04, 3.8"	DT04, 3.8"
LEDs	36	48	72	111	144


FEATURES

- Corner-Mounted Rigid LED Strip Lights Or Under-Shelf Mounted
- 3M Tape Included, Not Attached Can Be Applied to One Side or Both
- Deutsch-Style DT04 Connector
- Frosted Lens with Wide Beam Angle
- ABS Body, Polycarbonate Lens, Aluminum Base
- 5 Year Warranty

LED INTERIOR LIGHTS

NEW

2" X 2-3/4" 450 LUMENS FORD TRANSIT REPLACEMENT LED DOME LIGHT

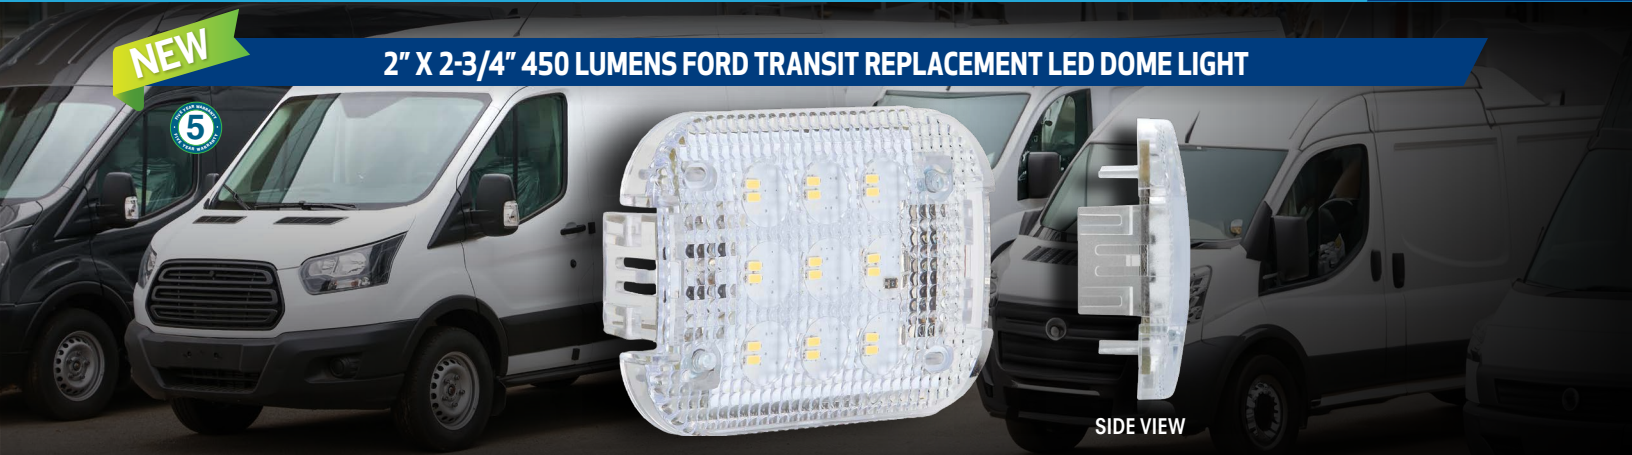

SIDE VIEW

PART NUMBER	DESCRIPTION
M84455	2" x 2-3/4" Dome Light Ford Transit Replacement
SPECIFICATIONS	FEATURES
Lumens	450
Voltage	12.8VDC
Amp Draw	0.4A
Dimensions	2.8" L x 2" W x 1.1" D
Mounting	Snap-In, 2.4" x 1.3" Cutout
Connector	2 Spade Connectors, 0.25"
LEDs	18
	• Direct Replacement for Ford Transit or Similar • 450 Lumens • Easy Snap-In Mount • Polycarbonate Lens & Aluminum Heat Sink • 5 Year Warranty

NEW

MLS-SERIES FLEXIBLE PVC JACKETED LED STRIP LIGHTS



DT-STYLE CONNECTOR



MOUNTING KIT INCLUDED

PART NUMBER	DESCRIPTION
MLS-1015-AD	White LED Adhesive Strip Light 10" – DT Connector
SPECIFICATIONS	FEATURES
Lumens	260
Voltage	12.8VDC
Amp Draw	0.35A
Dimensions	10" L x 0.5" W x 0.2" D
Mounting	3M Adhesive Tape
Connector	Deutsch DT04, 10"
LEDs	15
	• 10" Flexible Light Strip • PVC Outer Jacket • Wire Strain Relief • Deutsch DT04 Connector • 5 Year Warranty — 2 Year Warranty if Applied to Exterior Surfaces

NEW

M84407-C 3" X 6" INTERIOR LIGHT — 275 LUMENS

5 YEAR WARRANTY



PART NUMBER	DESCRIPTION
M84407-C	3" x 6" Rectangular Dome Light 275 Lumens
SPECIFICATIONS	FEATURES
Lumens	275
Voltage	12.8VDC
Amp Draw	230mA
Dimensions	5.8" W x 2.9" H x 1.0" D
Mounting	2 Holes, 4.7" C to C
Connector	2 Leads Blunt Cut, 9"
LEDs	14
	• Refrigeration/Moisture Safe • Notched Base for Wire Exit • Polycarbonate Frosted Lens • Polycarbonate Housing • 5 Year Warranty

NEW



15" X 8" MINI LIGHTBAR — CLEAR LENS



M20488YCL Permanent Mount



M20487YCL Mag Mount



M20488YWCL Permanent Mount




M20487YWCL Mag Mount



M20488GYCL-DC DUAL COLOR GREEN / AMBER - Permanent Mount

M20488-Series Permanent Mount Options

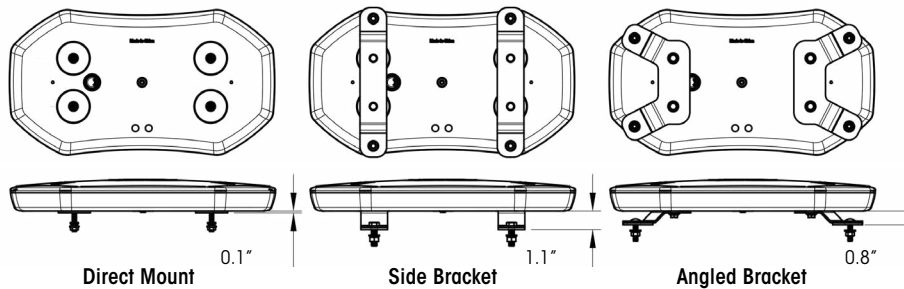

PART NUMBER	DESCRIPTION
M20487YCL	Warning Minibar, Amber Clear Lens, Mag Mount
M20487YWCL	Warning Minibar, Amber / White Clear Lens, Mag Mount
M20488YCL	Warning Minibar, Amber Clear Lens, Permanent Mount
NEW M20488YWCL	Warning Minibar, Amber / White Clear Lens, Permanent Mount
NEW M20488GYCL-DC	Warning Minibar, Amber / Green Clear Lens, Permanent Mount – Dual Color

SPECIFICATIONS	FEATURES
Voltage	12/24VDC
Amp Draw	4.0A 12V / 2.0A 24V
Dimensions	15.4" L x 8.5" W x 2.2" H
Mounting	
- M20487	Mag Mount
- M20488	4 Hole Surface
Connector	
- M20487	Cig. Plug, 15 ft
- M20488	3 Wire Blunt Cut, 15"
LEDs	80 (160 GYCL-DC)
Legal Heading	W3-1
SAE	J845 Class 1A, CA 13

- 18 Selectable Flash Patterns
- SAE Class 1 & CA 13 Compliant
- Available in All-Amber with Clear Lens or Amber/White Split Color with Clear Lens
- GYCL-DC Green/Amber Model Dual Color (Lights All Green and/or All Amber)
- M20488-Series Includes 3 Mounting Options: Direct Mount, Side Bracket, and Angled Bracket
- Polycarbonate Lens & Housing
- Low Profile Design
- Retail Packaging
- 5 Year Warranty


NEW

LOW-PROFILE LED SURFACE MOUNT WARNING — TRI COLOR MODELS — 18 LEDs



With Black Bezel (Included)

Available in
5 Different Models /
Color Combinations



PART NUMBER	DESCRIPTION
M20494YGW-TC	Amber / Green / White Tri Color
M20494RGY-TC	Red / Green / Amber Tri Color
M20494RYW-TC	Red / Amber / White Tri Color
M20494RWB-TC	Red / White / Blue Tri Color
M20494BYW-TC	Blue / Amber / White Tri Color

SPECIFICATIONS	FEATURES
Voltage	12/24VDC
Amp Draw	0.8A 12VDC / 0.4A 24VDC
Dimensions	
- Light Only	5.6" W x 1.6" H x 0.5" D
- With Bezel	5.9" W x 1.6" H x 0.5" D
Mounting	2 Hole Surface, 4.7" C to C
Connector	5 Leads Blunt Cut, 7"
LEDs	18
Legal Heading	W-1
SAE	J595 Class 1 CA13

- Available in 5 Models / Color Combinations
- Each Model Includes 3 Colors in One Light
- Each Color Fills The Whole Light
- 28 Selectable Flash Patterns
- 7 Selectable Flash Color Options
- Up to 11 Programmable "Modes"
- Programmable Dim Feature Available
- Synchronized & Alternating Patterns
- Class 1 & CA Title 13
- Polycarbonate Lens & Aluminum Housing
- Low Profile Design
- 5 Year Warranty

NEW

LOW-PROFILE LED SURFACE MOUNT WARNING — QUAD COLOR MODELS — 24 LEDs



With Black Bezel (Included)

Available in
2 Different Models /
Color Combinations



PART NUMBER	DESCRIPTION
M20494RBYW-QC	Red / Blue / Amber / White Quad Color
M20494RGYW-QC	Red / Green / Amber / White Quad Color

SPECIFICATIONS	FEATURES
Voltage	12/24VDC
Amp Draw	0.8A 12VDC / 0.4A 24VDC
Dimensions	
- Light Only	5.6" W x 1.6" H x 0.5" D
- With Bezel	5.9" W x 1.6" H x 0.5" D
Mounting	2 Hole Surface, 4.7" C to C
Connector	5 Leads Blunt Cut, 7"
LEDs	24
Legal Heading	W-1
SAE	J595 Class 1 CA13

- Available in 2 Models / Color Combinations
- Each Model Includes 4 Colors in One Light
- Each Color Fills The Whole Light
- 28 Selectable Flash Patterns
- 15 Selectable Flash Color Options
- Up to 11 Programmable "Modes"
- Programmable Dim Feature Available
- Synchronized & Alternating Patterns
- Class 1 & CA Title 13
- Polycarbonate Lens & Aluminum Housing
- Low Profile Design
- 5 Year Warranty

NEW

180-DEGREE SURFACE MOUNT WARNING — AMBER CLEAR LENS



PART NUMBER	DESCRIPTION
M20495YCL	180-Degree Warning Light

SPECIFICATIONS	FEATURES
Voltage	12/24VDC
Amp Draw	1.0A 12VDC / 0.5A 24VDC
Dimensions	
- Light Only	3.5" W x 1.4" H x 1.4" D
- With Bracket	4.3" W x 2.4" H x 3.2" D
Mounting	2 Hole Surface, 3.1" C to C
Connector	4 Leads Blunt Cut, 15"
LEDs	12
Legal Heading	WS3-1(180°)
SAE	J845 Class 1S

- 21 Selectable Flash Patterns
- SAE J845 Compliant 180-Degrees
- Surface Mount or Bracket Mount
- Optional Swivel Bracket Included
- Polycarbonate Lens & Aluminum Housing
- Sealed Electronics
- 5 Year Warranty

NEW

14" X 5.6" MINI LIGHTBAR — AMBER / SMOKED LENS



Includes Cigarette Plug with on/off and pattern select switches



PART NUMBER	DESCRIPTION
M20489YSL	Amber Smoked Lens Micro Bar, Mag Mount
SPECIFICATIONS	FEATURES
Voltage	12/24VDC • Compact Micro-Bar, SAE Class 1
Amp Draw	5.0A 12V / 3.0A 24V • Amber LEDs / Clear Smoked Lens
Dimensions	14.2" L x 5.6" W x 2.5" H • 26 Programmable Flash Patterns
Mounting	Suction Mag Mount • 72 LEDs
Connector	Cigarette Plug, 15-Foot Cable • High Density LEDs Provides Full Coverage with No Individual LEDs Distinguishable
LEDs	72 • Vacuum Suction Cup / Magnet Mount
Legal Heading	W3-1 • 15-Foot Cable with Cig. Plug
SAE	J845 CLASS 1A • 2 Switches On/Off and Pattern Select • 5 Year Warranty

NEW

6" OVAL COMBINATION MULTI-FUNCTION WARN/BACK-UP & WARN/PARK/TURN



M63201WCL-A



M63201Y-A



PL-3 Connector and Separate Wires for Warning Light

PART NUMBER	DESCRIPTION
M63201WCL-A	6" Oval White Flashing Warning & Back-Up – 12/24VDC
M63201Y-A	6" Oval Amber Flashing Warning & Park/Turn – 12/24VDC
SPECIFICATIONS	
Voltage	12/24VDC
Amp Draw	WCL-A: Max 0.6A 12V Y-A: Max 0.9A 12V
Dimensions	6.3" W x 2.2" H x 1.2" D
Mounting	6" Oval Grommet
Connector	Integrated PL-3 & 2 Wires, 11"
LEDs	24
Legal Heading	R, W2 (M63201WCL-A) P 16 I7, W1 (M63201Y-A)
SAE	J593, J595 (M63201WCL-A) J222, J2261, J595 (M63201Y-A)
FEATURES	
• WCL-A: Combination White Flashing Warning and DOT Compliant Back-Up Lamp	
• Y-A: Combination Amber Flashing Warning and DOT Park/Front/Rear Turn	
• 28 Programmable Flash Patterns	
• 24 LEDs	
• 4 (WCL-A) or 5 (Y-A) Programmable Priority Modes Allows Back-Up / Turn Signal Override, or Warning Override	
• Discrete Wiring – Dedicated Back-Up / Turn Signal Circuit and Warning Circuits	
• 5 Year Warranty	

NEW

4" ROUND COMBINATION AMBER FLASHING WARNING & AMBER PARK/TURN



PART NUMBER	DESCRIPTION	
M42701Y-A	4" Round Amber Flashing Warning & Park/Turn – 12/24VDC	
SPECIFICATIONS		FEATURES
Voltage	12/24VDC	• Combination Amber Flashing Warning and DOT Compliant Park / Front / Rear Turn • 28 Programmable Flash Patterns • 24 LEDs • 5 Programmable Priority Modes Allows Turn Signal Override or Warning Override • Discrete Wiring – Dedicated Park/Turn Circuit and Warning Circuits • 5 Year Warranty
Amp Draw	Max: 0.9A 12V / 0.5A 24V	
Dimensions	4.2" Diam. x 1.6"D	
Mounting	4" Round Grommet	
Connector	Integrated PL-3 & 2 Wires, 11"	
LEDs	24	
Legal Heading	P 16 I7, W1	
SAE	J222, J2261, J595 Class 1	

NEW

4" ROUND STT AND LED B/U KIT



M42740Y

M42741Y

Optional Built In
Pipe Mount



PART NUMBER	DESCRIPTION
M42740Y	Full Size CLASS 1 LED Beacon – Medium Dome, 12 - 48 VDC Multi-Voltage
M42741Y	Full Size CLASS 1 LED Beacon – Tall Dome, 12 - 48 VDC Multi-Voltage

SPECIFICATIONS	FEATURES	
Voltage	12 - 48 VDC Multi-Voltage	• SAE Class 1 LED Warning Beacon
Amp Draw		• Available in Medium Dome (M42740Y)
- M42740Y	1.5A 12V / 0.8A 24V	• or Tall Dome (M42741Y)
- M42741Y	1.8A 12V / 1.0A 24V	• 12 Programmable Flash Patterns
Dimensions		• 12 - 48 VDC Multi-Voltage
- M42740Y	6.4" Diam. x 4.6" H	• Industry Standard 3-Bolt Pattern
- M42741Y	6.4" Diam. x 6.1" H	• Includes 1-1/4" Pipe Mount in Base
Mounting	3 Hole Surface, 6" Bolt Circle	• Polycarbonate Dome & Aluminum Base
Connector	3 Wire Blunt Cut, 12"	• Retail Packaging
LEDs		• 5 Year Warranty
- M42740Y	48	
- M42741Y	60	
Legal Heading	W3-1	
SAE	J845 CLASS 1A	

NEW

4" ROUND STT AND LED B/U KIT



Retail Gift Box

PART NUMBER	DESCRIPTION		
M42346RBU-KIT	4" Kit M42346R STT + M42349 BU		
SPECIFICATIONS		FEATURES	
	M42346R	M42349	
LEDs	6	6	• 4" STT + BU KIT
Voltage	12.8VDC	12.8VDC	• Contains (1) M42346R
Amp Draw	200mA	130mA	and (1) M42349
Dimensions	4.3" Diam.x 1.8" Depth	4.3" Diam.x 1.7" Depth	• Retail Packaging
Mounting	Grommet	Grommet	• 5 Year Warranty
Connector	PL-3	PL-3	
Legal Heading	I6 S2 T2	R	
DOT/SAE	J2040, J2261	J593	



M42346R



M42349

KIT INCLUDES

and



Integrated PL-3 Connectors

LED STOP / TURN / TAIL AND CLEARANCE MARKERS

NEW

5 YEAR WARRANTY

1" X 17" HYBRID COMBINATION STT & BACK-UP



M85801R



M85801RCL



Screws & Caps Included

PART NUMBER	DESCRIPTION
M85801R	1"x 17" Hybrid Combination Stop/Turn/Tail & Back-Up
M85801RCL	1" x 17" Hybrid Combination S/T/T & Back-Up Red Clear Lens
SPECIFICATIONS	
LEDs	27 (11 Red, 16 White)
Voltage	12.8VDC
Amp Draw	0.4A Max
Dimensions	17" L x 1.2" W x 0.5" D
Mounting	2 Hole Surface, 16-1/8" C to C
Connector	4 Leads, Blunt Cut, 12"
Legal Heading	R, I6 S2 T2
DOT/SAE	J593, J2040, J2261
FEATURES	
• Hybrid Combo STT & Back-Up	
• Thin Design – Only 1.2" Wide	
• Horizontal or Vertical Mount	
• Available with Red Lens (R) or Clear Lens (RCL)	
• Mounting Screws and Screw Caps Included	
• Polycarbonate Lens & Housing	
• 5 Year Warranty	

NEW

5 YEAR WARRANTY

2-1/2" CLEAR LENS CLEARANCE MARKER - BULK PACK



PART NUMBER	DESCRIPTION
M16280RCL	2 1/2" Round P2/P3 Red <i>Clear Lens</i> Vantage Series
M16280RCL-X	2 1/2" Round P2/P3 Red <i>Clear Lens</i> Vantage Series – Bulk Pack
M16280YCL	2 1/2" Round P2/P3 Amber <i>Clear Lens</i> Vantage Series
M16280YCL-X	2 1/2" Round P2/P3 Amber <i>Clear Lens</i> Vantage Series – Bulk Pack
SPECIFICATIONS	
LEDs	8
Voltage	12.8VDC
Amp Draw	40mA
Dimensions	2.5" Diam. x 0.8" D
Mounting	Grommet Mount
Connector	PL-10
Legal Heading	P2 P3
SAE	J592 J2042
FEATURES	
• Our Popular M16280-Series Now Available with Clear Lens in OEM Bulk Pack	
• Also Available in Individual Retail Pack	
• Also Available in Red and Amber Lens	
• Fits 2.5" Grommets (M50100-B Sold Separately)	
• Integrated PL-10 (M50950 Sold Separately)	
• Polycarbonate Lens & Housing	
• 5 Year Warranty	

LED STOP / TURN / TAIL

NEW

3" X 5" RECTANGLE RED, WHITE, AMBER, RED CLEAR LENS, & AMBER CLEAR LENS

5 YEAR WARRANTY



M42213R-A

M42213-A

M42213Y-A



M42213RCL-A

M42213YCL-A

NEW

NEW

NEW

PART NUMBER	DESCRIPTION
M42213R-A	Rectangular Red Stop/Turn/Tail
M42213-A	Rectangular White Back Up
M42213Y-A	Rectangular Amber Park/Front/Rear Turn
M42213RCL-A	Rectangular Red Clear Lens Stop/Turn/Tail
M42213YCL-A	Rectangular Amber Clear Lens Park/Front/Rear Turn

SPECIFICATIONS	FEATURES
LEDs 10	• DOT Compliant Horizontal or Vertical • Grommet Mount (M49700 Sold Separately) • Integrated PL-3 3 Pin Connector • Acrylic Lens & Polycarbonate Housing • 5 Year Warranty
Voltage 12.8VDC	
Amp Draw	
- Red 250mA / 20mA	
- White 170mA	
- Amber 320mA / 40mA	
Dimensions 3.4"W x 5.3"H x 1.3"D	
Mounting Rectangle Grommet	
Connector PL-3	
Legal Heading	
- Red I6 S2 T2 P2	
- White R	
- Amber I6 P P2	
DOT/SAE	
- Red J592, J2040, J2261	
- White J593	
- Amber J222, J592, J2042, J2261	

NEW

4" ROUND STT 12 LED — FLANGE MOUNT

5 YEAR WARRANTY



PART NUMBER	DESCRIPTION
M42323R-A	4" Red STT – Flange Mount

SPECIFICATIONS	FEATURES
LEDs 12	• 4" Round STT • Industry Standard Integrated Flange Mount • PL-3 Connector • Polycarbonate Lens & Housing • 5 Year Warranty
Voltage 12.8VDC	
Amp Draw 190mA / 10mA	
Dimensions 5.5" Diam. x 1.7" D	
Mounting 3 Hole Flange, 5" Bolt Circle, 4.5" Hole Cutout	
Connector PL-3	
Legal Heading I6 S2 T2	
DOT/SAE J2040, J2261	

NEW

6" OVAL FLANGE MOUNT — 10 LED

5 YEAR WARRANTY



M63323R-A



M63323-A

PART NUMBER	DESCRIPTION
M63323R-A	Oval Red Stop/Turn/Tail – Flange Mount
M63323-A	Oval Back-Up – Flange Mount

SPECIFICATIONS	FEATURES
LEDs 10	• 6" Oval Stop/Turn/Tail and 6" Oval Back-Up • Industry Standard Integrated Flange Mount • PL-3 Connector • Horizontal or Vertical Mount • Polycarbonate Lens & Housing • 5 Year Warranty
Voltage 12.8VDC	
Amp Draw	
- Red 100mA 10mA	
- White 270mA	
Dimensions 7.8" W x 3.5" H x 0.7" D	
Mounting 2 Hole Flange, 7-1/4"C to C	
Connector 3 Wires, Blunt Cut, 13"	
Legal Heading	
- Red I6 S2 T2	
- White R	
DOT/SAE	
- Red J2040, J2261	
- White J593	



DISTRIBUTED BY:

PANOR CORP/MAXXIMA

125 CABOT COURT, HAUPPAUGE, NY 11788 USA
TEL: 631.434.1200 | 1.866.MAXXIMAFAX: 631.434.1457
INFO@MAXXIMA.COM | WWW.MAXXIMA.COM

T: 631.434.1200 F: 631.434.1457 WWW.MAXXIMA.COM     / MAXXIMA