



 *Maxxima*[®]

OUR MISSION

TO CONQUER DARKNESS, PROVIDE ILLUMINATION AND SAFETY AT ALL TIMES WITH TECHNOLOGICALLY ADVANCED LIGHTING DEVICES.

OUR VALUES

AS A COMPANY WE VALUE

- Our employees and partners
- Innovation, creativity and product quality
- Finding and developing talented individuals
- Honesty, candor, respect and integrity as a guide
- Enthusiasm to deliver outstanding customer service
- A good reputation because if ever destroyed can never be restored, even with substantial financial resources

“Don't judge each day by the harvest you reap but by the seeds you plant.”

- Robert Louis Stevenson

CATALOG TERMS

The following abbreviations are used throughout this catalog

CM	CLEARANCE/MARKER
DRL	DAYTIME RUNNING LIGHT
STT	STOP/TURN/TAIL
PFT	PARK/FRONT TURN
PRT	PARK/REAR TURN
FMVSS	FEDERAL MOTOR VEHICLE SAFETY STANDARD
SAE	SOCIETY OF AUTOMOTIVE ENGINEERS

LED FORWARD LIGHTING

5-6	Snow Plow & Heated Headlights
7	4" x 6" Headlights
8-9	5" x 7", 7" Round, 90MM Headlights
10	DRL and LED Fog Lights

LED WORK LIGHTS

13-20	Work Lights
21-22	Compact, Mini, Low-profile Work Lights
23-24	Work Light Bars, Dual-Color Work Lights
25-28	Scene Lights
29	Surface Mount Work Lights

LED INTERIOR LIGHTS

31-37	Overhead Dome Lights
38-39	Rigid Linear Strip Lights
40-42	Flexible Strip Lights
43-45	Courtesy Lights/Auxiliary Lights

MAXXIMA WARNING & SAFETY

47	Back-Up Alarms
48-49	LED Beacons
50-51	MINI Lightbars
52	Traffic Directors
53-56	Surface Mount Directional Lights
57-58	4" & 6" Flashing Warning Lights
59-60	Micro Warning, Other Warning

LED STOP/TURN/TAIL & BACK-UP & LICENSE LIGHTS

62-65	HYBRID & Patented Multi-Function STT/BU
66	<i>MaxxHeat</i> Heated LED STOP/TURN/TAIL
67-70	4" & 6" STOP/TURN/TAIL
71-74	Rectangular, Box Lights, AUX STT
75-77	Back-Up
78-80	License Lights
81	7" Bus Lights
83-87	Amber Turn Signals

LED CLEARANCE MARKER

89-90	Dual-Color, Dual Function C/M
90-92	3/4" and 1-1/4" Clearance Markers
93-94	2" and 2-1/2" Clearance Markers
95-100	OE-STYLE Clearance Markers
102-103	ID Bars

ACCESSORIES

105-107	Electrical
108-109	Mounting Accessories
110-111	Retail Displays
117-118	Lighting ID Codes

- HEATED HEADLIGHTS
- HEADLIGHTS
- DAYTIME RUNNING LIGHTS
- FOG LIGHTS



LED FORWARD LIGHTING

LED SNOW PLOW HEADLIGHTS

MSPHL-20DRL-SERIES MULTI-FUNCTION HEADLIGHT, TURN SIGNAL, DRL, PARKING LAMP, AND FLASHING WARNING LIGHT



MaxxHeat



Integrated DT04 Deutsch-Style Connector with 8-foot Shielded Cable



2.7" to 3.5" Adjustable Bolts



Dual Color LED Bar
Amber Turn Signal, White DRL, or optional Flashing Warning



100-Degree Adjustable Swivel Bracket
Bottom Mount or Rear Mount

PART NUMBER	DESCRIPTION	SPECIFICATIONS	
MSPHL-20DRL	SNOW PLOW HEADLIGHT	Voltage	12/24VDC
MSPHL-20DRL-MH	SNOW PLOW HEADLIGHT <i>MaxxHeat</i>	Amp Draw	Low Beam 1.2A High Beam 2.2A Heat 4.0A, Max Amp 7.5A (MH Model)
		Dimensions	9.0" W x 6.3" H x 3.7" D
		Connector	Integrated DT04-6P, Includes 8.2 foot shielded 6-conductor cable, DT06-6S x blunt cut
		Mounting	(2) M10 Bolts - Adjustable 2.7" to 3.5" C to C
		LEDs	24 Total (20 Amber/White, and 4 High Power LEDs)
		Legal Heading	DOT VOL SAE HL DRL I5 P W-1
		DOT/SAE	SAE J588, J595, J2087, J2650

FEATURES

- Multi-Function Headlight, Turn Signal, DRL, Parking Lamp, and Flashing Warning
- HI/LO Dual Beam Headlight
- DOT FMVSS108 / CMVSS108 Compliant (All functions)
- Available with *MaxxHeat* Heated Lens, Automatically Activates
- Optional SAE J595 Class 1 Flashing Warning Light
- Integrated Turn Signal and DRL / Park Light
- Universal – Left or Right Mount
- 2-Stub Mount with Adjustable Swivel Bracket
- 8.2 foot Shielded Cable for Easy Install
- 100-degree Swivel Bracket for Bottom-Mount or Rear-Mount
- Visual Aim Compliant
- Weight 5lb 4oz (5lb 5oz – MH Model)
- 3 Year Warranty

MHLE-SERIES 4" X 6" MaxxHeat HEATED HEADLIGHTS



PART NUMBER	DESCRIPTION
MHLE-4X6LO-MH	4" X 6" LOW BEAM MaxxHeat
MHLE-4X6HI-MH	4" X 6" HIGH BEAM MaxxHeat
Voltage	12/24VDC
Amp Draw (at 12.8V)	Heater Off: Low Beam 0.7A High Beam 0.9A Heater On: Low Beam 1.7A High Beam 2.0A
Dimensions	6.6" W x 4.2" H x 3.4" D
Connector	Integrated Male H4 3-Pin or 2-Pin
LEDs	5
Legal Heading	Low DOT L SAE HL / High DOT U SAE HL
DOT*/SAE	J2650

- Heating element is activated when the temperature drops below 45°F (7°C)
- "Heat On" Indicator lights up when heating element is on
- Polycarbonate Housing / Polycarbonate Lens
- MaxxShield Hard Coating with UV Protection
- Mechanical Aiming Pads
- Retrofits ANSI# H4651 (HI), H4656 (LO)
- 3 Year Warranty

MHLE-SERIES 5" X 7" MaxxHeat HEATED HEADLIGHTS



PART NUMBER	DESCRIPTION
MHLE-5X7HILO-MH	5" X 7" HI/LO DUAL BEAM MaxxHeat
MHLE-07HILO-MH	7" ROUND HI/LO DUAL BEAM MaxxHeat
Voltage	12/24VDC
Amp Draw (at 12.8V)	Heater Off: Low Beam 0.8A High Beam 1.6A Heater On: Low Beam 2.9A High Beam 3.7A
Dimensions	7.9" W x 5.6" H x 3.9" D 7.0" Diameter x 3.75" Depth
Connector	Integrated Male H4 3-Pin
LEDs	12
Legal Heading	DOT SAE HL
DOT*/SAE	J2650

- Heating element is activated when the temperature drops below 45°F (7°C)
- "Heat On" Indicator lights up when heating element is on
- Polycarbonate Housing / Polycarbonate Lens
- MaxxShield Hard Coating with UV Protection
- Mechanical Aiming Pads
- MHLE-5X7HILO-MH Retrofits ANSI# 6052, 6053, H6054
- MHLE-07HILO-MH Retrofits ANSI# 6014, 6015, 6016, H6024
- 3 Year Warranty

*All Maxxima headlights are DOT FMVSS108 / CMVSS108 Compliant

GEN2 MHLE-SERIES 4" X 6" POLYCARBONATE DRL / LOW BEAM HEADLIGHT

MHLE-4X6DRL
LOW BEAM & DRL

PART NUMBER	DESCRIPTION
MHLE-4X6DRL	4" X 6" COMBO DRL / LOW BEAM

Voltage	12/24VDC	• Mechanical Aim Compliant
Amp Draw	0.7A 12V / 0.4A 24V	• Visual Aim Compliant
Dimensions	6.6" W x 4.2" H x 3.4" D	• Polycarbonate Lens & Housing
Connector	3-Pin Male H4	• <i>MaxxShield</i> Hard Coating with UV Protection
LEDs	18	• Non-Polarized Pin Out
Legal Heading	DOT L VOL DRL SAE HL	• Retrofits ANSI# H4656
DOT*/SAE	J2650, J2087	• 3 Year Warranty

Dedicated DRL Light comes on with PWM DRL circuit, and separate Low Beam function

GEN2 MHLE-SERIES 4" X 6" POLYCARBONATE LOW BEAM HEADLIGHT

MHLE-4X6LO-A
LOW BEAM

PART NUMBER	DESCRIPTION
MHLE-4X6LO-A	4" X 6" LOW BEAM

Voltage	12/24VDC	• Mechanical Aim Compliant
Amp Draw	0.7A 12V / 0.4A 24V	• Visual Aim Compliant
Dimensions	6.6" W x 4.2" H x 3.4" D	• Polycarbonate Lens & Housing
Connector	3-Pin Male H4	• <i>MaxxShield</i> Hard Coating with UV Protection
LEDs	6	• Non-Polarized Pin Out
Legal Heading	DOT L VOL SAE HL	• Retrofits ANSI# H4656
DOT*/SAE	J2650	• 3 Year Warranty

GEN2 MHLE-SERIES 4" X 6" POLYCARBONATE HIGH BEAM HEADLIGHT

MHLE-4X6HI-A
HIGH BEAM

PART NUMBER	DESCRIPTION
MHLE-4X6HI-A	4" X 6" HIGH BEAM

Voltage	12/24VDC	• Mechanical Aim Compliant
Amp Draw	0.9A 12V / 0.5A 24V	• Visual Aim Compliant
Dimensions	6.6" W x 4.2" H x 3.4" D	• Polycarbonate Lens & Housing
Connector	2-Pin Male H4	• <i>MaxxShield</i> Hard Coating with UV Protection
LEDs	5	• Non-Polarized Pin Out
Legal Heading	DOT U VO SAE HL	• Retrofits ANSI# H4651
DOT*/SAE	J2650	• 3 Year Warranty



3-Prong Low Beam and DRL



2-Prong High Beam



**All Maxxima headlights are DOT FMVSS108 / CMVSS108 Compliant*

MHLE-SERIES 5" X 7" POLYCARBONATE HEADLIGHT



PART NUMBER DESCRIPTION

MHLE-5X7HILO 5" X 7" HI/LO DUAL BEAM

Voltage	12/24VDC Dual Voltage	• Polycarbonate Housing / Polycarbonate Lens
Amp Draw	1.6A 12V / 0.8A 24V	• MaxxShield Hard Coating with UV Protection
Dimensions	7.9" W x 5.6" H x 3.9" D	• Mechanical Aiming Pads
Connector	Integrated Male H4 3-Pin	• Ultra Lightweight – Only 17.9 oz.
LEDs	12	• Retrofits ANSI# 6052, 6053, H6054
Legal Heading	DOT SAE HL	• 3 Year Warranty
DOT*/SAE	J2650	

MHLE-SERIES 7" ROUND POLYCARBONATE HEADLIGHT



PART NUMBER DESCRIPTION

MHLE-07HILO 7" ROUND HI/LO DUAL BEAM

Voltage	12/24VDC Dual Voltage	• Polycarbonate Housing / Polycarbonate Lens
Amp Draw	1.6A 12V / 0.8A 24V	• MaxxShield Hard Coating with UV Protection
Dimensions	7.0" Diam. x 3.75" Depth	• Mechanical Aiming Pads
Connector	Integrated Male H4 3-Pin	• Ultra Lightweight – Only 17.2 oz.
LEDs	12	• Retrofits ANSI# 6014, 6015, 6016, H6024
Legal Heading	DOT SAE HL	• 3 Year Warranty
DOT*/SAE	J2650	

5.75" ROUND DUAL BEAM HEADLIGHT



PART NUMBER DESCRIPTION

MHL-05HILO 5.75" ROUND HI/LO DUAL BEAM

Voltage	12/24VDC	• FMVSS-108 and CMVSS-108 Compliant
Amp Draw	1.5A HI 0.9A LO	• Light 2.0lbs Weight
Dimensions	5.75" Diam. x 3.5" Depth	• Aluminum Housing / Polycarbonate Lens
Connector	2" Cable with Male H4	• MaxxShield Hard Coating with UV Protection
LEDs	2	• Retrofits ANSI 5001, 5006, H5001, H5006
Legal Heading	DOT VOR SAE HL	• 5 Year Warranty
DOT*/SAE	J2650	

*All Maxxima headlights are DOT FMVSS108 / CMVSS108 Compliant

90MM LED LOW BEAM HEADLIGHT



PART NUMBER	DESCRIPTION	
MHL-90MMLO	90MM LOW BEAM	
Voltage	12/24VDC Dual Voltage	• 90mm LED Headlight – Low Beam
Amp Draw	1.4A 12V / 0.7A 24V	• Visual Aim Compliant
Dimensions	4.13" W x 4.13" H x 5.9" D	• Polycarbonate Lens with UV Hardcoat
- Lens	90mm	• Cast Aluminum Housing
Mounting	4 Bolt 3.35" Center to center	• Bulk Pack Individually Boxed
Connector	15" Cable with 2-pin DryFit	• 5 Year Warranty
LED	1	
Legal Heading	DOT L VOR SAE HL	
DOT*/SAE	J2650	

90MM LED HIGH BEAM HEADLIGHT



PART NUMBER	DESCRIPTION	
MHL-90MMHI	90MM HIGH BEAM	
Voltage	12/24VDC Dual Voltage	• 90mm LED Headlight – High Beam
Amp Draw	1.4A 12V / 0.7A 24V	• Visual Aim Compliant
Dimensions	4.13" W x 4.13" H x 5.9" D	• Polycarbonate Lens with UV Hardcoat
- Lens	90mm	• Cast Aluminum Housing
Mounting	4 Bolt 3.35" Center to center	• Bulk Pack Individually Boxed
Connector	15" Cable with 2-pin DryFit	• 5 Year Warranty
LED	1	
Legal Heading	DOT U VO SAE HL	
DOT*/SAE	J2650	

NEW

90MM LED COMBINATION HIGH/LOW BEAM HEADLIGHT



PART NUMBER	DESCRIPTION	
MHL-90MMHILO	90MM HI/LO DUAL BEAM	
Voltage	12/24VDC Dual Voltage	• 90mm LED Headlight – HI/LO Dual Beam
Amp Draw	2.2A 12V / 1.3A 24V	• Visual Aim Compliant
Dimensions	4.16" W x 4.56" H x 6.73" D	• 3-Wire Combination High / Low Beam
- Lens	90mm	• Polycarbonate Lens with UV Hardcoat
Mounting	4 Bolt 3.35" Center to center	• Cast Aluminum Housing
Connector	15" Cable with 3-pin DryFit	• Bulk Pack Individually Boxed
LEDs	2	• 5 Year Warranty
Legal Heading	DOT VOR SAE HL	
DOT*/SAE	J2650	

**All Maxxima headlights are DOT FMVSS108 / CMVSS108 Compliant*

MINI OVAL FOG LIGHTS



PART NUMBER	DESCRIPTION
MFL-200SY	SELECTIVE YELLOW FOG LIGHT
MFL-200W	WHITE FOG LIGHT

Voltage	12/24VDC
Amp Draw	0.8A 12V / 0.4A 24V
Dimensions	3.5" W x 2.7" H x 2.9" D
Mounting	Adjustable Stainless Steel Bracket
Connector	2 Leads Blunt Cut, 12"
LEDs	6
Legal Heading	F3
DOT/SAE	J583

- Fog Beam Pattern
- Aluminum & ABS Housing
- Acrylic Lens
- 12/24VDC Dual Voltage
- Stainless Steel Bracket
- DOT FMVSS108 / CMVSS108 Compliant
- 5 Year Warranty

DRL/DAY TIME RUNNING LIGHT OR PROJECTOR LIGHT



PART NUMBER	DESCRIPTION
PLB-630-A	DRL PROJECTOR LIGHT

Voltage	12.8VDC
Amp Draw	0.6A
Dimensions	4.4" W x 1.4" H x 1.2" D
Mounting	Adjustable Stainless Steel Bracket
Connector	2 Leads Blunt Cut, 7"
LEDs	3
Legal Heading	DOT SAE DRL
DOT*/SAE	J2087

- DOT Compliant DRL / Daytime Running Light
- 500 Lumens
- Can also be used as Work Light or Projector Light
- Compact size, light head only 4.4" x 1.4"
- Polycarbonate Lens
- Stainless Steel Mounting Bracket Included
- Black Cast Aluminum Housing
- 5 Year Warranty

- *MaxxHeat* HEATED WORK LIGHTS
- WORK LIGHTS
- WORK LIGHT BARS
- SCENE LIGHTS
- SURFACE MOUNT WORK LIGHTS



LED WORK LIGHTS

LED WORK LIGHT LUMENS CHART

All Maxxima work lights undergo stringent testing to measure light output in an Integrating Sphere, in accordance with **Illuminating Engineering Society of North America (IESNA) standard LM-79**. Light output (Lumens) is recorded after the lamp is completely warmed up at least 30 minutes. All lumen ratings referenced are warm, effective Lumens. The test process ensures Maxxima customers the actual light output matches the listed lumen output.

	LUMENS	PART NUMBER	DESCRIPTION	PAGE #
	300	MWL-10SP	Round 2" Mini LED Work Light, Grommet Mount	29
	400	MWL-33	Rectangular 5.2" x 2.2" Exterior Work / Scene Light	27
	500	MWL-21	Rectangular 4.4" x 2.5" LED Work Light	21
	550	MWL-04	Rectangular 5.9" x 3.6" LED Work Light - Black 12/24VDC	20
	550	MWL-63	Oval 6" LED Work Light, DryFit Connector	29
	550	MWL-63-X	Oval 6" LED Work Light, DryFit Connector, Bulk Pack	29
	590	MWL-13-A	Rectangular 5.9" x 2.2" Low Profile LED Work Light, Surface Mount, 12/24VDC	29
	700	MWL-11HL	Round 4.4" LED Work Light, Black Rubber Housing 12/24VDC	20
	700	MWL-12	Round 4" LED Work Light - Lamp Only for MWL-11HL	20
	750	MWL-45	Square 3.4" LED Work Light, 12/24VDC	21
IMPROVED	800	MWL-19B-MH	Round 4.8" LED Work Light, Grey, 12/24VDC MaxxHeat	13
IMPROVED	800	MWL-19-B	Round 4.8" LED Work Light, Black, 12/24VDC	13
	820	MWL-14-A	Rectangular 5.9" x 2.2" Low Profile LED Work Light, Surface Mount, 12/24VDC	29
IMPROVED	900	MWL-26-B	Rectangular 5.9" x 3.7" LED Work Light, 12/24VDC	14
IMPROVED	1,200	MWL-38-A	Round 4.8" LED Work Light, 12/24VDC	14
NEW	1,200	MWL-360	Remote Control LED Spot Light 12/24VDC Permanent Mount	23
NEW	1,200	MWL-360-MAG	Remote Control LED Spot Light 12/24VDC Magnet Mount	23
IMPROVED	1,300	MWL-39-A	Rectangular 5.9" x 3.7" LED Work Light, 12/24VDC	14
	1,400	MWL-28	Round 4.8" LED Work Light, 12/24VDC	15
	1,400	MWL-29	Rectangular 5.9" x 3.6" LED Work Light, 12/24VDC	15
	1,400	MWL-30	Square 4.7" LED Work Light, 12/24VDC	15
	1,400	MWL-34	Rectangular 9" x 2.2" Exterior Work / Scene Light	27
IMPROVED	1,450	MWL-20-A	Square 3.2" Mini LED Work Light, 12/24VDC	21
NEW	1,450	MLW-20-AD	Square 3.2" Mini LED Work Light, 12/24VDC Integrated DT Connector	21
	1,500	MWL-01B	Round 5" LED Work Light	20
	1,500	MWL-32	Rectangular 1.9" x 5.9" Exterior Scene / Load Light	28
	1,500	MWL-35	Rectangular 4" x 6" Exterior Work / Scene Light	27
NEW	1,500	MWL-51LS	Rectangular 10.7" x 1.6" 90-Degree Work Light (Liquid Silver) with Gasket and Standoff	25
	1,600	MWL-65	Rectangular 9" x 2.7" Scene / Load Light, 12/24VDC	28
	2,100	MWL-42WYCL-DC	Rectangular 5.9" x 3.6" LED Work Light AND Amber Class 1 Warning	24
	2,100	MWL-47	Rectangular 5.75" x 1.6" Low Profile LED Work Light, 12/24VDC	22
IMPROVED	2,400	MWL-41	Round 4.7" LED Work Light, 12/24VDC	16
IMPROVED	2,400	MWL-42	Rectangular 5.9" x 3.6" LED Work Light, 12/24VDC	16
IMPROVED	2,400	MWL-43	Square 4.7" x 4.2" LED Work Light, 12/24VDC	16
	2,400	MWL-50-A	Rectangular 6.2" x 3.8" LED Work Light Black Aluminum Housing, 12/24VDC	17
NEW	2,500	MWL-52	Rectangular 10.7" x 1.6" 90-Degree Work Light with Gasket and Standoff	25
	2,600	MWL-66	Rectangular 13" x 2.7" Scene / Load Light, 12/24VDC	28
	2,900	MWL-16-A	Square 4.6" LED Work Light, 12/24VDC	17
	2,900	MWL-48	Rectangular 8.5" x 1.6" Low Profile LED Work Light, 12/24VDC	22
	3,000	MTBL-10-A	Rectangular 28" x 2.8" Work Bar Light, Tow Truck Mount	23
	3,000	MWBL-1-A	Rectangular 28" x 2.8" Work Bar Light, L-Bracket Mount	23
	3,200	MWL-57-A	Rectangular 6.2" x 3.8" LED Work Light, 12/24VDC	17
	3,600	MWL-64	Square 4" LED Work Light, 12/24VDC, Integrated DT Connector	18
IMPROVED	4,200	MWL-36-A	Round 5.2" Adjustable Work Light w/ Switch, 12/24VDC, DT Connector	24
	5,000	MWL-61	Rectangular 10.6" x 3.7" LED Work Light, 12/36 VDC	18
	5,000	MWL-62	Rectangular 6.3" x 5.9" Led Work Light, 12/36 VDC	18
NEW	8,500	MWL-500	Square 5.8" x 4.7" MaxxBright Work Light (Black), 12/24VDC, DT Connector	19
NEW	8,500	MWL-501	Square 5.8" x 4.7" MaxxBright Work Light (White), 12/24VDC, DT Connector	19
NEW	9,500	MWL-510	Round 6" MaxxBright Work Light (Black), 12/24VDC, DT Connector	19
NEW	9,500	MWL-511	Round 6" MaxxBright Work Light (White), 12/24VDC, DT Connector	19
NEW	19,000	MWL-520	Rectangular 13" x 4.3" MaxxBright Work Light (Black), 12/24VDC, DT Connector	19
NEW	19,000	MWL-521	Rectangular 13" x 4.3" MaxxBright Work Light (White), 12/24VDC, DT Connector	19

IMPROVED

MaxxHeat ROUND POLYCARBONATE LED WORK LIGHT**MaxxHeat**

PART NUMBER	DESCRIPTION
MWL-19B-MH	WHITE CLEAR LENS LED WORK LIGHT – <i>MaxxHeat</i> LENS
MWL-19BY-MH	AMBER LENS LED WORK LIGHT – <i>MaxxHeat</i> LENS
Lumens	800 (White)
Voltage	12/24VDC
Amp Draw	
- Light	0.7A 12V / 0.4A 24V
- With Heater	2.4A 12V / 1.2A 24V
Dimensions	4.8" W x 1.5" D
Mounting	M8 Stainless Steel Bolt
Connector	2 Jacketed Leads Blunt Cut, 11"
LEDs	15

- *MaxxHeat* Heated Lens Activated Automatically when the temperature drops below 45 °F (7 °C)
- No Additional Wires – Built-In Heater
- Dual Voltage 12/24VDC
- Polycarbonate Lens & Housing – Noncorrosive
- Perfect for Snow & Ice Applications
- Stainless Steel Bracket and Bolt
- 5 Year Warranty

IMPROVED

800 LUMENS ROUND POLYCARBONATE LED WORK LIGHT

PART NUMBER	DESCRIPTION
MWL-19-B	ROUND WORK LIGHT – 800 LUMENS
Lumens	800
Voltage	12/24VDC
Amp Draw	0.7A 12V / 0.4A 24V
Dimensions	4.8" Diam. x 1.5" D
Mounting	M8 Stainless Steel Bolt
Connector	2 Jacketed Leads Blunt Cut, 11"
LEDs	15

- Dual Voltage 12/24VDC
- Polycarbonate Lens & Housing – Noncorrosive
- Stainless Steel Bracket and Bolt
- Color Retail Packaging
- 5 Year Warranty

IMPROVED

900 LUMENS RECTANGULAR POLYCARBONATE LED WORK LIGHT



Ultra Thin Profile

PART NUMBER DESCRIPTION

MWL-26-B RECTANGULAR WORK LIGHT – 900 LUMENS

Lumens	900	• Dual Voltage 12/24VDC
Voltage	12/24VDC	• Polycarbonate Lens &
Amp Draw	0.7A 12V / 0.4A 24V	Housing – Noncorrosive
Dimensions	5.9" W x 3.7" H x 1.2" D	• Stainless Steel Bracket and Bolt
Mounting	M8 Stainless Steel Bolt	• Color Retail Packaging
Connector	2 Jacketed Leads Blunt Cut, 11"	• 5 Year Warranty
LEDs	15	

IMPROVED

1,200 LUMENS ROUND POLYCARBONATE LED WORK LIGHT



PART NUMBER DESCRIPTION

MWL-38-A ROUND WORK LIGHT – 1,200 LUMENS

Lumens	1,200	• Dual Voltage 12/24VDC
Voltage	12/24VDC	• Polycarbonate Lens &
Amp Draw	1.2A 12V / 0.6A 24V	Housing – Noncorrosive
Dimensions	4.8" Diam. x 1.5" D	• Stainless Steel Bracket and Bolt
Mounting	M8 Stainless Steel Bolt	• Color Retail Packaging
Connector	2 Jacketed Leads Blunt Cut, 11"	• 5 Year Warranty
LEDs	15	

IMPROVED

1,300 LUMENS RECTANGULAR POLYCARBONATE LED WORK LIGHT



PART NUMBER DESCRIPTION

MWL-39-A RECTANGULAR WORK LIGHT – 1,300 LUMENS

Lumens	1,300	• Dual Voltage 12/24VDC
Voltage	12/24VDC	• Polycarbonate Lens &
Amp Draw	1.3A 12V / 0.7A 24V	Housing – Noncorrosive
Dimensions	5.9" W x 3.7" H x 1.2" D	• Stainless Steel Bracket and Bolt
Mounting	M8 Stainless Steel Bolt	• Color Retail Packaging
Connector	2 Jacketed Leads Blunt Cut, 11"	• 5 Year Warranty
LEDs	15	

1,400 LUMENS ROUND LED WORK LIGHT



UL
UL Recognized

PART NUMBER DESCRIPTION

MWL-28 **ROUND WORK LIGHT – 1,400 LUMENS**

UPGRADED SPECIFICATIONS

Lumens	1,400
Voltage	12/24VDC
Amp Draw	1.4A 12V / 0.7A 24V
Dimensions	4.7" Diam x 1.6" Deep
Mounting	5/16" Stainless Steel Bolt
Connector	2 Jacketed Leads Blunt Cut, 11"
LEDs	6

FEATURES

- Dual Voltage 12/24VDC
- Black Aluminum Housing
- Polycarbonate Lens
- UL Recognized
- Color Retail Packaging
- 5 Year Warranty

1,400 LUMENS RECTANGLE LED WORK LIGHT



PART NUMBER DESCRIPTION

MWL-29 **RECTANGULAR WORK LIGHT – 1,400 LUMENS**

UPGRADED SPECIFICATIONS

Lumens	1,400
Voltage	12/24VDC
Amp Draw	1.4A 12V / 0.7A 24V
Dimensions	5.9" W x 3.6" H x 1.5" D
Mounting	5/16" Stainless Steel Bolt
Connector	2 Jacketed Leads Blunt Cut, 11"
LEDs	6

FEATURES

- Dual Voltage 12/24VDC
- Black Aluminum Housing
- Polycarbonate Lens
- Color Retail Packaging
- 5 Year Warranty

1,400 LUMENS SQUARE LED WORK LIGHT



PART NUMBER DESCRIPTION

MWL-30 **SQUARE WORK LIGHT – 1,400 LUMENS**

UPGRADED SPECIFICATIONS

Lumens	1,400
Voltage	12/24VDC
Amp Draw	1.4A 12V / 0.7A 24V
Dimensions	4.7" W x 4.2" H x 1.7" D
Mounting	5/16" Stainless Steel Bolt
Connector	2 Jacketed Leads Blunt Cut, 11"
LEDs	6

FEATURES

- Dual Voltage 12/24VDC
- Black Aluminum Housing
- Polycarbonate Lens
- Color Retail Packaging
- 5 Year Warranty

IMPROVED



2,400 LUMENS ROUND LED WORK LIGHT



PART NUMBER DESCRIPTION

MWL-41 ROUND WORK LIGHT – 2,400 LUMENS

Lumens	2,400	• Now 2,400 Lumens
Voltage	12/24VDC Dual Voltage	• Dual Voltage 12/24VDC
Amp Draw	2.4A 12V / 1.2A 24V	• Black Aluminum Housing
Dimensions	4.7" Diam. x 1.6" Deep	• Polycarbonate Lens & Housing
Mounting	5/16" Stainless Steel Bolt	• Stainless Steel Bracket and Bolt
Connector	2 Jacketed Leads Blunt Cut, 11"	• Color Retail Packaging
LEDs	16	• 5 Year Warranty

IMPROVED



2,400 LUMENS RECTANGULAR LED WORK LIGHT



PART NUMBER DESCRIPTION

MWL-42 RECTANGULAR WORK LIGHT – 2,400 LUMENS

Lumens	2,400	• Now 2,400 Lumens
Voltage	12/24VDC Dual Voltage	• Dual Voltage 12/24VDC
Amp Draw	2.4A 12V / 1.2A 24V	• Black Aluminum Housing
Dimensions	5.9" W x 3.6" H x 1.5" D	• Polycarbonate Lens & Housing
Mounting	5/16" Stainless Steel Bolt	• Stainless Steel Bracket and Bolt
Connector	2 Jacketed Leads Blunt Cut, 11"	• Color Retail Packaging
LEDs	16	• 5 Year Warranty

IMPROVED



2,400 LUMENS SQUARE LED WORK LIGHT



PART NUMBER DESCRIPTION

MWL-43 SQUARE WORK LIGHT – 2,400 LUMENS

Lumens	2,400	• Dual Voltage 12/24VDC
Voltage	12/24VDC Dual Voltage	• Now 2,400 Lumens
Amp Draw	2.4A 12V / 1.2A 24V	• Black Aluminum Housing
Dimensions	4.7" W x 4.2" H x 1.7" D	• Polycarbonate Lens & Housing
Mounting	5/16" Stainless Steel Bolt	• Stainless Steel Bracket and Bolt
Connector	2 Jacketed Leads Blunt Cut, 11"	• Color Retail Packaging
LEDs	16	• 5 Year Warranty

2,400 LUMENS RECTANGULAR LED WORK LIGHT

Optional M50919
Extended Bracket

PART NUMBER	DESCRIPTION	
MWL-50-A	RECTANGULAR WORK LIGHT – 2,400 LUMENS	
M50919	OPTIONAL EXTENDED MOUNTING BRACKET	
Lumens	2,400	• 12 - 36 VDC Multi-Voltage
Voltage	12 - 36 VDC Multi-Voltage	• Flood Beam Pattern
Amp Draw	2.1A 12V / 1.1A 24V	• Black Aluminum Housing
Dimensions	6.2" W x 3.8" H x 1.8" D	• Polycarbonate Lens
Mounting	M8 Stainless Steel Bolt	• Stainless Steel Bolt and Bracket
Connector	2 Jacketed Leads Blunt Cut, 12"	• Color Retail Packaging
LEDs	6	• 5 Year Warranty

3,200 LUMENS RECTANGULAR LED WORK LIGHT

Optional M50919
Extended Bracket

PART NUMBER	DESCRIPTION	
MWL-57-A	RECTANGULAR WORK LIGHT – 3,200 LUMENS	
M50919	OPTIONAL EXTENDED MOUNTING BRACKET	
Lumens	3,200	• 12 - 36 VDC Multi-Voltage
Voltage	12 - 36 VDC Multi-Voltage	• Flood Beam Pattern
Amp Draw	3.3A 12V / 1.7A 24V	• Black Aluminum Housing
Dimensions	6.2" W x 3.8" H x 1.8" D	• Polycarbonate Lens
Mounting	M8 Stainless Steel Bolt	• Stainless Steel Bolt and Bracket
Connector	2 Jacketed Leads Blunt Cut, 12"	• Color Retail Packaging
LEDs	8	• 5 Year Warranty

2,900 LUMENS SQUARE LED WORK LIGHT



PART NUMBER	DESCRIPTION	
MWL-16-A	SQUARE WORK LIGHT – 2,900 LUMENS	
Lumens	2,900	• 10 LEDs / 2,900 Lumens
Voltage	12/24VDC Dual Voltage	• Flood Beam Pattern
Amp Draw	2.5A 12V / 1.2A 24V	• Dual Voltage 12/24VDC
Dimensions	4.6" W x 4.1" H x 3" D	• Polycarbonate Lens,
Mounting	5/16" Stainless Steel Bolt	Aluminum Housing
Connector	2 Jacketed Leads Blunt Cut, 10"	• Color Retail Packaging
LEDs	10	• 5 Year Warranty

3,600 LUMENS SQUARE LED WORK LIGHT



Integrated DT04 Connector

Includes Pigtail Connector

PART NUMBER	DESCRIPTION
MWL-64	SQUARE WORK LIGHT – 3,600 LUMENS
Lumens	3,600
Voltage	12/24VDC
Amp Draw	3.0A 12.8V / 1.5A 24V
Dimensions	5.3" W x 3.9" H x 2.3" D
Mounting	M10 Stainless Steel Bolt
Connector	Integrated DT04 Deutsch-style Includes DT06 Pigtail, 5" long, blunt cut
LEDs	9 • High Powered 3,600 Lumens Work Light • 12/24VDC Dual Voltage • 9 LEDs / 3,600 Lumens • Deutsch-style connector cast into housing • Includes pigtail connector, DT06 to blunt cut, 5" long • Polycarbonate Lens, Cast Aluminum Housing • 5 Year Warranty

5,000 LUMENS ULTRA BRIGHT LED WORK LIGHT



PART NUMBER	DESCRIPTION
MWL-62	SQUARE WORK LIGHT – 5,000 LUMENS
Lumens	5,000
Voltage	12 - 36 VDC Multi-Voltage
Amp Draw	5.4A 12V / 2.9A 36V
Dimensions	6.3" W x 5.9" H x 2.3" D
Mounting	5/16" Stainless Steel Bolt
Connector	Integrated DT04 Deutsch-style Includes DT06 Pigtail, 6" long, blunt cut
LEDs	16 • Ultra High Powered – 5,000 Lumens • 12 - 36 VDC Multi-Voltage • Integrated Deutsch-Style Connector • Pigtail Connector Included • Polycarbonate Lens • 5 Year Warranty

5,000 LUMENS ULTRA BRIGHT LED WORK LIGHT BAR



PART NUMBER	DESCRIPTION
MWL-61	4" X 11" WORK LIGHT BAR – 5,000 LUMENS
Lumens	5,000
Voltage	12 - 36 VDC Multi-Voltage
Amp Draw	4.5A 12VDC / 2.3A 24VDC
Dimensions	10.6" W x 3.7" H x 2.4" D
Mounting	Adjustable Stainless Steel Bracket included
Connector	Jacketed Cable, DT-04 Connector, 17" Includes Mating DT-06 Pigtail with Blunt Cut Leads, 5"
LEDs	56 • Ultra High Powered Work Light Bar • 70 Degree, Wide Flood Beam • Adjustable Mounting Bracket • Polycarbonate Lens • 5 Year Warranty

NEW

8,500 LUMENS *MaxxBright* SQUARE LED WORK LIGHT



DT Pigtail
Included

PART NUMBER	DESCRIPTION
MWL-500	SQUARE WORK LIGHT – 8,500 LUMENS, BLACK
MWL-501	SQUARE WORK LIGHT – 8,500 LUMENS, WHITE
Lumens	8,500
Voltage	12/24VDC Dual Voltage
Amp Draw	8.0A 12V / 4.0A 24V
Dimensions	5.8" W x 4.7" H x 3.5" D 5.3" Overall H w/ Brkt.
Mounting	3 Bolts: 2 M8, 1 M10
Connector	Integrated Deutsch-style DT04, Includes DT06 Pigtail, 19"
LEDs	12

- *MaxxBright* High Powered Work Light
- 8,500 Lm Flood Beam / Scene Light
- Available in Black or White Housing
- Water-Tight Deutsch-Style Connector
- Mating Pigtail Connector Included
- Extra Heavy Duty Bail Mount Bracket
- 5 Year Warranty

NEW

9,500 LUMENS *MaxxBright* ROUND LED WORK LIGHT



DT Pigtail
Included

PART NUMBER	DESCRIPTION
MWL-510	ROUND WORK LIGHT – 9,500 LUMENS, BLACK
MWL-511	ROUND WORK LIGHT – 9,500 LUMENS, WHITE
Lumens	9,500
Voltage	12/24VDC Dual Voltage
Amp Draw	8.0A 12V / 4.0A 24V
Dimensions	6" Diam. x 3.5" D 6.7" Overall H w/ Brkt.
Mounting	3 Bolts: 2 M8, 1 M10
Connector	Integrated Deutsch-style DT04, Includes DT06 Pigtail, 19"
LEDs	14

- *MaxxBright* High Powered Work Light
- 9,500 Lm Flood Beam / Scene Light
- Available in Black or White Housing
- Water-Tight Deutsch-Style Connector
- Mating Pigtail Connector Included
- Extra Heavy Duty Bail Mount Bracket
- 5 Year Warranty

NEW

19,000 LUMENS *MaxxBright* RECTANGULAR LED WORK LIGHT



DTP Pigtail
Included

PART NUMBER	DESCRIPTION
MWL-520	RECTANGULAR WORK LIGHT – 19,000 LUMENS, BLACK
MWL-521	RECTANGULAR WORK LIGHT – 19,000 LUMENS, WHITE
Lumens	19,000
Voltage	12/24VDC Dual Voltage
Amp Draw	17.5A 12V / 8.7A 24V
Dimensions	13" W x 4.3" H x 3.5" D 4.9" Overall H w/ Brkt.
Mounting	3 Bolts: 2 M10, 1 M12
Connector	DTP04-Style on 12" Cable Includes DTP06 Pigtail, 7.5"
LEDs	29

- *MaxxBright* High Powered Work Light
- 19,000 Lm Flood Beam / Scene Light
- Available in Black or White Housing
- Water-Tight Deutsch-Style Connector
- Mating Pigtail Connector Included
- Extra Heavy Duty Bail Mount Bracket
- 5 Year Warranty

550 LUMENS RECTANGULAR LED WORK LIGHT



PART NUMBER	DESCRIPTION	
MWL-04	RECTANGULAR WORK LIGHT – 550 LUMENS	
Lumens	550	• Dual Voltage 12/24VDC
Voltage	12/24VDC Dual Voltage	• Flood Beam Pattern
Amp Draw	0.9A 12V / 0.5A 24V	• Aluminum Powder Coated Housing
Dimensions	5.9" W x 3.6" H x 1.6" D	• Polycarbonate Lens
Mounting	5/16" Stainless Steel Bolt	• Stainless Steel Bolt & Bracket
Connector	2 Jacketed Leads Blunt Cut, 11"	• 5 Year Warranty
LEDs	6	

700 LUMENS 4.5" ROUND LED WORK LIGHT



MWL-11HL

PART NUMBER	DESCRIPTION	
MWL-11HL	WORK LIGHT IN RUBBER HOUSING – 700 LUMENS	
MWL-12	LAMP ONLY – 700 LUMENS	
MRH-11	HOUSING ONLY	
M50412	ANGLED GROMMET	
Lumens	700	• Dual Voltage 12/24VDC
Voltage	12/24VDC Dual Voltage	• Flood Beam Pattern
Amp Draw	1.6A 12V / 0.9A 24V	• Aluminum Lamp Housing
Dimensions	4.4" Diam.	• Black Rubber Outer Housing
Mounting	5/16" Stainless Steel Bolt	• Polycarbonate Lens
Connector	1 Jacketed Leads Blunt Cut, 11"	• Retrofits ANSI 4411, PAR 36
LEDs	6	• 5 Year Warranty



MWL-12



MWL-12 Rear



M50412

1,500 LUMENS 5" ROUND LED WORK LIGHT



MWL-01 Guard

PART NUMBER	DESCRIPTION	
MWL-01B	ROUND WORK LIGHT – 1,500 LUMENS	
MWL-01GUARD	OPTIONAL LENS COVER	
Lumens	1,500	• Dual Voltage 12/24VDC
Voltage	12/24VDC Dual Voltage	• Flood Beam Pattern
Amp Draw	2.5A 12VDC / 1.3A 24VDC	• Aluminum Powder Coated Housing
Dimensions	5.0" Diam. x 1.8" Depth	• Polycarbonate Lens
Mounting	5/16" Stainless Steel Bolt	• Stainless Steel Bolt & Bracket
Connector	2 Jacketed Leads Blunt Cut, 11"	• 5 Year Warranty
LEDs	6	

500 LUMENS RECTANGULAR LED WORK LIGHT



PART NUMBER	DESCRIPTION	
MWL-21	THIN RECTANGULAR WORK LIGHT – 500 LUMENS	
Lumens	500	• Flood Beam Pattern
Voltage	12.8VDC	• Aluminum Powder Coated Housing
Amp Draw	0.7A	• Polycarbonate Lens
Dimensions	4.4" W x 2.5" H x 1.1" D	• Low LED Amp Draw
Mounting	Adjustable Stainless Steel Bracket	• Stainless Steel Bolt & Bracket
Connector	2 Jacketed Leads Blunt Cut, 11"	• 5 Year Warranty
LEDs	6	

750 LUMENS COMPACT 3" SQUARE LED WORK LIGHT



PART NUMBER	DESCRIPTION	
MWL-45	COMPACT 3" WORK LIGHT – 750 LUMENS	
Lumens	750	• Compact 3" Square Work Light
Voltage	12/24VDC Dual Voltage	• 750 Lumens
Amp Draw	0.8A 12V / 0.5A 24V	• 12/24 Dual Voltage
Dimensions	3.375" W x 3.0" H x 1.75" D	• Aluminum Housing
Mounting	5/16" Stainless Steel Bolt	• Polycarbonate Lens
Connector	2 Jacketed Leads Blunt Cut, 18"	• 5 Year Warranty
LEDs	4	

NEW

1,450 LUMENS COMPACT 3" SQUARE LED WORK LIGHT



PART NUMBER	DESCRIPTION	
MWL-20-A	COMPACT CUBE LIGHT – 1,450 LUMENS, HARD-WIRED	
MWL-20-AD	COMPACT CUBE LIGHT – 1,450 LUMENS, DT PIGTAIL	
Lumens	1,450	• Compact 3" Cube Style Work Light
Voltage	12/24VDC Dual Voltage	• Available in Hard-Wired (-A), or Removable DT Pigtail (-AD)
Amp Draw	1.3A 12V / 0.7A 24V	
Dimensions	3.0" W x 2.8" H x 2.6" D (2.6" -AD Model)	• Includes 2 Sets of Mounting Brackets Standard U-Bracket & Extended Bracket
Mounting	M10 Stainless Steel Bolt	• Polycarbonate Lens, Aluminum Housing
Connector	2 Leads Blunt Cut, 15"	• Stainless Steel Bolt & Bracket
- AD Model	Integrated DT04, and DT06 Pigtail	• 5 Year Warranty
LEDs	4	



Rear -AD Model with
Integrated DT-04 Receptacle



Optional Extended Bracket Included

2,100 LUMENS LOW-PROFILE LED WORK LIGHT



MWL-47



Adjustable Swivel Bracket



Top View

PART NUMBER	DESCRIPTION
MWL-47	5.75" LOW PROFILE WORK LIGHT – 2,100 LUMENS

Lumens	2,100
Voltage	12/24VDC
Amp Draw	1.6A 12.8V / 0.9A 24V
Dimensions	5-3/4" W x 1-5/8" H x 1-7/8" D
Mounting	M10 Stainless Steel Bolt
Connector	2 Leads Blunt Cut, 11"
LEDs	6

- Low-Profile – Only 1-5/8" Height
- 6 LEDs, and 2,100 Lumens
- Adjustable Swivel Mounting Bracket
- Stainless Steel Mounting and Hardware
- Polycarbonate Lens, Aluminum Housing
- 5 Year Warranty

2,900 LUMENS LOW-PROFILE LED WORK LIGHT



MWL-48



Adjustable Swivel Bracket



PART NUMBER	DESCRIPTION
MWL-48	8.5" LOW PROFILE WORK LIGHT – 2,900 LUMENS

Lumens	2,900
Voltage	12/24VDC
Amp Draw	2.2A 12.8V / 1.2A 24V
Dimensions	8-1/2" W x 1-5/8" H x 1-7/8" D
Mounting	M10 Stainless Steel Bolt
Connector	2 Leads Blunt Cut, 11"
LEDs	8

- Low-Profile – Only 1-5/8" Height
- 8 LEDs, and 2,900 Lumens
- Adjustable Swivel Mounting Bracket
- Stainless Steel Mounting and Hardware
- Polycarbonate Lens, Aluminum Housing
- 5 Year Warranty

3,000 LUMENS LOW-PROFILE LED WORK LIGHT



PART NUMBER	DESCRIPTION	
MWBL-1-A	24" WORK LIGHT BAR – 3,000 LUMENS	
Lumens	3,000	• Slim Profile – Light Head Only 1.4 inches tall
Voltage	12.8V	• Polycarbonate Lens
Amp Draw	3.4A	• Aluminum Housing
Dimensions		• Universal L-Mount Brackets
- Light only	24.3" W x 1.4" H x 1.3" D	• 5 Year Warranty
- With Bracket	27.7" W x 2.8" H x 1.5" D	
Mounting	(2) Adjustable L-Brackets	
Connector	2 Jacketed Leads Blunt Cut, 18"	
LEDs	120	

3,000 LUMENS LED TOW BAR LIGHT



PART NUMBER	DESCRIPTION	
MTBL-10-A	TOW BAR LIGHT – 3,000 LUMENS	
Lumens	3,000	• Slim Profile – Light Head Only 1.4 inches tall
Voltage	12.8V	• Polycarbonate Lens
Amp Draw	3.4A	• Replaces Jerr-Dan Over-Winch Work Light Bar
Dimensions		• 5 Year Warranty
- Light only	24.3" W x 1.4" H x 1.3" D	
- With Bracket	29.5" W x 10.3" H x 2.0" D	
Mounting	Adjustable U-Bracket	
Connector	2 Jacketed Leads with Delphi Connector, 18"	
LEDs	120	

NEW

360-DEGREE REMOTE CONTROL LED SPOT / FLOOD LIGHT



Horizontal Adjustment

PART NUMBER	DESCRIPTION	
MWL-360	REMOTE CONTROL SPOT LIGHT – PERMANENT MOUNT	
MWL-360-MAG	REMOTE CONTROL SPOT LIGHT – MAG MOUNT	
MWL-360-REM	REPLACEMENT REMOTE CONTROL FOR MWL-360-SERIES	
Lumens	1,200	• 360-Degree Remote Controlled Spotlight and Flood Light
Candela	180,000	• Adjustable Beam Pattern - Spot Beam or Flood Beam
Voltage	12/24VDC	• Beam Adjustable from 5 Degrees to 45 Degrees
Amp Draw	2.1A 12V / 1.0A 24V	• Horizon Rotation: 360° Continuous
Dimensions	8.2" W x 10.7" L x 4.9" H (5.7" H -MAG Model)	• Vertical Rotation: 90°
Mounting	4 Stud Mount 4 Magnets (-MAG Model)	• IP67 Sealed Dome
Connector	10-Foot Cable	• Available in Permanent Mount or Mag Mount
LEDs	3	• Includes Remote Control
		• FCC Certified
		• 2 Year Warranty

REMOTE CONTROL FEATURES:

- Spot or Flood Beam
- Includes Mounting Bracket
- Uses 23A Battery
- Fast or Slow Adjust
- Can Be Used In Wired or Wireless Modes
- Dimensions 2.5" W x 4.6" H x 1.7" D

NEW

4,200 LUMENS ADJUSTABLE LED WORK LIGHT WITH ON/OFF SWITCH



PART NUMBER	DESCRIPTION
MWL-36-A	ADJUSTABLE WORK LIGHT – 4,200 LUMENS

Lumens	4,200
Voltage	12/24VDC Dual Voltage
Amp Draw	3.6A 12V / 1.8A 24V
Dimensions	4.6" Diam. x 3.2" Deep (Light Only) 4.6" W x 9.4" H x 3.2" D Overall
Mounting	4 Hole Surface, 3.7" x 0.85" C to C, with Swivel Bracket
Connector	Hardwired 11" Pigtail with DT04 Plug
LEDs	9

- Adjustable Work Light on Swivel Base
- Integrated On/Off Switch on Back of Light
- High Power – 4,200 Lumens
- 12/24VDC Dual Voltage
- Polycarbonate Lens & Aluminum Housing
- Stainless Steel Bracket & Bolt
- 5 Year Warranty

2,100 LUMENS DUAL FUNCTION LED WORK LIGHT / WARNING LIGHT

Amber
Flashing Warning LightWhite
Work Light

PART NUMBER	DESCRIPTION
MWL-42WYCL-DC	MULTI-FUNCTION WORK + WARN LIGHT

Lumens	2,100
Voltage	12/24VDC Dual Voltage
Amp Draw	2.6A 12V / 1.3A 36V
Dimensions	5.9" W x 3.6" H x 1.5" D
Mounting	5/16" Stainless Steel Bolt
Connector	4 Jacketed Leads Blunt Cut, 11"
LEDs	16 (12 White, 4 Amber)
SAE	J595 Class 1

- Dual Function Work Light / Flashing Warning Light
- 2,100 Lumens Work Light And
Amber Flashing Warning Light – SAE Class 1
- Dual Color Warning: Amber Only or Amber/White
- 28 Selectable Programmable Flash Patterns
- 12/24VDC Dual Voltage
- Black Aluminum Housing & Polycarbonate Lens
- Stainless Steel Swivel Bracket & Bolt
- 5 Year Warranty

NEW**90-DEGREE LED SURFACE MOUNT WORK LIGHT**

The MWL-52 and MWL-51LS are surface mount exterior work lights designed to attach to a flat surface and illuminate the area directly above, below or to the side of the light. They feature high output LEDs and a coated black housing (MWL-52) or a silver coated housing (MWL-51LS). These lights feature an aluminum housing and polycarbonate lens and are backed by a 5-year warranty.



MWL-52 Black Housing
2,500 Lumens




MWL-51LS Silver Housing
1,500 Lumens



90-Degree Off-Axis Lighting



Side View



Includes Mounting Gasket



Includes Optional Stand-Off Bracket



Excellent for Ground Illumination

PART NUMBER	DESCRIPTION		
MWL-51LS	11" X 2" WORK LIGHT 90-DEGREE SURFACE MOUNT, SILVER HOUSING – 1,500 LUMENS		
MWL-52	11" X 2" WORK LIGHT 90-DEGREE SURFACE MOUNT, BLACK HOUSING – 2,500 LUMENS		
SPECIFICATIONS	MWL-51LS	MWL-52	FEATURES
Lumens	1,500	2,500	• 90-Degree Lighting • 1,500 Lumen (-51LS) / 2,500 Lumen (-52) • 12/24VDC Dual Voltage • Includes Gasket and Stand-Off Bracket • Polycarbonate Lens & Aluminum Housing • Retail Packaging • 5 Year Warranty
Voltage	12/24VDC	12/24VDC	
Amp Draw	1.8A 12V / 0.9A 24V	2.4A 12V / 1.2 24V	
Dimensions	10.7" W x 1.6" H x 1.8" D	10.7" W x 1.6" H x 1.8" D	
Mounting	2 Hole Surface, 10" C to C	2 Hole Surface, 10" C to C	
Connector	2 Leads Blunt Cut, 11"	2 Leads Blunt Cut, 11"	
LEDs	8	8	

SURFACE MOUNT LED SCENE LIGHTS / UNDERCARRIAGE LIGHTS



PART NUMBER	M84421-E	M84419-E	M84420-E	M84445-E	M84422-E
Description	24" Model	18" Model	13" Model	8" Model	4" Model
Lumens	1,700	1,300	850	500	180
Voltage	12.8VDC	12.8VDC	12.8VDC	12.8VDC	12.8VDC
Amp Draw	1.4A	1.1A	0.8A	0.5A	0.2A
Dimensions	23.8" L x 1.4" H x 1.4" D	18.3" L x 1.4" H x 1.4" D	13" L x 1.4" H x 1.4" D	8.6" L x 1.4" H x 1.4" D	4.4" L x 1.4" H x 1.4" D
Mounting	2 Hole 23-5/16" C to C	2 Hole 17-7/8" C to C	2 Hole 12-9/16" C to C	2 Hole 8-1/8" C to C	2 Hole 3-7/8" C to C
Connector	2 Leads .180 Bullets, 17"	2 Leads .180 Bullets, 17"	2 Leads .180 Bullets, 17"	2 Leads .180 Bullets, 17"	2 Leads .180 Bullets, 17"
LEDs	84	63	42	24	9


FEATURES

- Scene Light, Undercarriage Light, Compartment Light, or Work Light
- Sealed Waterproof IP-68
- Aluminum Housing with Rugged Nylon End Caps
- Includes Mounting Spacers which allow external cable routing
- 120-Degree Light Output
- Also Available in Bulk Pack (-X)
- 3 Year Warranty

SURFACE MOUNT DUAL FUNCTION LED SCENE LIGHT / WARNING LIGHT



2 Lights in one: Dual Color and Dual Function Light operates as a white scene light and also as a flashing amber/white warning light

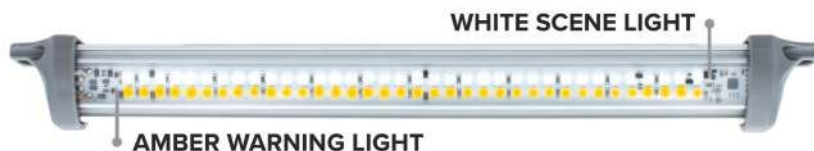

PART NUMBER	DESCRIPTION
M84420YWCL-DC	13" SCENE LIGHT/WARN LIGHT
Lumens	700
Voltage	12.8VDC
Amp Draw	0.9A
Dimensions	13" L x 1.4" H x 1.4" D
Mounting	2 Hole 12-9/16" Center to Center
Connector	4 Leads .180 Bullets, 17"
LEDs	72 (36 Amber, 36 White)
Legal Heading	W-1
SAE	J595 Class 1

- 700 Lumens White LED Scene Light / Undercarriage Light
- SAE Class 1 Amber LED Flashing Warning Light
- 28 Flash Patterns
- Aluminum Housing with Rugged Nylon End Caps
- Polycarbonate Lens
- Exterior Mount / Sealed IP68 Rated
- 3 Year Warranty

400 LUMENS 2" X 5" EXTERIOR SURFACE MOUNT LED WORK/SCENE LIGHT



PART NUMBER	DESCRIPTION	
MWL-33	RECTANGULAR SCENE LIGHT – 400 LUMENS	
M50140	OPTIONAL ADHESIVE GASKET	
Lumens	400	• Cast Aluminum Housing
Voltage	12.8VDC	• Polycarbonate Lens
Amp Draw	0.5A 12.8VDC	• 5 Year Warranty
Dimensions	5.2" W x 2.2" H x 0.7" D	
Mounting	4 Hole Surface	
Connector	2 Leads Blunt Cut, 12"	
LEDs	9	

1,400 LUMENS 2" X 9" EXTERIOR SURFACE MOUNT LED WORK/SCENE LIGHT



PART NUMBER	DESCRIPTION	
MWL-34	RECTANGULAR SCENE LIGHT – 1,400 LUMENS	
Lumens	1,400	• Cast Aluminum Housing
Voltage	12/24VDC	• Polycarbonate Lens
Amp Draw	1.4A 12.8V / 0.7A 24V	• Mounting Gasket Attached
Dimensions	9.0" W x 2.2" H x 0.9" D	• 5 Year Warranty
Mounting	2 Hole Surface	
Connector	2 Leads Blunt Cut, 12"	
LEDs	24	

1,500 LUMENS 4" X 6" EXTERIOR SURFACE MOUNT LED WORK/SCENE LIGHT



PART NUMBER	DESCRIPTION	
MWL-35	RECTANGULAR SCENE LIGHT – 1,500 LUMENS	
Lumens	1,500	• Cast Aluminum Heat Sink
Voltage	12/24VDC	• Polycarbonate Lens
Amp Draw	1.4A 12.8V / 0.7A 24V	• Mounting Gasket Attached
Dimensions	6.0" W x 4.0" H x 0.9" D	• 5 Year Warranty
Mounting	4 Hole Surface	
Connector	2 Leads Blunt Cut, 11"	
LEDs	24	

1,500 LUMENS LED WORK LIGHT / SCENE LIGHT / LOAD LIGHT



Directs light in a downward angle

PART NUMBER	DESCRIPTION
MWL-32	1.9" X 5.9" SCENE LIGHT – 1,500 LUMENS
Lumens	1,500
Voltage	12/24VDC Dual Voltage
Amp Draw	1.6A/12V 0.8A/24V
Dimensions	5.9" W x 1.9" H x 1.6" D
Mounting	2 Hole Surface, 5-9/32" Center to Center
Connector	2 Jacketed Leads Blunt Cut, 16"
LEDs	52

- Exterior Mount Scene Light, Load Light, Work Light
- 1,500 Lumens
- 45° Downward Angle
- 12/24VDC Dual Voltage
- Surface Mount – Screws Included
- Polycarbonate Lens, Cast Aluminum Housing
- 5 Year Warranty

1,600 AND 2,600 LUMENS LED WORK LIGHT / SCENE LIGHT / LOAD LIGHT



MWL-65



MWL-66



45° Degree Down Angle

PART NUMBER	DESCRIPTION	
MWL-65	2.7" X 9" SCENE LIGHT – 1,600 LUMENS	
MWL-66	2.7" X 13" SCENE LIGHT – 2,600 LUMENS	
SPECIFICATIONS	MWL-65	MWL-66
Lumens	1,600	2,600
Voltage	12/24VDC	12/24VDC
Amp Draw	1.9A 12V / 1.0A 24V	2.7A 12V / 1.4A 24V
Dimensions	9" W x 2.7" H x 2" D	13" W x 2.7" H x 2" D
Mounting	2 Hole Surface 7.25" C to C	2 Hole Surface 11.2" C to C
Connector	2 Leads Blunt Cut, 19"	2 Leads Blunt Cut, 19"
LEDs	36	60

- Exterior Mount Scene Light, Load Light, Work Light
- 1,600 Lumens (MWL-65) or 2,600 Lumens (MWL-66)
- Beam Directed at a 45° Downward Angle
- 12/24VDC Dual Voltage
- Surface Mount – 2 M6 Self Tapping Screws Included
- Polycarbonate Lens, Cast Aluminum Housing
- 5 Year Warranty

590 AND 820 LUMENS 2" X 6" EXTREME CONDITIONS SURFACE MOUNT LED WORK LIGHT



Optional M50126
Swivel Bracket

PART NUMBER	DESCRIPTION
MWL-13-A	SURFACE MOUNT WORK LIGHT – 590 LUMENS
MWL-14-A	SURFACE MOUNT WORK LIGHT – 820 LUMENS
M50126	OPTIONAL SWIVEL BRACKET

SPECIFICATIONS	MWL-13-A	MWL-14-A
Lumens	590	820
Voltage	12/24VDC Dual Voltage	12/24VDC Dual Voltage
Amp Draw	0.6A 12V / 0.3A 24V	0.8A 12V / 0.4A 24V
Dimensions	5.9" W x 2.2" H x 0.9" D	5.9" W x 2.2" H x 0.9" D
Mounting	2 Hole Surface	2 Hole Surface
Connector	2 Leads Blunt Cut, 11"	2 Leads Blunt Cut, 11"
LEDs	6	8

- Low Profile Surface Mount Work Light
- Aluminum Housing
- High Temp, Tempered Glass Lens
- Extreme Wide Angle Beam
- 5 Year Warranty

550 LUMENS 6" OVAL GROMMET MOUNT LED WORK LIGHT



PART NUMBER	DESCRIPTION
MWL-63	6" OVAL WORK LIGHT – 550 LUMENS
MWL-63-X	6" OVAL WORK LIGHT – 550 LUMENS, BULK PACK

Lumens	550	• 6" Oval Grommet Mount Work Light
Voltage	12.8VDC	• 550 Lumens
Amp Draw	0.5A	• DryFit Connector
Dimensions	6.45" W x 2.26" H x 0.83" D	• Polycarbonate Lens
Mounting	6" Oval Grommet	• 5 Year Warranty
Connector	DryFit	
LEDs	12	

300 LUMENS 2" ROUND GROMMET MOUNT MINI LED WORK LIGHT



M50124

PART NUMBER	DESCRIPTION
MWL-10SP	2" GROMMET MOUNT WORK LIGHT – 300 LUMENS - DISCONTINUED
M50124	OPTIONAL STAINLESS GROMMET COVER - DISCONTINUED

Lumens	300	• 2" Mini Design
Voltage	12.8VDC	• Polycarbonate Lens & Housing
Amp Draw	0.6A	• Black Vinyl Grommet Included
Dimensions	2.1" Diam. x 2.1" Depth	• 5 Year Warranty
Mounting	Grommet, 2-1/8" Hole Size	
Connector	2 Jacketed Leads Blunt Cut, 11"	
LEDs	2	

LED INTERIOR LIGHTS

- OVERHEAD DOME LIGHTS
- INTERIOR LIGHTS
- RIGID LINEAR STRIP LIGHTS
- FLEXIBLE STRIP LIGHTS
- COURTESY LIGHTS



LED INTERIOR LIGHTS

5.5" ROUND SURFACE MOUNT LED DOME LIGHTS



PART NUMBER	DESCRIPTION		
M84406-C	450 LUMENS DOME LIGHT		
M84405-C	325 LUMENS DOME LIGHT		
SPECIFICATION	M84406-C	M84405-C	
Lumens	450	325	• Notched Base for Cable Exit
Voltage	12.8VDC	12.8VDC	• Polycarbonate Lens & Housing
Amp Draw	0.6A	0.4A	• 5 Year Warranty
Dimensions	5.5" Diam. x 0.8" D	5.5" Diam. x 0.8" D	
Mounting	3 Hole, 5" Bolt Circle	3 Hole, 5" Bolt Circle	
Connector	2 Leads Blunt Cut, 13"	2 Leads Blunt Cut, 13"	
LEDs	27	18	

5.5" ROUND SURFACE MOUNT LED DOME LIGHTS — PIR MOTION SENSOR



PART NUMBER	DESCRIPTION		
M84406-PIR-X	450 LUMENS DOME LIGHT WITH PIR SENSOR – BULK PACK		
M84405-PIR	325 LUMENS DOME LIGHT WITH PIR SENSOR		
SPECIFICATION	M84406-PIR-X	M84405-PIR	
Lumens	450	325	• Auto On/Auto Off
Voltage	12.8VDC	12.8VDC	• PIR Motion Switch
Amp Draw	0.6A	0.4A	• 3 Minute Auto Shut Off
Dimensions	5.5" Diam. x 1.0" D	5.5" Diam x 1.0" D	• Polycarbonate Lens & Housing
Mounting	3 Hole, 5" Bolt Circle	3 Hole, 5" Bolt Circle	• 5 Year Warranty
Connector	2 Leads Blunt Cut, 13"	2 Leads Blunt Cut, 13"	
LEDs	27	18	

5.5" ROUND SURFACE MOUNT LED DOME LIGHTS — THIN PROFILE



PART NUMBER	DESCRIPTION		
M84443	450 LUMENS DOME LIGHT		
M84442	320 LUMENS DOME LIGHT		
M50136	OPTIONAL CHROME BEZEL		
SPECIFICATION	M84443	M84442	
Lumens	450	320	• Ultra Thin Profile
Voltage	12.8VDC	12.8VDC	• Includes White Bezel
Amp Draw	430mA	370mA	• Optional Chrome Bezel
Dimensions	5.7" Diam. x 0.4" D	5.7" Diam x 0.4" D	• Polycarbonate Lens & Housing
Mounting	3 Hole, 5" Bolt Circle	3 Hole, 5" Bolt Circle	• 5 Year Warranty
Connector	2 Leads Blunt Cut, 12"	2 Leads Blunt Cut, 12"	
LEDs	36	27	

IMPROVED

6" ROUND SURFACE MOUNT RED/WHITE LED DOME LIGHT WITH ON/OFF SWITCH

5



PART NUMBER	DESCRIPTION	
M84434RW-A	RED/WHITE DOME LIGHT WITH ON/OFF SWITCH	
Lumens	200 (White)	• 3 Position Rocker Switch
Voltage	12.8VDC	White/Off/Red
Amp Draw	240mA White / 300mA Red	• 200 Lumens (White)
Dimensions	5.9" Diam. x 1.2" Depth	• Polycarbonate Lens
Mounting	3 Hole Surface, 5" Bolt Circle	• Aluminum Housing
Connector	2 Leads Blunt Cut, 12"	• Wire Channel Guide for Flat Surface Mounting
LEDs	48 (24 Red / 24 White)	• 5 Year Warranty

6" ROUND SURFACE MOUNT RED/WHITE LED DOME LIGHT

5



PART NUMBER	DESCRIPTION	
M84435RW	RED/WHITE DOME LIGHT 3-WIRE	
Lumens	135 (White)	• Discrete Wires for User-Supplied Switch
Voltage	12.8VDC	• 135 Lumens (White)
Amp Draw	110mA White / 160mA Red	• Polycarbonate Lens & Housing
Dimensions	5.9" Diam. x 1.0" Depth	• 5 Year Warranty
Mounting	3 Hole Surface, 5" Bolt Circle	
Connector	3 Leads Blunt Cut, 12"	
LEDs	48 (24 Red / 24 White)	

6" ROUND SURFACE MOUNT LED DOME LIGHTS

5

12/24
VOLTAGE

PART NUMBER	DESCRIPTION	
M84434-A	1,400/600 LUMENS DOME LIGHT WITH ON/OFF SWITCH	
Lumens	1,400 HI / 600 LO	• 1,400 Lumens
Voltage	12/24VDC	• Three Position HI/OFF/LO Rocker Switch
Amp Draw	12V: 1.4A HI / 0.5A LO	• Dual Voltage 12/24VDC
Dimensions	5.9"Diam. x 1.2" Depth	• Polycarbonate Lens & Aluminum Housing
Mounting	3 Hole Surface, 5" Bolt Circle	• Wire Channel Guide for Flat Surface Mounting
Connector	2 Leads Blunt Cut, 12"	• 5 Year Warranty
LEDs	42	

PART NUMBER	DESCRIPTION	
M84435-A	1,400 LUMENS DOME LIGHT	
Lumens	1,400	• 1,400 Lumens
Voltage	12/24VDC	• Dual Voltage 12/24VDC
Amp Draw	1.5A	• Polycarbonate Lens & Aluminum Housing
Dimensions	5.9"Diam. x 1.2" Depth	• Wire Channel Guide for Flat Surface Mounting
Mounting	3 Hole Surface, 5" Bolt Circle	• 5 Year Warranty
Connector	2 Leads Blunt Cut, 12"	
LEDs	42	

NEW

5 YEAR WARRANTY

8" ROUND FLUSH MOUNT 1,400 / 300 LUMENS LED DOME LIGHTS



PART NUMBER DESCRIPTION

M84448 8" DOME LIGHT, HI/LO – WHITE FLANGE

M84449 8" DOME LIGHT, HI/LO, BRUSHED ALUM. W/ 3CCT

Lumens	1,400 HI / 300 LO	• HI/LO – 1,400 / 300 Lumens
Voltage	12.8VDC	• Direct Replacement for Many Popular Ambulance Lights
Amp Draw	1.0A / 0.2A	• 3 Discrete Wires for HI/LO Switch
Dimensions	8.6" Diam x 0.56" D	• Available in White or Alum. Flange
Mounting	4 Hole Flush, 8" Bolt Circle, 7.3" Cutout	• M84449: 3-pos. CCT Switch, Selectable Color Temp. 3,000K, 4,000K, 5,000K
Connector	3 Pin, Rectangular AMP-Style Mate-N-Lock Connector, 7" Lead	• Universal 8" Bolt Pattern
LEDs	51 (M84448) 102 (M84449)	• Frosted Lens – No Hot Spots
		• Polycarbonate Lens
		• Aluminum Housing
		• 5 Year Warranty

3" ROUND LOW PROFILE 150 LUMENS SURFACE MOUNT LED INTERIOR LIGHT

5 YEAR WARRANTY



PART NUMBER DESCRIPTION

M84441 150 LUMENS INTERIOR LIGHT

M8441-X 150 LUMENS INTERIOR LIGHT – BULK PACK

M50135 OPTIONAL CHROME BEZEL

Lumens	150	• Ultra Thin Profile
Voltage	12.8VDC	• Includes White Bezel
Amp Draw	250mA	• Optional Chrome Bezel
Dimensions	3.0" Diam. x 0.3" D	• Polycarbonate Lens & Housing
Mounting	4 Hole Surface	• 5 Year Warranty
Connector	2 Leads Blunt Cut, 12"	
LEDs	15	

4" ROUND LOW PROFILE 450 LUMENS 4" GROMMET MOUNT LED DOME LIGHT

5 YEAR WARRANTY



PART NUMBER DESCRIPTION

M84436 450 LUMENS 4" GROMMET MOUNT DOME LIGHT

Lumens	450	• Thin 0.5" Low Profile Design
Voltage	12.8VDC	• Strain Relief Clip
Amp Draw	480mA	• Completely Sealed
Dimensions	4.3" Diam. x 0.5" D	• Polycarbonate Lens & Housing
Mounting	4" Grommet	• 5 Year Warranty
Connector	2 Leads Blunt Cut, 13"	
LEDs	24	

LED INTERIOR LIGHTING

NEW

3" X 6" LED INTERIOR LIGHT HIGH OUTPUT 650 LUMENS



M84427-B



M84427-SW



M84427-PIR

PART NUMBER	DESCRIPTION
M84427-B	650 LUMENS DOME LIGHT
M84427-SW	650 LUMENS DOME LIGHT WITH ON/OFF SWITCH
M84427-PIR	650 LUMENS DOME LIGHT WITH PIR SENSOR

Lumens	650
Voltage	12/24VDC
Amp Draw	0.6A 12V / 0.3A 24V
Dimensions	5.8" W x 2.9" H x 0.9" D
Mounting	2 Holes, 4.7" C to C
Connector	2 Leads Blunt Cut, 9"
LEDs	14

- Available in 3 Configurations:
 - Base Model (-B)
 - Illuminated Touch Switch (-SW)
 - PIR Motion Sensor (-PIR)
- Dual Voltage 12/24VDC
- Refrigeration/Moisture Safe
- Polycarbonate Frosted Lens & Housing
- Notched Base for Wire Exit
- 5 Year Warranty

IMPROVED



3" X 6" LED INTERIOR LIGHT 275 LUMENS



PART NUMBER	DESCRIPTION
M84407-C	275 LUMENS DOME LIGHT

Lumens	275
Voltage	12.8VDC
Amp Draw	250mA
Dimensions	5.8" W x 2.9" H x 0.9" D
Mounting	2 Holes, 4.7" C to C
Connector	2 Leads Blunt Cut, 9"
LEDs	14

- Refrigeration/Moisture Safe
- Polycarbonate Frosted Lens & Housing
- Notched Base for Wire Exit
- 5 Year Warranty

1.4" X 6" COMPACT LED INTERIOR LIGHT 260 LUMENS



PART NUMBER	DESCRIPTION
M84446BLK	260 LUMENS DOME LIGHT

Lumens	260
Voltage	12.8VDC
Amp Draw	230mA
Dimensions	5.8" W x 1.4" H x 1.0" D
Mounting	2 Holes, 4-3/4" C to C
Connector	2 Leads Blunt Cut, 15"
LEDs	15


- Compact Design – Only 1.4" Wide
- Compartment Light for Work Vans
- Two Hole Mount – Hidden Screws
- Slotted Base for Cable Routing
- Polycarbonate Lens & Housing
- 5 Year Warranty

14" SURFACE MOUNT LED DOME LIGHT WITH ON/OFF SWITCH



PART NUMBER	DESCRIPTION	
M84400	315 LUMENS DOME LIGHT WITH ON/OFF SWITCH	
Lumens	315	• 3 Position Remote/ON/Off Switch
Voltage	12.8VDC	• 2 Hole Surface Mount
Amp Draw	0.5A	• Low Amp Draw
Dimensions	14.0" W x 3.6" H x 0.7" D	• 5 Year Warranty
Mounting	Two Hole Surface	
Connector	3 Leads Blunt Cut, 7"	
LEDs	50	

21" SURFACE MOUNT DUAL COLOR RED/WHITE LED DOME LIGHT WITH ON/OFF SWITCH

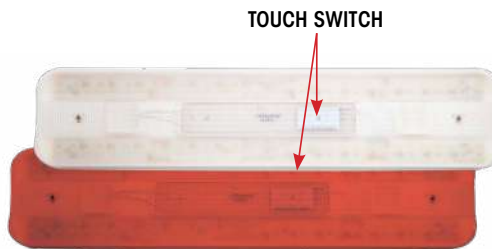


PART NUMBER	DESCRIPTION	
M84438RW	1,000 LUMENS RED/WHITE DOME LIGHT – ON/OFF SWITCH	
Lumens	1,000	• On/Off Touch Switch
Voltage	12.8VDC	• 3-Position Switch Off/Red/White
Amp Draw	1.1A	• Polycarbonate Lens & Housing
Dimensions	21.6" W x 4.7" H x 1.2" D	• 5 Year Warranty
Mounting	Two Hole Surface	
Connector	2 Leads Blunt Cut, 4.5"	
LEDs	24 Red/64 White	

INTERIOR WHITE LED FLAT PANEL LIGHTING — ULTRA THIN DESIGN



PART NUMBER	DESCRIPTION		
M84411-C	4" X 6" 450 LUMENS DOME LIGHT		
M84414-BWW	3" X 3" 80 LUMENS DOME LIGHT – WARM WHITE		
M84414-BCW	3" X 3" 100 LUMENS DOME LIGHT – COOL WHITE		
SPECS	M84411-C	M84414-BWW/BCW	
Lumens	450	80 BWW 100 BCW	• Stack Free LED Design
Voltage	12.8VDC	12.8VDC	• Even Light Dispersion
Amp Draw	0.3A	0.4A	• No Hot Spots
Dimensions	3.9" W x 5.9" H	3.4" W x 3.2" H	• Flat Screen Lens
Depth	0.3"	0.5"	• Ultra Thin 1/2" Design
Mounting	4 Hole Surface	Bracket	• Black Powder Coated Frame
Connector	2 Leads Blunt Cut, 8"	2 Leads Blunt Cut, 9"	• 5 Year Warranty
LEDs	18	12	

23" SURFACE MOUNT LED INTERIOR LIGHT



M84418



M84418-SW

M84418-SW
3-Position Switch

PART NUMBER	DESCRIPTION
M84418	3,000 LUMENS DOME LIGHT CHROME HOUSING
M84418-SW	3,000/1,200 LUMENS DOME LIGHT CHROME HOUSING – 3 POSITION SWITCH
Lumens	
- M84418	3,000
- M84418-SW	3,000 / 1,200
Voltage	12/24VDC
Amp Draw	2.7A 12V / 1.4A 24V
Dimensions	22.8" W x 5.8" H x 1.3" D
Mounting	4 Hole Surface
Connector	2 Leads Blunt Cut, 8"
LEDs	144

- Available in 2 configurations:
 - Chrome Housing
 - Chrome Housing with Switch
- M84418-SW Includes 3-Position HI/OFF/LO Switch
- Bright Cool White Light Output
- Polished Aluminum Housing with Chrome End Caps
- Polycarbonate Frosted Lens
- 5 Year Warranty

23" SURFACE MOUNT LED INTERIOR LIGHT



M84426



M84426-SW



M84426-BLK

M84426-SW
3-Position Switch

PART NUMBER	DESCRIPTION
M84426	2,400 LUMENS DOME LIGHT WHITE HOUSING
M84426-SW	2,400/900 LUMENS DOME LIGHT WHITE HOUSING – 3 POSITION SWITCH
M84426BLK	2,100 LUMENS DOME LIGHT BLACK HOUSING
Lumens	
- M84426	2,400
- M84426-SW	2,400 / 900
- M84426BLK	2,100
Voltage	12/24VDC
Amp Draw	1.8A 12V / 1.0A 24V
Dimensions	22.8" W x 5.8" H x 1.3" D
Mounting	4 Hole Surface
Connector	2 Leads Blunt Cut, 8"
LEDs	216

- Available in 3 configurations:
 - White Housing
 - White Housing with Switch
 - Black Housing
- M84426-SW Includes 3-Position HI/OFF/LO Switch
- Hidden Mounting Screws
- Bright Cool White Light Output
- Polycarbonate Frosted Lens
- 5 Year Warranty

IMPROVED

5


18" FLUSH MOUNT 2,100 LUMENS LED CARGO LIGHT

SIDE VIEW

PART NUMBER	DESCRIPTION	
M84415-B	2,100 LUMENS FLUSH DOME LIGHT	
Lumens	2,100	• Improved to 2,100 Lumens
Voltage	12.8VDC	• Refrigeration / Moisture Safe
Amp Draw	1.9A	• Universal Bolt Holes Replaces Several Popular Brands
Dimensions	18.2" W x 5.3" H x 1.2" D	• Frosted Lens
Mounting	4 Hole Flush Mount	• Polycarbonate Lens & Housing
Connector	2 Leads Blunt Cut, 12"	• 5 Year Warranty
LEDs	60	

IMPROVED

5

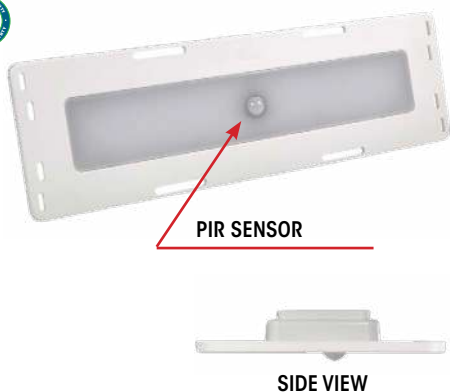18" FLUSH MOUNT 1,700 LUMENS LED CARGO LIGHT WITH PIR SENSOR

PIR SENSOR

SIDE VIEW

PART NUMBER	DESCRIPTION	
M84444-A	1,700 LUMENS FLUSH DOME LIGHT W/ PIR SENSOR	
Lumens	1,700	• Improved to 1,700 Lumens
Voltage	12.8VDC	• PIR Sensor - 3 Minute Timer
Amp Draw	1.5A	• Refrigeration / Moisture Safe
Dimensions	18.2" W x 5.3" H x 1.2" D	• Universal Bolt Holes Replaces Several Popular Brands
Mounting	4 Hole Flush Mount	• Frosted Lens
Connector	2 Leads Blunt Cut, 12"	• Polycarbonate Lens & Housing
LEDs	48	• 5 Year Warranty

NEW

5

2" X 2-3/4" 450 LUMENS FORD TRANSIT REPLACEMENT LED DOME LIGHT

SIDE VIEW

PART NUMBER	DESCRIPTION	
M84455	2" x 2-3/4" DOME LIGHT FORD TRANSIT REPLACEMENT	
Lumens	450	• Direct Replacement for Ford Transit or Similar
Voltage	12.8VDC	• 450 Lumens
Amp Draw	0.4A	• Easy Snap-In Mount
Dimensions	2.8" L x 2" W x 1.1" D	• Polycarbonate Lens & Aluminum Heat Sink
Mounting	Snap-In, 2.4" x 1.3" Cutout	• 5 Year Warranty
Connector	2 Spade Connectors, 0.25"	
LEDs	18	

LOW PROFILE LED RIGID LINEAR STRIP LIGHTS



M84454



M84450



M84451



M84451



M84452



M84453

PART NUMBER	M84454	M84450	M84451	M84452	M84453
DESCRIPTION	12" RIGID STRIP	18" RIGID STRIP	24" RIGID STRIP	36" RIGID STRIP	48" RIGID STRIP
Lumens	470	650	900	1,400	1,800
Voltage	12.8VDC	12.8VDC	12.8VDC	12.8VDC	12.8VDC
Amp Draw	0.6A	0.8A	1.2A	1.7A	2.0
Length	13.4" L	19.2" L	25.3" L	37.1" L	48.8" L
W x D	0.9" W x 0.4" D	0.9" W x 0.4" D	0.9" W x 0.4" D	0.9" W x 0.4" D	0.9" W x 0.4" D
Mounting	13" C to C	18-7/8" C to C	24-3/4" C to C	36-9/16" C to C	48-3/8" C to C
Connector	2 Wires Blunt Cut, 6"	2 Wires Blunt Cut, 6"	2 Wires Blunt Cut, 6"	2 Wires Blunt Cut, 6"	2 Wires Blunt Cut, 6"
LEDs	36	48	72	101	144

FEATURES

- Available in 5 Popular Sizes
- Frosted Lens with Wide Beam Angle
- Aluminum Base
- Ultra Low Profile Design
- ABS Body & Polycarbonate Lens
- 5 Year Warranty

NEW

45 DEGREE ANGLED LED RIGID LINEAR STRIP LIGHTS



45 Degree Light Output



PART NUMBER	M84456-D	M84457-D	M84458-D	M84459-D	M84460-D
DESCRIPTION	12" STRIP	18" STRIP	24" STRIP	36" STRIP	48" STRIP
Lumens	600	800	1,100	1,600	2,000
Voltage	12.8VDC	12.8VDC	12.8VDC	12.8VDC	12.8VDC
Amp Draw	0.6A	0.8A	1.2A	1.7A	2.0A
Length	13.4" L	19" L	25.3" L	37.1" L	48.4" L
W x D	0.6" W x 0.6" H	0.6" W x 0.6" H	0.6" W x 0.6" H	0.6" W x 0.6" H	0.6" W x 0.6" H
Mounting	3M Tape	3M Tape	3M Tape	3M Tape	3M Tape
Connector	DT04, 3.8"	DT04, 3.8"	DT04, 3.8"	DT04, 3.8"	DT04, 3.8"
LEDs	36	48	72	111	144

FEATURES

- Corner-Mounted Rigid LED Strip Lights
Or Under-Shelf Mounted
- 3M Tape Included, Not Attached
Can Be Applied to One Side or Both
- Frosted Lens with Wide Beam Angle
- Deutsch-Style DT04 Connector
- ABS Body, Polycarbonate Lens, Aluminum Base
- 5 Year Warranty

24" LED RIGID RIGID LINEAR STRIP LIGHTS



PART NUMBER	DESCRIPTION
M84424-B	24" RIGID STRIP
Lumens	500
Voltage	12.8VDC
Amp Draw	0.7A
Dimensions	25.1" L x 0.6" W x 0.9" H
Mounting	2 Hole 24-3/4" C to C
Connector	2 Leads Blunt Cut, 6"
LEDs	71

- Wide Beam Angle
- Frosted Lens Cover
- Polycarbonate Lens
- Aluminum Base
- 5 Year Warranty

LED INTERIOR LIGHT WITH ADJUSTABLE HOOD



FEATURES

- 2 Hole Surface Mount Design
- Polished Adjustable Aluminum Reflector
- Low LED Amp Draw
- 5 Year Warranty

PART NUMBER	DESCRIPTION	M844280-A	M844280-A-D	M84403-A	M84403-A-D	M84404-A
Lumens		700	700	500	500	300
Voltage		12.8VDC	12.8VDC	12.8VDC	12.8VDC	12.8VDC
Amp Draw		1.2A	1.2A	0.7A	0.7A	0.4A
Dimensions		19.8" L x 1.4" W x 0.9" H	19.8" L x 1.4" W x 0.9" H	13.9" L x 1.4" W x 0.9" H	13.9" L x 1.4" W x 0.9" H	8.0" L x 1.4" W x 0.9" H
Mounting		2 Hole Surface	2 Hole Surface	2 Hole Surface	2 Hole Surface	2 Hole Surface
Connector		2 Leads Blunt Cut, 12"	2 Leads Deutsch, 12"	2 Leads Blunt Cut, 12"	2 Leads Deutsch, 12"	2 Leads Blunt Cut, 12"
LEDs		36	36	24	24	12

19" LED INTERIOR LIGHT CHROME POLYCARBONATE HOUSING



PART NUMBER	DESCRIPTION
M844280B-CH	600 LUMENS INTERIOR LIGHT
Lumens	600
Voltage	12.8VDC
Amp Draw	0.7A
Dimensions	18.9" L x 1.6" W x 0.9" H
Mounting	2 Hole Surface
Connector	2 Leads Blunt Cut, 12"
LEDs	54

- Efficient / Affordable Interior Lighting
- Light Refraction Lens Material
- Polycarbonate Lens
- Chrome Polycarbonate Housing
- Refrigeration Safe
- 5 Year Warranty

19" LED INTERIOR LIGHT WITH ON/OFF SWITCH



PART NUMBER	DESCRIPTION
M844282-A	550 / 250 LUMENS CARGO LIGHT
Lumens	550 HI / 250 LO
Voltage	12.8VDC
Amp Draw	0.9A HI / 0.4A LO
Dimensions	19.4" L x 2.4" W x 1.1" H
Connector	2 Jacketed Leads Blunt Cut, 15"
LEDs	36

- 360-degree Swivel Base
- 3-Position Switch HI/OFF/LO
- 5 Year Warranty

NEW

MSLS-SERIES FLEXIBLE SILICONE LED STRIP LIGHTS

5 YEAR WARRANTY



SPECIFICATIONS

Voltage

12.8VDC

Dimensions

Length (as shown)
x 0.4" W x 0.16" H

Mounting

3M Adhesive Tape

FEATURES

- Soft Super Flexible Silicone Jacket
- White Strip Lights Feature a White PCB Board
- Red, Blue, Amber Colored Strips Feature a Black PCB Board
- Also Available in Bulk Pack (-X)
- Available in a Variety of Lengths
- Easy to install 3M adhesive tape mount
- 5 Year Warranty
- 2 Year Warranty if Applied to Exterior Surfaces

PART NUMBER	COLOR	DESCRIPTION	LENGTH	LEDs	LUMENS	AMP DRAW	CONNECTOR
MSLS-1218	White	Silicone Strip Light	12"	18	270	0.4A	2 Leads Blunt Cut, 5.5"
MSLS-1827	White	Silicone Strip Light	18"	27	410	0.5A	2 Leads Blunt Cut, 5.5"
MSLS-1827-DT04	White	Silicone Strip Light	18"	27	410	0.5A	2 Leads Deutsch-style, 5.5"
MSLS-2436	White	Silicone Strip Light	24"	36	550	0.7A	2 Leads Blunt Cut, 5.5"
MSLS-2436-DT04	White	Silicone Strip Light	24"	36	550	0.7A	2 Leads Deutsch-style, 5.5"
MSLS-3654	White	Silicone Strip Light	36"	54	825	1.0A	2 Leads Blunt Cut, 5.5"
MSLS-3654-DT04	White	Silicone Strip Light	36"	54	825	1.0A	2 Leads Deutsch-style, 5.5"
MSLS-4569	White	Silicone Strip Light	45"	69	1,050	1.3A	2 Leads Blunt Cut, 5.5"
MSLS-78120	White	Silicone Strip Light	78"	120	1,830	2.3A	2 Leads Blunt Cut, 5.5"
MSLS-2436R	Red	Silicone Strip Light	24"	36	N/A	0.5A	2 Leads Blunt Cut, 5.5"
MSLS-196300R	Red	Silicone Strip Light	196"	300	N/A	3.1A	2 Leads, .180 Bullets, 54"
MSLS-2436Y	Amber	Silicone Strip Light	24"	36	N/A	0.8A	2 Leads Blunt Cut, 5.5"
MSLS-3654Y	Amber	Silicone Strip Light	36"	54	N/A	1.2A	2 Leads Blunt Cut, 5.5"
MSLS-196300Y	Amber	Silicone Strip Light	196"	300	N/A	3.1A	2 Leads, .180 Bullets, 54"

NEW

MLS FLEXIBLE LED "GLOW" STRIPS

2 YEAR WARRANTY



Optional Hold-Down Clamp

PART NUMBER	DESCRIPTION
MLS-G1020	WHITE LED ADHESIVE GLOW STRIP, 20"
MLS-G1020R	RED LED ADHESIVE GLOW STRIP, 20"
MLS-G1020Y	AMBER LED ADHESIVE GLOW STRIP, 20"
MLS-G1040	WHITE LED ADHESIVE GLOW STRIP, 40"
MLS-G1040R	RED LED ADHESIVE GLOW STRIP, 40"
MLS-G1040Y	AMBER LED ADHESIVE GLOW STRIP, 40"
LUMENS (White)	80 (20"), 160 (40")
Voltage	12.8V
Amp Draw	
- 20"	0.5A (W), 0.4A (R), 0.6A (Y)
- 40"	1.0A (W), 0.8A (R), 1.3A (Y)
Dimensions	
- 20"	20" L x 0.65" W x 0.4"
- 40"	40" L x 0.65" W x 0.4"
Mounting	3M Adhesive Tape or Hold-Down Clamps
Connector	2 Wires Blunt Cut, 10"
LEDs	120 (20"), 240 (40")
Legal Heading	P2 P3
DOT / SAE	J592, J2042


- Adhesive Mount LED Glow Strips
- Optional Hold-Down Clamps Included
- Available in White, Red, or Amber
- Red and Amber DOT Compliant P2 P3 Clearance Markers
- Available in 20 inch or 40 inch
- PVC Lens and Housing
- 2 Year Warranty

NEW


5 YEAR WARRANTY

MLS-SERIES FLEXIBLE PVC JACKETED LED STRIP LIGHTS

NOW AVAILABLE IN ADDITIONAL LENGTHS

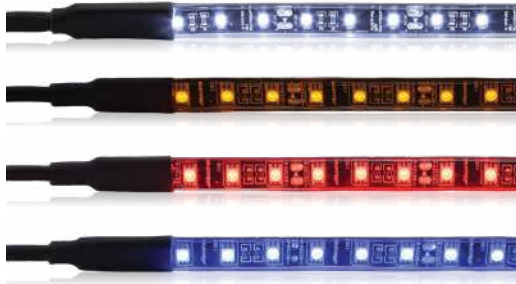

MOUNTING KIT



RETAIL PACKAGE

MLS-Series Flexible PVC-Jacketed LED Adhesive Strip Lights offer excellent illumination for tool box compartments, cargo and work spaces, auxiliary warning, and much more. With easy to install 3M adhesive tape, Maxxima MLS-Series Strips can be applied to any clean surface. The PVC Jacketing offers the best protection for the most severe-duty applications. MLS-Series are available in a variety of lengths and five colors.

SPECIFICATIONS


Voltage	12.8VDC	• Available in White, Warm White, Blue, Red, and Amber	• PVC Outer Jacket
Dimensions	Length (as shown) x 0.5" W x 0.2" D	• Available in a variety of sizes as shown below from 18" to 196" lengths	• Wire Strain Relief
Mounting	3M Adhesive Tape	• Red, Blue and Amber available in 18", 24" and 36"	• Easy to Install 3M Adhesive Tape
		• Mounting Kit Included	• Completely Sealed Moisture Proof Electronics
		• Retail Packaging	• 5 Year Warranty
		• Also Available in Bulk Pack (-X)	— 2 Year Warranty if Applied to Exterior Surfaces

	PART NUMBER	COLOR	DESCRIPTION	LENGTH	LEDs	LUMENS	AMP DRAW	CONNECTOR
NEW	MLS-1015-AD	White	LED Adhesive Strip Light	10"	15	260	0.35A	2 Leads with Deutsch-Style, 10"
	MLS-1827-A	White	LED Adhesive Strip Light	18"	27	300	0.5A	2 Leads Blunt Cut, 9.5"
	MLS-1827WW-A	Warm White	LED Adhesive Strip Light	18"	27	369	0.5A	2 Leads Blunt Cut, 9.5"
	MLS-2436-A	White	LED Adhesive Strip Light	24"	36	408	0.7A	2 Leads Blunt Cut, 9.5"
	MLS-2436-AD	White	LED Adhesive Strip Light	24"	36	408	0.7A	2 Leads with Deutsch-Style, 10"
	MLS-2436WW-A	Warm White	LED Adhesive Strip Light	24"	36	492	0.7A	2 Leads Blunt Cut, 9.5"
	MLS-3654-A	White	LED Adhesive Strip Light	36"	54	612	1.1A	2 Leads Blunt Cut, 9.5"
	MLS-3654WW-A	Warm White	LED Adhesive Strip Light	36"	54	738	1.1A	2 Leads Blunt Cut, 9.5"
	MLS-4569-A	White	LED Adhesive Strip Light	45"	69	782	1.4A	2 Leads Blunt Cut, 11"
	MLS-76114W-MC	White	LED Adhesive Strip Light	76"	114	1,300	2.1A	2 Leads .180 Bullets, 54"
	MLS-78120-AD	White	LED Adhesive Strip Light	78"	120	1,360	2.4A	2 Leads with Deutsch-style, 10"
	MLS-92141W-MC	White	LED Adhesive Strip Light	92"	141	1,600	2.4A	2 Leads .180 Bullets, 54"
	MLS-96147W-MC	White	LED Adhesive Strip Light	96"	147	1,600	2.4A	2 Leads .180 Bullets, 54"
	MLS-1827BL	Blue	LED Adhesive Strip Light	18"	27	N/A	0.6A	2 Leads Blunt Cut, 9.5"
	MLS-2436BL	Blue	LED Adhesive Strip Light	24"	36	N/A	0.7A	2 Leads Blunt Cut, 9.5"
	MLS-3654BL	Blue	LED Adhesive Strip Light	36"	54	N/A	1.1A	2 Leads Blunt Cut, 9.5"
	MLS-1827R	Red	LED Adhesive Strip Light	18"	27	N/A	0.6A	2 Leads Blunt Cut, 9.5"
	MLS-2436R	Red	LED Adhesive Strip Light	24"	36	N/A	0.7A	2 Leads Blunt Cut, 9.5"
	MLS-3654R	Red	LED Adhesive Strip Light	36"	54	N/A	1.1A	2 Leads Blunt Cut, 9.5"
	MLS-196300R-MC	Red	LED Adhesive Strip Light	196"	300	N/A	2.3A	2 Leads .180 Bullets, 54"
	MLS-1827Y	Amber	LED Adhesive Strip Light	18"	27	N/A	0.6A	2 Leads Blunt Cut, 9.5"
	MLS-2436Y	Amber	LED Adhesive Strip Light	24"	36	N/A	0.7A	2 Leads Blunt Cut, 9.5"
	MLS-3654Y	Amber	LED Adhesive Strip Light	36"	54	N/A	0.7A	2 Leads Blunt Cut, 9.5"
	MLS-3654WYCL	White/Amber	LED Adhesive Strip Light	36"	54	300	0.8A	3 Leads Blunt Cut, 6.5"

SWITCHED MLS-SERIES FLEXIBLE PVC-JACKETED LED STRIP LIGHTING



Illuminated Switch
Blue in standby, red when on

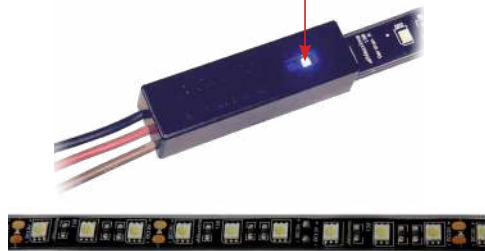

PART NUMBER	DESCRIPTION
MLS-1827-A-SW	18" WITH ON/OFF SWITCH
MLS-2436-A-SW	24" WITH ON/OFF SWITCH
MLS-4569-A-SW	45" WITH ON/OFF SWITCH
Voltage	12.8VDC
Amp Draw	
- MLS-1827-A-SW	0.4A
- MLS-2436-A-SW	0.6A
- MLS-4569-A-SW	1.1A
Dimensions*	Length (as shown) x 0.5" W x 0.2" D
Mounting	3M Adhesive Tape
Connector	3 Leads Blunt Cut, 7"
*Length does not include switch	

- Third Wire for Optional Door Control
- Cool White For Best Illumination
- Available in 18", 24" and 45" Lengths
- 5 Year Warranty
- 2 Year Warranty if Applied to Exterior Surfaces

MLS-SERIES DOUBLE ROW LED STRIP LIGHTING — BULK PACK ONLY



PART NUMBER	DESCRIPTION
MLS-D36216-X	WHITE DOUBLE ROW LED ADHESIVE STRIP LIGHT 36"
Lumens	950
Voltage	12.8VDC
Amp Draw	1.4A
Dimensions	0.6" W x 0.2" H
Mounting	3M Adhesive Tap
Connector	2 Leads Blunt Cut, 8"
LEDs	216

- Space Saving Low Profile Design
- Easy to Install 3M Adhesive Tape
- Bulk Pack Only
- 5 Year Warranty
- 2 Year Warranty if Applied to Exterior Surfaces

MSLS-LINKABLE FLEXIBLE SILICONE LED STRIP LIGHTS



MSLS-1827LNK



MSLS-TLINK



MSLS-STKIT



MSLS-SL6

PART NUMBER	DESCRIPTION
MSLS-1827LNK	LINKABLE ADHESIVE STRIP LIGHT 18", 27 LEDS
MSLS-2436LNK	LINKABLE ADHESIVE STRIP LIGHT 24", 36 LEDS
MSLS-TLINK	MOLDED T-LINK
MSLS-SL6	SHORT LINK 6"
MSLS-ML9	MEDIUM LINK 9"
MSLS-STKIT	MALE & FEMALE STARTER KIT
Voltage	12.8VDC
Amp Draw	
- MSLS-1827LNK	0.4A
- MSLS-2436LNK	0.5A
Dimensions	
- MSLS-1827LNK	26" x 0.5"
- MSLS-2436LNK	36" x 0.5"
- MSLS-SL6	6" x 0.5"
- MSLS-ML9	9" x 0.5"
Mounting	3M Adhesive Tape
Connector	Plug in connector
LEDs	
- MSLS-1827LNK	27
- MSLS-2436LNK	36

- Linkable LED Strip Lights include molded end caps
- Light runs up to 33 feet using the T-LINK
- Interior/exterior use—IP-67 Rating
- Easy routing on tight corners using short links
- Easy to Install 3M Self Adhesive Backing
- 5 Year Warranty
- 2 Year Warranty if Applied to Exterior Surfaces

2" X 4" LED INTERIOR COURTESY



Optional M42206-ADHESIVE Tape

PART NUMBER	DESCRIPTION
M42206	2" X 4" SURFACE OR TAPE MOUNT
M42206-X	2" X 4" SURFACE MOUNT OR TAPE – BULK PACK
M42206-ADHESIVE	OPTIONAL MOUNTING TAPE
Lumens	165
Voltage	12.8VDC
Amp Draw	240mA
Dimensions	4.6" W x 2.4" H x 0.4" D
Mounting	2 Hole or 3M Adhesive Tape
Connector	2 Leads Blunt Cut, 6"
LEDs	14

- Screw Mount or Optional 3M Tape Mount Sold Separately
- Ultra Thin 0.4" Low Profile Design
- Polycarbonate Lens & Housing
- Completely Sealed Electronics
- 2 Caps to Cover Screws
- 5 Year Warranty

2-1/2" ROUND LED INTERIOR COURTESY



PART NUMBER	DESCRIPTION
M11300WCL-A	2-1/2" GROMMET MOUNT
Lumens	90
Voltage	12.8VDC
Amp Draw	80mA
Dimensions	2.5" Diam. x 0.7" Depth
Mounting	Grommet
Connector	PL-10
LEDs	13

- Fits Standard 2-1/2" Grommet
- Polycarbonate Lens & Housing
- Solid State Circuit Board
- 10 Year Warranty

4" X 0.6" LED INTERIOR COURTESY



PART NUMBER	DESCRIPTION
M20341WCL	4" X 0.6" 2-HOLE MOUNT
Lumens	45
Voltage	12.8VDC
Amp Draw	100mA
Dimensions	4.0" W x 0.6" H x 1.1" D
Mounting	19/32" Mounting Hole Required
Connector	2 Leads .180 Bullet, Ring, 6"
LEDs	7

- Standard 3" Mounting Holes
- Polycarbonate Lens & Housing
- Sealed Moisture Proof Electronics
- 5 Year Warranty

3/4" LED INTERIOR COURTESY



BCL On | BCL Off



WCL

With Optional
M50112 Bezel

PART NUMBER	DESCRIPTION
M09300BCL	BLUE CLEAR LENS
M09300G	GREEN
M09300WCL	WHITE
M50112	STAINLESS STEEL BEZEL
M50133	STANDARD GROMMET ONLY
M50125	WIDE CHANNEL GROMMET

Lumens	40 (White)
Voltage	12.8VDC
Amp Draw	20mA
Dimensions	3/4" Diam.
Mounting	Grommet – 3/4" Hole Cutout
Connector	2 Leads .180 Bullets, 7"
LEDs	3

- 3/4" Mini Courtesy Light
- Retail Packaging
- Polycarbonate Lens/Housing
- Grommet Included
- Optional M50112 Stainless Bezel
- Interior or Exterior Mount
- 5 Year Warranty

3/4" LED INTERIOR COURTESY — BULK PACK ONLY



Lightning

With Optional
M50112 Bezel

PART NUMBER	DESCRIPTION
M09330WCL-X	WHITE BULLET CONNECTOR
M50112	STAINLESS STEEL BEZEL

Lumens	35
Voltage	12.8VDC
Amp Draw	60mA
Dimensions	0.75" Diam.
Mounting	3/4" Hole
Connector	2 Leads .180 Bullets, 7"
LED	1

- 3/4" Mini Courtesy Light
- Bulk Pack Only
- Patented Lightning Lens Optics
- US Patent Number 8,009,364
- US Patent NO.8,717,679 B2
- Polycarbonate Lens & Housing
- Grommet Included
- Optional M50112 Stainless Bezel
- Interior or Exterior Mount
- 5 Year Warranty

1.25" ROUND LED INTERIOR COURTESY — 3/4" MOUNT



Lightning

With Optional
M50118 Bezel

PART NUMBER	DESCRIPTION
M09410WCL	WHITE
M50118	STAINLESS STEEL BEZEL
M50132	BLACK GROMMET

Lumens	20
Voltage	12.8VDC
Amp Draw	20mA
Dimensions	1-1/4" Diam.
Mounting	3/4" Hole
Connector	Grommet 3/4" Hole or Tape Mount
LEDs	2 Leads .180 Bullets, 7"
	Connectors 7" Leads
	6

- 1-1/4" Round Courtesy Light
- Patented Lightning Lens Optics
- US Patent No. 8,009,364
- US Patent No. 8,717,679 B2
- Polycarbonate Lens & Housing
- Includes Grommet & 3M Tape
- Optional M50118 Stainless Bezel
- Interior or Exterior Mount
- 5 Year Warranty

1.25" ROUND LED INTERIOR COURTESY — 1-3/8" MOUNT



Lightning



BCL On | BCL Off



WCL



Optional M50118 Bezel

PART NUMBER	DESCRIPTION
M09400BCL	BLUE CLEAR LENS
M09400G	GREEN
M09400WCL	WHITE
M50118	STAINLESS STEEL BEZEL
M50132	BLACK GROMMET

Lumens	70 (White)
Voltage	12.8VDC
Amp Draw	40mA
Dimensions	1-1/4" Diam.
Mounting	Grommet – 1-3/8" Hole Cutout
Connector	2 Leads .180 Bullets, 7"
LEDs	6

- 1-1/4" Round Courtesy Light
- Patented Lightning Lens Optics
- US Patent No. 8,009,364
- US Patent No. 8,717,679 B2
- Polycarbonate Lens/Housing
- Grommet Included
- Optional M50118 Stainless Bezel
- Interior or Exterior Mount
- 5 Year Warranty

1.60" MINI RECTANGLE LED INTERIOR COURTESY



PART NUMBER	DESCRIPTION
M09360BCL	MINI RECTANGLE – BLUE CLEAR LENS
M09360WCL	MINI RECTANGLE – WHITE
Lumens	20 (White) • 1.60" Mini Rectangular
Voltage	12.8VDC • Polycarbonate Lens / Housing
Amp Draw	50mA, 20mA ANX (BCL, G, WCL) • Lightning Lens Optics
Dimensions	1.60" W x 0.8" H x 0.6" D • US Patent Number 8,009,364
Mounting	3M Adhesive Tape • US Patent No. 8,717,679 B2
Connector	2 Leads .180 Bullets, 7" • Self Adhesive Tape Mount
LEDs	3 • Sealed Electronics
	• 5 Year Warranty

1" CHROME MICRO LED INTERIOR COURTESY



PART NUMBER	DESCRIPTION
LCL-3BL	BLUE
LCL-3R	RED
LCL-3CL	WHITE
Lumens	20 (LCL-3CL White) • Interior Use Only
Voltage	12.8VDC • Chrome Housing
Amp Draw	20mA • 1 Year Warranty
Dimensions	1" W x 0.9" H x 0.4" D
Mounting	2 Hole Surface
Connector	2 Leads Blunt Cut
LEDs	3

2.7" STAINLESS STEEL BEZEL LED INTERIOR COURTESY



PART NUMBER	DESCRIPTION
LED-300R	RED
Voltage	12.8VDC • Interior Use Only
Amp Draw	30mA • Stainless Steel Bezel
Dimensions	2.7" W x 1.3" H x 0.6" D • Sealed Electronics
Mounting	2 Hole Surface • 1 Year Warranty
Connector	2 Leads Blunt Cut
LEDs	3

- BACK-UP ALARMS
- BEACONS
- MINI LIGHTBARS
- TRAFFIC DIRECTORS
- SURFACE MOUNT DIRECTIONAL LIGHTS
- 4" & 6" FLASHING WARNING LIGHTS



LED WARNING LIGHTS

M95-SERIES BACK-UP ALARMS



PART NUMBER	DESCRIPTION
M95097	97DB BACK-UP ALARM 12 - 80 VDC MULTI-VOLTAGE
M95102	102DB BACK-UP ALARM 12 - 80 VDC MULTI-VOLTAGE
M95107	107DB BACK-UP ALARM 12 - 80 VDC MULTI-VOLTAGE
M95822	82 - 102DB ADJUSTABLE BACK-UP ALARM 12 - 80 VDC MULTI-VOLTAGE

Voltage	12 - 80 VDC Multi-Voltage	• SAE J994 Compliant Back-Up Alarms
Amp Draw	MAX 1.0A/12V – 0.5A/24V	• Available in 4 Models: Fixed 97dB, 102dB, 107dB, And Self-Adjusting from 82dB to 102dB
Dimensions	4.0" W x 2.8" H x 1.6" D	• Self-Grounding Mounting Base
Mounting	2 Hole Surface 3.25" C to C	• 12 - 80 VDC Multi-Voltage
Connector	2 Studs	• Temperature Range -40 °F to + 185 °F
Legal Heading	Type C, F, or B	• Epoxy-Filled Electronics - Moisture and Dust Resistant
SAE	SAE J994	• Reinforced Nylon Housing
		• Retail Packaging
		• 2 Year Warranty

NEW

M96-SERIES POLY-PHONIC GHOST ALARM, HARD-WIRED



PART NUMBER	DESCRIPTION
M96097	97DB B/U POLY-PHONIC GHOST ALARM HARD-WIRED

Voltage	12 - 80 VDC Multi-Voltage	• SAE J994 Compliant
Amp Draw	0.5A 12V / 0.3A 24V	• Poly-Phonic, "Broad Band Static Noise"
Dimensions	4.0" W x 2.8" H x 1.6" D	• 12 - 80 VDC Multi-Voltage
Mounting	2 Hole Surface, 3.25" C to C	• Wire Strain Relief & Jacketed Cable
Connector	2 Wire Blunt Cut, Jacketed, 38"	• Reinforced Nylon Housing
Legal Heading	Type C	• Retail Packaging
SAE	J994	• 2 Year Warranty

NEW

M97-SERIES BACK-UP ALARMS, HARD-WIRED



PART NUMBER	DESCRIPTION
M97097	97DB B/U ALARM HARD-WIRED 12 - 80 VDC
M97102	102DB B/U ALARM HARD-WIRED 12 - 80 VDC
M97107	107DB B/U ALARM HARD-WIRED 12 - 80 VDC
M97822	82-102DB B/U ALARM, SELF-ADJUSTING HARD-WIRED

Voltage	12 - 80 VDC Multi-Voltage	• SAE J994 Compliant
Amp Draw	MAX 0.4A 12V / 0.2A 24V	• Available in 4 Models: Fixed 97dB, 102dB, 107dB And Self-Adjusting from 82dB to 102dB
Dimensions	4.0" W x 2.8" H x 1.6" D	• 12 - 80 VDC Multi-Voltage
Mounting	2 Hole Surface, 3.25" C to C	• Wire Strain Relief & Jacketed Cable
Connector	2 Wire Blunt Cut, Jacketed, 11"	• Reinforced Nylon Housing
Legal Heading	Type C, F, or B	• Retail Packaging
SAE	J994	• 2 Year Warranty

M42730Y FULL SIZE 6" CLASS 1 LED AMBER FLASHING WARNING BEACON



PART NUMBER	DESCRIPTION	
M42730Y	WARNING BEACON AMBER LED 6"	
Voltage	12/24VDC	• SAE Class 1 Amber LED Beacon
Amp Draw	2.2A 12V / 1.1A 24V	• 11 Selectable Flash Patterns
Dimensions	6.5" Diam. x 5.4" H	• Permanent Mount
Mounting	3 Hole Surface, 5.9" Bolt Circle	• Mounting Screws Included
Connector	3 Jacketed Leads, Blunt Cut, 22"	• Polycarbonate Lens & Housing
LEDs	64	• 5 Year Warranty
Legal Heading	W3-1	
SAE	J845 Class 1A	

NEW

M42740Y FULL SIZE 6" CLASS 1 LED WARNING BEACON — MEDIUM DOME



Built In Pipe Mount

PART NUMBER	DESCRIPTION	
M42740Y	WARNING BEACON AMBER LED, CLASS 1, 4.6" HEIGHT	
Voltage	12 - 48 VDC Multi-Voltage	• SAE Class 1 LED Warning Beacon
Amp Draw	1.5A 12V / 0.8A 24V	• 12 Programmable Flash Patterns
Dimensions	6.4" Diam. x 4.6" H	• 12 - 48 VDC Multi-Voltage
Mounting	3 Hole Surface, 6" Bolt Circle	• Industry Standard 3-Bolt Pattern
Connector	3 Wire Blunt Cut, 12"	• Includes 1-1/4" Pipe Mount in Base
LEDs	48	• Polycarbonate Dome & Aluminum Base
Legal Heading	W3-1	• Retail Packaging
SAE	J845 Class 1A	• 5 Year Warranty

NEW

M42741Y FULL SIZE 6" CLASS 1 LED WARNING BEACON — TALL DOME



PART NUMBER	DESCRIPTION	
M42741Y	WARNING BEACON AMBER LED, CLASS 1, 6.1" HEIGHT	
Voltage	12 - 48 VDC Multi-Voltage	• SAE Class 1 LED Warning Beacon
Amp Draw	1.8A 12V / 1A 24V	• 12 Programmable Flash Patterns
Dimensions	6.4" Diam. x 6.1" H	• 12 - 48 VDC Multi-Voltage
Mounting	3 Hole Surface, 6" Bolt Circle	• Industry Standard 3-Bolt Pattern
Connector	3 Wire Blunt Cut, 12"	• Includes 1-1/4" Pipe Mount in Base
LEDs	60	• Polycarbonate Dome & Aluminum Base
Legal Heading	W3-1	• Retail Packaging
SAE	J845 Class 1A	• 5 Year Warranty

M42710Y LOW PROFILE 3" CLASS 1 LED AMBER FLASHING WARNING BEACON



PART NUMBER	DESCRIPTION	
M42710Y	WARNING BEACON AMBER LED 3"	
Voltage	12 - 80 VDC	• Compact Size – Only 2.6" Tall
Amp Draw	1.8A / 12V 0.9A / 24V	• SAE Class 1 Amber LED Beacon
Dimensions	3" Diam. x 2.6"H 3.9"W at Mounting Feet	• 12 Selectable Flash Patterns • 12 - 80 VDC Multi-Voltage
Mounting	2 Hole Surface 3-3/8" C to C	• Permanent Mount
Connector	3 Jacketed Leads Blunt Cut, 12"	• Mounting Screws Included
LEDs	20	• Polycarbonate Lens, Cast Aluminum
Legal Heading	W3-1	& PC Housing
SAE	J845 Class 1A	• 5 Year Warranty

M42720Y LOW PROFILE 5" CLASS 1 LED AMBER FLASHING WARNING BEACON



PART NUMBER	DESCRIPTION	
M42720Y	WARNING BEACON AMBER LED 5"	
Voltage	12 - 80 VDC	• SAE Class 1 Amber LED Beacon
Amp Draw	1.5A 12V / 0.6A 24V	• Industry Standard 3 Hole Mount
Dimensions	5.1" Diam. x 3.8"H	• Quad Flash Only – Simple 2 Wire Installation
Mounting	3 Hole Flange, 4-1/2" Bolt Circle	• 12 - 80 VDC Multi-Voltage
Connector	2 Leads Blunt Cut, 7"	• Permanent Mount
LEDs	12	• Polycarbonate Lens, Nylon Base
Legal Heading	SAE W3-1	• 5 Year Warranty
SAE	J845 Class 1A	

IMPROVED

M42705Y 5" CLASS 2 LED AMBER FLASHING WARNING BEACON



PART NUMBER	DESCRIPTION	
M42705Y	AMBER	
Voltage	12 - 80 VDC	• Surface Mount
Amp Draw	200mA	• Quad Flash Only
Dimensions	2.9" Diam. x 4.8"H	• 12 - 80 VDC Multi-Voltage
Mounting	2 Hole Flange	• Permanent Mount
Connector	2 Leads Blunt Cut, 12-1/2"	• Polycarbonate Lens & Housing
LEDs	3	• 5 Year Warranty
Legal Heading	W3-2	
SAE	J845 Class 2A	

NEW

14" X 5.6" MINI LIGHTBAR — AMBER / SMOKED LENS



Includes Cigarette Plug
with on/off and pattern
select switches



PART NUMBER	DESCRIPTION
M20489YSL	AMBER SMOKED LENS MICRO BAR, MAG MOUNT

Voltage	12/24VDC
Amp Draw	5.0A 12V / 3.0A 24V
Dimensions	14.2" L x 5.6" W x 2.5" H
Mounting	Suction Mag Mount
Connector	Cigarette Plug, 15-Foot Cable
LEDs	72
Legal Heading	W3-1
SAE	J845 CLASS 1A

- Compact Micro-Bar, SAE Class 1
- Amber LEDs / Clear Smoked Lens
- 26 Programmable Flash Patterns
- 72 LED
- High Density LEDs Provides Full Coverage with No Individual LEDs Distinguishable
- Vacuum Suction Cup / Magnet Mount
- 15-Foot Cable with Cig. Plug
- 2 Switches: On/Off and Pattern Select
- 5 Year Warranty

14" X 8" MINI LIGHTBAR — CLEAR LENS



M20486YCL



M20486YWCL



Optional Permanent Mount Feet Shown

Includes Cigarette Plug
with on/off and pattern
select switches



PART NUMBER	DESCRIPTION
M20486YCL	AMBER CLEAR LENS
M20486YWCL	AMBER/WHITE SPLIT COLOR – CLEAR LENS

Voltage	12/24VDC
Amp Draw	3.1A 12VDC / 1.5A 24VDC
Dimensions	14.00" L x 8.25" W x 1.75" H
Mounting	Magnetic & Surface Mounting Kits Included
Connector	15' Cable with Cigarette Plug
LEDs	M20486YCL 36 Amber M20486YWCL 18 Amber / 18 White
Legal Heading	W3-1
SAE	J845 Class 1A

- 14" Mini Emergency Warning Bar
- Includes Magnetic Mount & Permanent Mount
- SAE Class 1 Warning Device
- Ten (10) Selectable Flash Patterns
- 5 Year Warranty

NEW



15" X 8" MINI LIGHTBAR — CLEAR LENS



M20488YCL Permanent Mount



M20487YCL Mag Mount



M20488YWCL Permanent Mount




M20487YWCL Mag Mount



M20488GYCL-DC DUAL COLOR GREEN / AMBER - Permanent Mount

M20488-Series Permanent Mount Options

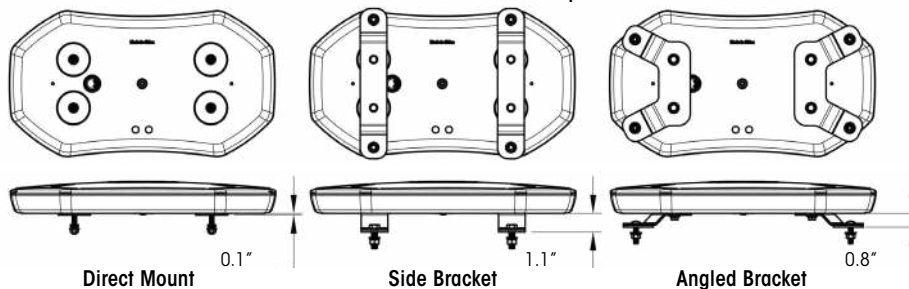

PART NUMBER	DESCRIPTION
M20487YCL	WARNING MINIBAR, AMBER CLEAR LENS, MAG MOUNT
M20487YWCL	WARNING MINIBAR, AMBER / WHITE CLEAR LENS, MAG MOUNT
M20488YCL	WARNING MINIBAR, AMBER CLEAR LENS, PERMANENT MOUNT
M20488YWCL	WARNING MINIBAR, AMBER / WHITE CLEAR LENS, PERMANENT MOUNT
M20488GYCL-DC	WARNING MINIBAR, AMBER/GREEN CLEAR LENS, PERMANENT MOUNT – DUAL COLOR

Voltage	12/24VDC
Amp Draw	4.0A 12V / 2.0A 24V
Dimensions	15.4" L x 8.5" W x 2.2" H
Mounting	
- M20487	Mag Mount
- M20488	4 Hole Surface
Connector	
- M20487	Cig. Plug, 15 ft
- M20488	3 Wire Blunt Cut, 15"
LEDs	80 (160 GYCL-DC)
Legal Heading	W3-1
SAE	J845 Class 1A, CA 13

- 18 Selectable Flash Patterns
- SAE Class 1 & CA 13 Compliant
- Available in All-Amber with Clear Lens or Amber/White Split Color with Clear Lens
- GYCL-DC Green/Amber Model Dual Color (Lights All Green and/or All Amber)
- M20488-Series Includes 3 Mounting Options: Direct Mount, Side Bracket, and Angled Bracket
- Polycarbonate Lens & Housing
- Low Profile Design
- Retail Packaging
- 5 Year Warranty

36" AND 48" LED TRAFFIC DIRECTORS



M20400Y - 36" Traffic Director



M20401Y - 48" Traffic Director



Includes 2 three-position switches



Includes 2 sets of mounting brackets: L-Bracket and Surface Mount



Optional M50920 Sold Separately

PART NUMBER	DESCRIPTION	
	M20400Y 36" TRAFFIC DIRECTOR	M20401Y 48" TRAFFIC DIRECTOR
Voltage	12.8VDC	12.8VDC
Amp Draw	4.0A Max all lamps lit	6.0A Max all lamps lit
Dimensions	36" W x 1.3" H x 1.2" D	48.4" W x 1.3" H x 1.2" D
Mounting	L-Brackets or Surface Mount Brackets	L-Brackets or Surface Mount Brackets
Connector	6-Wire Cable, Blunt Cut, 30 ft	6-Wire Cable, Blunt Cut, 30 ft
LEDs	24	33
Legal Heading	W-1	W-1
SAE	J595 Class 1/CA Title 13	J595 Class 1/CA Title 13

PART NUMBER
M50920 OPTIONAL CONTROL HEAD SOLD SEPARATELY


FEATURES

- SAE J595 Class 1/CA Title 13
- 12 patterns to choose from for Traffic Director Mode and 12 patterns to choose from for Warning Mode
- Includes 2 three-position rocker switches to select Traffic Director Arrow Direction, and Warning Mode Operation
- Includes 2 sets of mounting brackets: L-Bracket Mount and Surface Mount
- Polycarbonate Lens and aluminum housing
- Use switches included or purchase Optional M50920 Control Module sold separately
- Includes 30 Foot Cable
- 5 Year Warranty

DUAL FUNCTION SCENE LIGHT/WARNING LIGHT



2 Lights in one. This Dual Color and Dual Function Light operates as a white scene light and also as a flashing amber/white warning light. Rugged exterior grade.

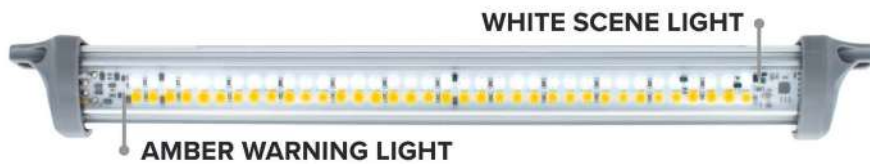

PART NUMBER	DESCRIPTION
M84420YWCL-DC	13" SCENE LIGHT / WARN LIGHT
Voltage	12.8VDC
Amp Draw	0.9A
Dimensions	13" W x 1.4" H x 1.4" D
Mounting	2 Hole 12-9/16" Center to Center
Connector	4 Leads .180 Bullets, 17"
LEDs	72 (36 Amber, 36 White)
Legal Heading	W-1
SAE	J595 Class 1


- 700 Lumens White LED Scene Light/Undercarriage Light
- SAE Class 1 Amber LED Flashing Warning Light
- 28 Selectable Flash Patterns
- Aluminum Housing with Rugged Nylon End Caps
- Polycarbonate Lens
- Exterior Mount/Sealed IP68 Rated
- 3 Year Warranty

NEW

LOW-PROFILE LED SURFACE MOUNT WARNING — TRI COLOR MODELS — 18 LEDS



Available in 5
Different Models /
Color Combinations



With Black Bezel
(Included)

PART NUMBER	DESCRIPTION
M20494YGW-TC	AMBER/GREEN/WHITE TRI COLOR
M20494RGY-TC	RED/GREEN/AMBER TRI COLOR
M20494RYW-TC	RED/AMBER/WHITE TRI COLOR
M20494RWB-TC	RED/WHITE/BLUE TRI COLOR
M20494BYW-TC	BLUE/AMBER/WHITE TRI COLOR

Voltage	12/24VDC	• Available in 5 Models / Color Combinations
Amp Draw	0.8A 12VDC / 0.4A 24VDC	• Each Model Includes 3 Colors in One Light
Dimensions		• Each Color Fills The Whole Light
- Light only	5.6" W x 1.6" H x 0.5" D	• 28 Selectable Flash Patterns
- With Bezel	5.9" W x 1.6" H x 0.5" D	• 7 Selectable Flash Color Options
Mounting	2 Hole Surface, 4.7" C to C	• Up to 11 Programmable "Modes"
Connector	5 Leads Blunt Cut, 7"	• Programmable Dim Feature Available
LEDs	18	• Synchronized & Alternating Patterns
Legal Heading	W-1	• Class 1 & CA Title 13
SAE	J595 Class 1 CA13	• Polycarbonate Lens & Aluminum Housing
		• Low Profile Design
		• 5 Year Warranty

NEW

LOW-PROFILE LED SURFACE MOUNT WARNING — QUAD COLOR MODELS — 24 LEDS



Available in 2
Different Models /
Color Combinations



With Black Bezel
(Included)

PART NUMBER	DESCRIPTION
M20494RBYW-QC	RED/BLUE/AMBER/WHITE QUAD COLOR
M20494RGYW-QC	RED/GREEN/AMBER/WHITE QUAD COLOR

Voltage	12/24VDC	• Available in 5 Models / Color Combinations
Amp Draw	0.8A 12VDC / 0.4A 24VDC	• Each Model Includes 4 Colors in One Light
Dimensions		• Each Color Fills The Whole Light
- Light only	5.6" W x 1.6" H x 0.5" D	• 28 Selectable Flash Patterns
- With Bezel	5.9" W x 1.6" H x 0.5" D	• 15 Selectable Flash Color Options
Mounting	2 Hole Surface, 4.7" C to C	• Up to 11 Programmable "Modes"
Connector	5 Leads Blunt Cut, 7"	• Programmable Dim Feature Available
LEDs	24	• Synchronized & Alternating Patterns
Legal Heading	W-1	• Class 1 & CA Title 13
SAE	J595 Class 1 CA13	• Polycarbonate Lens & Aluminum Housing
		• Low Profile Design
		• 5 Year Warranty

NEW

180-DEGREE SURFACE MOUNT WARNING — AMBER CLEAR LENS



PART NUMBER	DESCRIPTION
M20495YCL	180-DEGREE WARNING LIGHT

Voltage	12/24VDC	• 21 Selectable Flash Patterns
Amp Draw	1.0A 12VDC / 0.5A 24VDC	• SAE J845 Compliant 180-Degrees
Dimensions		• Surface Mount or Bracket Mount
- Light only	3.5" W x 1.4" H x 1.4" D	• Optional Swivel Bracket Included
- With Bracket	4.3" W x 2.4" H x 3.2" D	• Polycarbonate Lens & Aluminum Housing
Mounting	2 Hole Surface, 3.1" C to C	• Sealed Electronics
Connector	4 Leads Blunt Cut, 15"	• 5 Year Warranty
LEDs	12	
Legal Heading	WS3-1 (180°)	
SAE	J845 Class 1S	

5.6" LOW-PROFILE LED SURFACE MOUNT WARNING — DUAL COLOR , SINGLE, OR SPLIT



With Black Bezel

SINGLE COLOR AND SPLIT COLOR MODELS — 6 LEDs

PART NUMBER	DESCRIPTION	Voltage	12/24VDC	• 28 Selectable Flash Patterns
M20389YCL	AMBER 6 LEDs	Amp Draw	0.8A 12VDC / 0.4A 24VDC	• Synchronized & Alternating Patterns
M20389YWCL	AMBER/WHITE 6 LEDs	Dimensions	- Light only 5.6" W x 1.6" H x 0.5" D	• Class 1 & CA Title 13
			- With Bezel 5.9" W x 1.6" H x 0.5" D	• Black Bezel Included
		Mounting	2 Hole Surface, 4.7" C to C	• Polycarbonate Lens & Aluminum Housing
		Connector	4 Leads Blunt Cut, 7"	• Low Profile Design
		LEDs	6	• Sealed Electronics
		Legal Heading	W-1	• 5 Year Warranty
		SAE	J595 Class 1 CA13	



M20389YCL



M20389YWCL

DUAL COLOR MODELS — 12 LEDs

PART NUMBER	DESCRIPTION	Voltage	12/24VDC	• 28 Selectable Flash Patterns
M20389YWCL-DC	AMBER/WHITE 12 LEDs	Amp Draw	0.8A 12VDC / 0.4A 24VDC	• Synchronized & Alternating Patterns
M20389RWCL-DC	RED/WHITE 12 LEDs	Dimensions	- Light only 5.6" W x 1.6" H x 0.5" D	• Class 1 & CA Title 13
M20389GYCL-DC	GREEN/AMBER 12 LEDs		- With Bezel 5.9" W x 1.6" H x 0.5" D	• Black Bezel Included
M20389GWCL-DC	GREEN/WHITE 12 LEDs	Mounting	2 Hole Surface, 4.7" C to C	• Polycarbonate Lens & Aluminum Housing
M20389BYCL-DC	BLUE/AMBER 12 LEDs	Connector	4 Leads Blunt Cut, 7"	• Low Profile Design
M20389BRCL-DC	BLUE/RED 12 LEDs	LEDs	12	• Sealed Electronics
		Legal Heading	W-1	• 5 Year Warranty
		SAE	J595 Class 1 CA13	



M20389YWCL-DC



M20389RWCL-DC



M20389GYCL-DC



M20389GWCL-DC



M20389BYCL-DC



M20389BRCL-DC

MOUNTING ACCESSORIES — ALL M20489-SERIES

PART NUMBER	DESCRIPTION
M50147	CHROME BEZEL
M50121-A	STAINLESS STEEL BRACKET



Optional M50147 Chrome Bezel



Shown with M50121-A sold separately

3.6" LOW-PROFILE 4 LED AND 8 LED SURFACE MOUNT EMERGENCY WARNING



With Black Bezel

SINGLE COLOR MODELS — 4 LEDS

PART NUMBER	DESCRIPTION
M20484YCL	AMBER
M20484WCL	WHITE
M20484RCL	RED
M20484BCL	BLUE



SPLIT COLOR MODELS — 4 LEDS

PART NUMBER	DESCRIPTION
M20484YWCL	AMBER/WHITE SPLIT COLOR
M20484RWCL	RED/WHITE SPLIT COLOR
M20484BRCL	BLUE/RED SPLIT COLOR
M20484GYCL	GREEN/AMBER SPLIT COLOR



DUAL COLOR MODELS — 8 LEDS

PART NUMBER	DESCRIPTION
M20484RYCL-DC	RED/AMBER DUAL COLOR
M20484YWCL-DC	AMBER/WHITE DUAL COLOR
M20484RWCL-DC	RED/WHITE DUAL COLOR
M20484GYCL-DC	GREEN/AMBER DUAL COLOR
M20484GWCL-DC	GREEN/WHITE DUAL COLOR
M20484BYCL-DC	BLUE/AMBER DUAL COLOR



MOUNTING ACCESSORIES — ALL M20484-SERIES

PART NUMBER	DESCRIPTION
M50149	CHROME BEZEL
M50115	STAINLESS STEEL BRACKET



Optional M50149
Chrome Bezel



M50115
Stainless Steel Bracket

Voltage	12.8VDC	• 28 Selectable Flash Patterns
Amp Draw	0.8A	• Synchronized & Alternating Patterns
Dimensions		• 2 Modes allows secondary flash or steady on function (Dual Color Models)
- Light only	3.6" W x 1.4" H x 0.5" D	• Class 1 & CA Title 13
- With Bezel	3.8" W x 1.6" H x 0.5" D	• Black Bezel Included
Mounting	2 Hole Surface, 3.3" C to C	• Polycarbonate Lens & Aluminum Housing
Connector	4 Leads Blunt Cut, 7"	• Low Profile Design
LEDs	4 (Single, Split Color)	• 5 Year Warranty
	8 (Dual Color)	
Legal Heading	W-1 (Single Color, Dual Color)	
	W-2 (Split Color)	
SAE	J595 Class 1 CA13 (Single, Dual Color)	
	J595 Class 2 (Split Color)	

3 LEDS SURFACE MOUNT EMERGENCY WARNING



M50115
Stainless Steel Bracket



M50141/M50142
Black Vinyl Grommets



M50137
Chrome Bezel

PART NUMBER	DESCRIPTION
M20383YCL	AMBER CLEAR LENS
M20383YCL-X	AMBER CLEAR LENS – BULK PACK
M20383WCL	WHITE CLEAR LENS
M20383RCL	RED CLEAR LENS
M50141	BLACK GROMMET
M50142	WIDE CHANNEL BLACK GROMMET
M50137	CHROME BEZEL
M50115	STAINLESS STEEL BRACKET

Voltage	12.8VDC
Amp Draw	200mA
Dimensions	
- Light only	3.5" W x 1.5" H x 0.9" D
- With Bezel	3.8" W x 1.7" H x 1.0" D
Mounting	Surface or Grommet
Connector	4 Leads Blunt Cut, 7"
LEDs	3
Legal Heading	W-1
SAE	J595 Class 1 CA13

- 17 Selectable Flash Patterns
- Class 1 & CA Title 13 Compliant
- Synchronized/Alternating Flash
- Polycarbonate Lens & Aluminum Housing
- Snap-On Black Bezel Included
- Optional Chrome Bezel
- Optional Stainless Steel Bracket
- Optional Grommet
- 5 Year Warranty

4 LEDS SURFACE MOUNT EMERGENCY WARNING — SINGLE AND SPLIT COLOR



M50143/M50144
Black Vinyl Grommets



M50138
Chrome Bezel



M50116
Stainless Steel Bracket

PART NUMBER	DESCRIPTION
M20384YCL	AMBER CLEAR LENS
M20384YCL-X	AMBER CLEAR LENS – BULK PACK
M20384WYCL	WHITE/AMBER CLEAR LENS
M20384WCL	WHITE CLEAR LENS
M20384GYCL	GREEN/AMBER CLEAR LENS
M20384RCL	RED CLEAR LENS
M20384RWCL	RED/WHITE CLEAR LENS
M20384BRCL	BLUE/RED CLEAR LENS
M20384BWCL	BLUE/WHITE CLEAR LENS
M50143	BLACK GROMMET
M50144	WIDE CHANNEL BLACK GROMMET
M50138	CHROME BEZEL
M50116	STAINLESS STEEL BRACKET

Voltage	12.8VDC
Amp Draw	0.7A
Dimensions	
- Light only	4.4" W x 1.5" H x 0.9" D
- With Bezel	4.6" W x 1.7" H x 1.0" D
Mounting	Surface or Grommet
Connector	4 Leads Blunt Cut, 7"
LEDs	4
Legal Heading	W-1 RCL, WCL, YCL
SAE	J595 Class 1 CA13 (Single Color)

- 22 Selectable Flash Patterns
- Class 1 & Title 13 Compliant
- Synchronized/Alternating Flash
- Polycarbonate Lens & Aluminum Housing
- Snap-On Black Bezel Included
- Optional Chrome Bezel
- Optional Stainless Steel Bracket
- Optional Black Vinyl Grommet
- 5 Year Warranty

1" X 3" ULTRA THIN CLASS 2 EMERGENCY WARNING LIGHTS SURFACE/TAPE MOUNT



PART NUMBER DESCRIPTION

M20388YCL AMBER CLEAR LENS

Voltage	12/24VDC	• Quad/Steady On Only
Amp Draw	400mA 12V / 240mA 24V	• Steady On Mode Allows Flasher Module Control (M50910)
Dimensions	3.3" L x 1.2" H x 0.5" D	• 12/24VDC Dual Voltage
Mounting	3M Adhesive Tape	• Polycarbonate Lens & Housing
Connector	3 Leads Blunt Cut, 7"	• Sync/Pattern Change
LEDs	6	• Integrated Wire Lead
Legal Heading	W-2	• 5 Year Warranty
SAE	J595 Class 2	

6" OVAL THIN PROFILE SURFACE MOUNT WARNING




Optional M50146 Bezel



Optional M50607 Grommet

PART NUMBER	DESCRIPTION
M63353Y	AMBER
M63353YCL	AMBER CLEAR
M63353WYCL	WHITE/AMBER CLEAR LENS
M63353R	RED
M63353YGCL-A	AMBER GREEN CLEAR
M50146	STAINLESS STEEL BEZEL
M50607	LOW PROFILE GROMMET

Voltage	12/24VDC	• R, Y, YCL, WCL- 8 Selectable Flash Patterns (1 Steady On)
Amp Draw	220mA Amber / White 180mA Red 500mA Amber-Green / White-Amber	• YGCL-A, WYCL have 11 Selectable Flash Patterns
Dimensions	6.5" W x 2.3" H x 0.6" D	• 12/24VDC Dual Voltage
Mounting	Two Hole Surface Mount, 5.5" C to C	• Polycarbonate Lens & Housing
Connector	4 Leads Blunt Cut, 7"	• Mounting Hole with Brass Collars for Riveted Installations
LEDs	14 (8 Amber/6 Green or White for YGCL-A, WYCL)	• Class 1 Patterns
Legal Heading	W-1	• Multi-Lamp Sync Alternate Function
SAE	J595 Class 1	• 5 Year Warranty

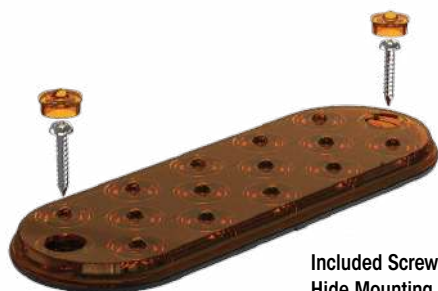

Included Screw Caps
Hide Mounting Screws
For a Clean Finish

NEW

6" OVAL THIN PROFILE SURFACE MOUNT WARNING



PART NUMBER	DESCRIPTION
M63201BCL	BLUE CLEAR LENS
M63201R	RED
M63201Y	AMBER
M63201Y-X	AMBER – BULK PACK
M63201YCL	AMBER CLEAR LENS
NEW M63201Y-A	AMBER WARNING & PARK/TURN
NEW M63201WCL-A	WHITE WARNING & BACK-UP

Voltage 12/24VDC
Amp Draw R,Y,Y-A: Max 0.9A 12V; BCL,WCL-A: Max 0.6A 12V
Dimensions 6.3"W x 2.2"H x 1.2"D
Mounting 6" Oval Grommet
Connector Integrated PL-3 + 1 Wires, 11"
- WCL-A, Y-A Integrated PL-3 + 2 Wires, 11"
LEDs 24
Legal Heading W-2 (Blue), W-1 (Amber, Red)
- WCL-A, Y-A R, W-2 (White), P I6 I7, W1 (Amber)
SAE
- BCL J595 Class 2
- R, -Y J595 Class 1
- WCL-A J593, J595 Class 2
- Y-A J222, J2261, J595 Class 1

M63201BCL, M63201R, M63201Y /YCL

- 12/24VDC Dual Voltage
- 7 Selectable Flash Patterns/ 1Steady
- Alternate/Sync Provisions
- SAE Class 1 Patterns Red/Amber
- SAE Class 2 Patterns White/Blue
- Fits Standard 6" Grommet (M50600-B Sold Separately)
- 5 Year Warranty

M63201WCL-A, M63201Y-A

Additional Features

- 28 Programmable Flash Patterns
- Optional DOT Compliant Back-Up (WCL-A), or Amber Park / Front Turn / Rear Turn (Y-A)
- 4 (WCL-A) or 5 (Y-A) Programmable Priority Modes Allows Back-Up / Turn Signal Override, or Warning Override
- Discrete Wiring – Dedicated Back-Up / Turn and Warning Circuits

NEW

4" ROUND EMERGENCY WARNING



Side View

NEW
NEW

PART NUMBER	DESCRIPTION
M42701BCL	BLUE CLEAR LENS
M42701R	RED
M42701Y	AMBER
NEW M42701Y-A	AMBER WARNING & PARK/TURN
NEW M42701YCL-A	AMBER CLEAR LENS WARNING & PARK/TURN

Voltage 12/24VDC
Amp Draw R,Y,Y-A,YCL-A: Max 0.9A 12V / BCL: Max 0.6A 12V
Dimensions 4.2" Diam. x 1.6"D
Mounting 4" Round Grommet
Connector Integrated PL-3 + 1 Leads, 11" (+ 2 Leads Y-A,YCL-A)
LEDs 24
Legal Heading W-2 (Blue), W-1 (Red, Amber)
- Y-A /YCL-A 6 I7 P, W1
SAE J595 Class 1 (Red, Amber), J595 Class 2 (Blue)
- Y-A /YCL-A J222, J2261, J595 CLASS 1

M42701BCL, M42701R, M42701Y

- 12/24VDC Dual Voltage
- 7 Selectable Flash Patterns/ 1Steady
- Alternate/Sync Provisions
- SAE Class 1 Patterns Red/Amber
- SAE Class 2 Patterns White/Blue
- Fits Standard 4" Grommet (M50400-B Sold Separately)
- 5 Year Warranty

M42701Y-A, M42701YCL-A Additional Features

- 28 Programmable Flash Patterns
- Optional DOT Compliant Amber Park / Front Turn / Rear Turn
- 5 Programmable Priority Modes Allows Turn Signal Override or Warning Light Override
- Discrete Wiring – Dedicated Park/Turn Circuit and Warning Circuits



1-1/4" CLEARANCE MARKER & FLASHING WARNING, 2 LIGHTS IN 1



AVAILABLE IN RED/AMBER



AMBER



RED



AMBER



RED



AMBER/WHITE



RED/WHITE



SHOWN WITH OPTIONAL
M50118 Stainless Steel Bezel



1-1/4" Light Head
Fits 3/4" Hole

PART NUMBER	DESCRIPTION
M09450RYCL-DC	1-1/4" ROUND CM RED/AMBER AND FLASHING WARNING
M09450RCL-DC	1-1/4" ROUND CM RED AND FLASHING WARNING
M09450RWCL-DC	1-1/4" ROUND CM RED-WHITE AND FLASHING WARNING
M09450YCL-DC	1-1/4" ROUND CM AMBER AND FLASHING WARNING
M09450YWCL-DC	1-1/4" ROUND CM AMBER CLEAR LENS AND FLASHING WARNING
M50118	OPTIONAL 1-1/4" STAINLESS STEEL GROMMET COVER

LEDs	4 (YCL-DC: 4 Amber) (YWCL-DC: 2 Amber, 2 White) (RCL-DC: 4 Red) (RWCL-DC: 2 Red, 2 White) (RYCL-DC: 2 Red, 2 Amber)	• DOT FMVSS 108 Compliant - Red/Amber P2 P3 (in Red) - Red and Red / White P2 - Amber and Amber/White P2 P3 PC2 • AND Flashing Warning Device • SAE J595 Class 2 and Class 3 • Available in 5 models (Red, Red / Amber, Red/White, Amber, Amber / White) • Built-in Flasher - 28 Patterns • Polycarbonate Lens and Housing • 5 Year Warranty
Voltage	12.8VDC	
Amp Draw	140mA Max Amp	
Dimensions		
- Light Only	1.25" Diam. x 0.6" H (1.2" OAL)	
- Grommet	1.75" Diam. (Grommet)	
Mounting	Grommet fits 3/4" Hole	
Connector	4 Jacketed Leads 180 Bullets, 7"	
Legal Heading		
- Red / Amber	P2 P3, W-2	
- Amber Models	P2 P3 PC2, W-2	
- Red Models	P2, W-2	
SAE	J592, J595 Class 2	

1" ROUND MICRO EMERGENCY WARNING



PART NUMBER	DESCRIPTION
M09370Y	AMBER
M09370YCL	AMBER CLEAR LENS
M09370WCL	WHITE CLEAR LENS

Voltage	12.8VDC	• 11 Selectable Flash Patterns
Amp Draw	210mA	• Polycarbonate Lens & Housing
Dimensions	1.0" Diameter	• Synchronized/Alternating Flash
Mounting	Grommet	• Stainless Steel Bezel Included
Connector	4 Leads Blunt Cut, 27"	• Black Vinyl Grommet Included
LED	1	• Includes In line Flasher Module • 5 Year Warranty

3.50" ROUND BATTERY OPERATED EMERGENCY FLASHERS




PART NUMBER	DESCRIPTION
SDL-35R	RED
SDL-35Y	AMBER

Dimensions	3.5" Diam. x 1.5" H
LED	1

- Stationary Vehicle Magnet Mount
- Operates 75 Hours on 3 AAA
- Batteries Not Included
- Visible 1/2 Mile
- Dual Function Steady & Flash
- 1 Year Warranty

BATTERY OPERATED EMERGENCY FLASHERS



PART NUMBER	DESCRIPTION
SDL-50-A	AMBER
SDL-52-A	RED

Dimensions	6.3" W x 4.0" H x 1.4" D
LEDs	18

- Stationary Vehicle Magnet Mount
- Built In Vertical & Horizontal Stand
- Operates 140 Hours on 4 AA
- Batteries Not Included
- Visible 1-1/4 Miles
- 3 Functions Steady, Flash, Split Flash
- 1 Year Warranty

PROGRAMMABLE EMERGENCY FLASHER



PART NUMBER	DESCRIPTION
M50910	LED FLASHER CONTROL MODULE

Voltage	12.8VDC
Dimensions	2.6" W x 1.8" H x 0.6" D
Mounting	(2) 3/16" Holes 3-7/16" W
Connector	7 Leads Blunt Cut, 11"

- 16 Selectable Flash Patterns
- 20 Amp Heavy Duty Flasher
- 2 Outputs, 10 Amps each
- Simultaneous or Alternate Wig-Wag Flash
- 1 Year Warranty

- STOP/TURN/TAIL
- BACK-UP
- LICENSE LIGHTS
- TURN SIGNALS



LED STOP/ TURN/TAI

ALL-IN-ONE STOP/TURN/TAIL & BACK-UP & FLASHING WARNING




Lightning



RED TAIL/STOP LIGHT
AND OPTIONAL
RED TURN




WHITE
BACK-UP



OPTIONAL
AMBER TURN



FLASHING
AMBER WARNING



OPTIONAL FLASHING
WHITE WARNING

NEW

5.5" ROUND HYBRID COMBINATION STOP/TURN/TAIL & BACK-UP & AMBER FLASHING WARNING LIGHT



M85427R-YCL

PART NUMBER	DESCRIPTION
M85427R-YCL	5.5" ROUND STT & BU & AMBER WARN FLANGE MOUNT

LEDs 30 (12 Red, 9 White, 9 Amber)

Voltage 12.8VDC

Amp Draw 0.6A Max Amp (Stop + Warn)
BU 0.2A, Tail 20mA, Stop 0.2A,
Amber Turn 100mA, Warn 0.4A

Dimensions 5.5" Diam. x 0.5" Depth

Mounting 3-Hole Flange Mount (3) 3/16" Holes
Hole Cutouts: 1-3/16" for cable exit

Connector 7 Leads Blunt Cut, 10"

Legal Heading R, I6 S2 T2, W-1

DOT/SAE J593, J2040, J2261, J595

- All-In-One S/T/T & Back-Up & Dual Color Amber White Flashing Warning
- SAE J595 Class 1 Warning Device
- 28 Selectable Flash Patterns
- Flash Amber Only, White Only, or Amber / White Dual Color
- Amber Turn for trucks with dedicated turn wire (4-wire S/T/T circuit)
- **Patented Hybrid Series with Lightning Optics**
- **US Patent 8,009,364 8,052,313 8,717,679 B2 11,815,232 B2**
- Mounting Screws & Screw Caps Included
- Neoprene Gasket Attached
- 5 Year Warranty




12 LEDs RED
TAIL LIGHT




12 LEDs RED
STOP LIGHT



9 LEDs WHITE
BACK-UP LIGHT



9 LEDs AMBER
WARNING & TURN

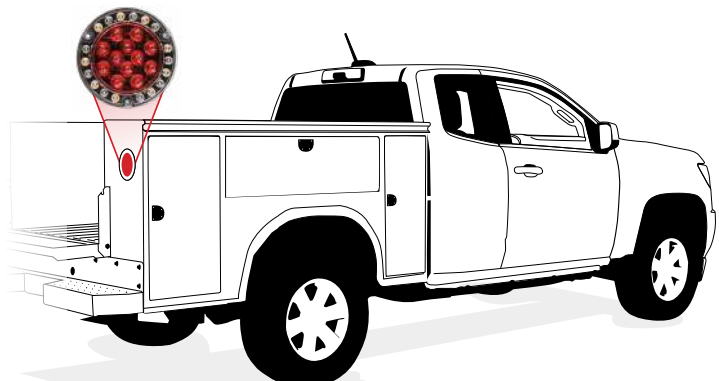

ROUND HYBRID COMBINATION LIGHTS

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

NEW



ROUND HYBRID SERIES — 4" STOP/TURN/TAIL & BACK-UP & WORK LIGHT



M85437R-WL with Work Light
4" Round Red S/T/T &
5-1/2" Back-Up Flange



310 Lumen Back-Up /
1,000 Lumen Work Light

PART NUMBER	DESCRIPTION
M85437R-WL	5.5" ROUND HYBRID STT & BACK UP & WORK LIGHT
LEDs	21 (12 Red, 9 White)
Voltage	12.8VDC
Amp Draw	BU 0.2A, Tail 20mA, Stop 0.2A, WL 1.0A
Dimensions	5.5" Diam x 0.5" Depth
Mounting	3-Hole Flange Mount (3) 3/16" holes Hole cutouts: 1-3/16" for cable exit
Connector	5 Leads Blunt Cut, 10"
Legal Heading	R, I6 S2 T2
DOT/SAE	J593, J2040, J2261
Lumens	1,000 (Work Light), 310 (Backup)

- 5.5" Round Flange Mount Stop/Turn/Tail & Back-Up Light
- M85437R-WL Has Dedicated Wire for 1,000 Lumens Work Light
- Patented Hybrid Series with Lightning Optics
- US Patent No 8,009,364 8,052,313 8,717,679 B2 11,815,232 B2
- Neoprene Gasket Attached
- Mounting Screws and Screw Caps Included
- Polycarbonate Lens & Housing
- 5 Year Warranty

ROUND HYBRID SERIES — 4" STOP/TURN/TAIL & BACK-UP



M85417R-KIT
Includes (2) M50900 PL3 Connectors

PART NUMBER	DESCRIPTION
M85417R	5.5" ROUND HYBRID STT & BACK UP LIGHT
M85417R-X	5.5" ROUND HYBRID STT & BACK UP LIGHT – BULK PACK
M85417R-KIT	5.5" ROUND HYBRID STT & BACK UP LIGHT + (2) M50900 PL3 PIGTAIL
LEDs	21 (12 Red, 9 White)
Voltage	12.8VDC
Amp Draw	BU 0.2A, Tail 20mA, Stop 0.2A
Dimensions	5.5" Diam x 0.5" Depth
Mounting	3-Hole Flange Mount (3) 3/16" holes Hole cutouts: 1-3/16" for cable exit
Connector	(2) PL-3 Female, 10" Wire <i>*M85417R-KIT includes (2) M50900</i>
Legal Heading	R, I6 S2 T2
DOT/SAE	J593, J2040, J2261

- 5.5" Round Flange Mount Stop/Turn/Tail & Back-Up Light
- Patented Hybrid Series with Lightning Optics
- US Patent No 8,009,364 8,052,313 8,717,679 B2
- Neoprene Gasket Attached
- Mounting Screws and Screw Caps Included
- Polycarbonate Lens & Housing
- 5 Year Warranty

6" OVAL & 1" X 17" HYBRID COMBINATION LIGHTS

6" OVAL HYBRID THIN-PROFILE COMBINATION STT/BACK-UP



Optional M50146 Bezel



Optional M50607 Grommet

PART NUMBER	DESCRIPTION
M63354-HYB	COMBINATION STT & BACK-UP
M63350-TAPE	OPTIONAL MOUNTING TAPE
M50607	LOW PROFILE GROMMET
M50146	STAINLESS STEEL BEZEL

LEDs	12 (8 Red / 4 White)	• Ultra Thin 0.5" Low Profile Design
Voltage	12.8VDC	• Polycarbonate Lens & Housing
Amp Draw	BU 150mA / ST180mA	• Completely Sealed Electronics
Dimensions	6.5" W x 2.3" H x 0.5" D	• Patented Lightning Optics
Mounting	2 Hole Surface, 5-1/2" C to C, Grommet, or Tape	• US Patent No. 8,009,364
Connector	(2) Female PL3, 6"	• US Patent No. 8,717,679 B2
Legal Heading	R, I6 S2 T2	• 5 Year Warranty
DOT/SAE	J593, J2040, J2261	



Optional M50607 Grommet



Optional M63350-TAPE

NEW

1" X 17" HYBRID COMBINATION STT & BACK-UP



M85801R



M85801RCL



Screws & Caps Included

PART NUMBER	DESCRIPTION
M85801R	STT & BACK-UP
M85801RCL	STT & BACK-UP – CLEAR LENS

LEDs	27 (11 Red, 16 White)	• Hybrid Combo STT & Back-Up
Voltage	12.8VDC	• Thin Design – Only 1.2" Wide
Amp Draw	0.4A Max	• Horizontal or Vertical Mount
Dimensions	17" L x 1.2" W x 0.5" D	• Available with Red Lens (R) or Clear Lens (RCL)
Mounting	2 Hole Surface, 16-1/8" C to C	• Mounting Screws and Screw Caps Included
Connector	4 Leads, Blunt Cut, 12"	• Polycarbonate Lens & Housing
Legal Heading	R, I6 S2 T2	• 5 Year Warranty
DOT/SAE	J593, J2040, J2261	

STT/BU KIT & OTHER HYBRID COMBINATION LIGHTS

NEW



4" ROUND STT AND LED B/U KIT



Retail Gift Box

PART NUMBER	DESCRIPTION		
M42346RBU-KIT	4" RED STT + 4" WHITE BACK-UP KIT		
	M42346R	M42349	
LEDs	6	8	• 4" STT + BU KIT
Voltage	12.8VDC	12.8VDC	• Contains (1) M42346R
Amp Draw	200mA	170mA	and (1) M42349
Dimensions	4.3" Diam. x 1.8" Depth	4.3" Diam. x 1.7" Depth	• Retail Packaging
Mounting	Grommet	Grommet	• 5 Year Warranty
Connector	PL-3	PL-3	
Legal Heading	I6 S2 T2	R	
DOT/SAE	J2040, J2261	J593	



M42346R



M42349

KIT INCLUDES



Integrated PL-3 Connectors



NEW



OTHER HYBRID COMBINATION LIGHTS




M63201WCL-A
Combination Back-Up
+ White Flashing Warning



M63201Y-A
Combination Park/Turn
+ Amber Flashing Warning



M42701YCL-A
Combination Park/Turn
+ Amber Flashing Warning



M42701Y-A
Combination Park/Turn
+ Amber Flashing Warning

PART NUMBER	DESCRIPTION		
M63201WCL-A	6" OVAL COMBINATION BACK-UP + FLASHING WARNING		
M63201Y-A	6" OVAL COMBINATION PARK/TURN + FLASHING WARNING		
M42701Y-A	4" ROUND COMBINATION PARK/TURN + FLASHING WARNING		
M42701YCL-A	4" ROUND COMBINATION PARK/TURN + FLASHING WARNING		
Voltage	12/24VDC		• WCL-A: Combination White Flashing Warning and DOT Compliant Back-Up Lamp
Amp Draw	WCL-A: Max 0.6A 12V Y-A: Max 0.9A 12V		• Y-A /YCL-A: Combo Amber Flashing Warning and DOT Park/Front Turn/Rear Turn
Dimensions	6" Oval: 6.3" W x 2.2" H x 1.2" D 4" Round: 4.2" Diam. x 1.6" D		• 28 Programmable Flash Patterns
Mounting	6" Oval Grommet		• I7 Compliant for Mounting Close to Headlights
Connector	Integrated PL-3 & 2 Wires, 11"		• 4 (WCL-A) or 5 (Y-A) Programmable Priority Modes Allows Back-Up / Turn Signal Override, or Warning Override
LEDs	24		• Discrete Wiring – Dedicated Back-Up / Turn Signal Circuit and Warning Circuits
Legal Heading	R, W2 (WCL-A) P I6 I7, W1 (Y-A)		• 5 Year Warranty
SAE	J593, J595 (WCL-A) J222, J2261, J595 (Y-A)		



PL-3 Connector and Separate
Wires for Warning Light

4" ROUND STT WITH MaxxHeat HEATED LENS TECHNOLOGY



MaxxHeat



M42358RDF-MH
BACK

PART NUMBER	DESCRIPTION
M42358R-MH	4" RED STT WITH PL-3 MaxxHeat
M42358RDF-MH	4" RED STT WITH DryFit MaxxHeat

LEDs	6
Voltage	12.8VDC
Amp Draw	
- Heater Off:	Stop/Turn: 0.4A Tail: 0.1A
- Heater On:	Stop/Turn: 2.3A Tail: 2.0A
Dimensions	4.3" Diam. x 1.8" D
Mounting	Grommet
Connector	PL-3 or DryFit
Legal Heading	I6 S2 T2
DOT/SAE	J2040, J2261

- No Additional Wiring Required
- Multi-Stage Heater (High/Med/Low/Off)
- Smart Electronics Reduce Amp Draw To Just 0.7Amp With Heater On
- Polycarbonate Lens & Housing
- Completely Sealed Electronics
- 5 Year Warranty

6" OVAL STT WITH MaxxHeat HEATED LENS TECHNOLOGY



MaxxHeat



M63348RDF-MH

PART NUMBER	DESCRIPTION
M63348R-MH	6" OVAL STT WITH PL-3 MaxxHeat
M63348RDF-MH	6" OVAL STT WITH DryFit MaxxHeat

LEDs	6
Voltage	12.8VDC
Amp Draw	
- Heater Off:	Stop/Turn: 0.4A Tail: 0.1A
- Heater On:	Stop/Turn: 2.3A Tail: 2.0A
Dimensions	6.4" W x 2.2" H x 1.7" D
Mounting	6" Grommet
Connector	PL-3 or DryFit, 7"
Legal Heading	I6 S2 T2
DOT/SAE	J2040, J2261

- No Additional Wiring Required
- Multi-Stage Heater (High/Med/Low/Off)
- Smart Electronics Reduce Amp Draw To Just 0.7Amp With Heater On
- Polycarbonate Lens & Housing
- Completely Sealed Electronics
- 5 Year Warranty

4" ROUND STT 6 LED



M42344R BACK

PART NUMBER	DESCRIPTION
M42346R	4" RED STT WITH PL-3 CONNECTOR
M42346R-X	4" RED STT WITH PL-3 CONNECTOR – BULK PACK
M42344R	4" RED STT WITH DryFit CONNECTOR
M42344R-X	4" RED STT WITH DryFit CONNECTOR – BULK PACK
LEDs	6
Voltage	12.8VDC
Amp Draw	200mA / 15mA
Dimensions	4.3" Diam. x 1.8" Depth
Mounting	Grommet
Connector	PL-3 or DryFit
Legal Heading	I6 S2 T2
DOT/SAE	J2040, J2261

- 4" Round STT
- Patented Lightning Optics
- US Patent No. 8,009,365
- US Patent No. 8,717,679 B2
- Superior Lens Optics
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- 5 Year Warranty

4" ROUND STT 9 LED



M42322RCL
RED CLEAR LENS



M42321R
SURFACE MOUNT



M42322RDF
BACK

PART NUMBER	DESCRIPTION
M42322R	4" RED STT – GROMMET MOUNT
M42322R-X	4" RED STT – GROMMET MOUNT – BULK PACK
M42322RCL	4" RED/CLEAR LENS STT – GROMMET MOUNT
M42322RDF	4" RED STT, DryFit
M42322RDF-X	4" RED STT, DryFit – BULK PACK
M42322RCLDF	4" RED/CLEAR LENS STT, DryFit
M42322R-DVDF	4" RED STT 12/24VDC DUAL VOLTAGE, DryFit
M42321R	4" RED STT, BLUNT CUT – SURFACE MOUNT
LEDs	9
Voltage	12.8VDC
Amp Draw	170mA / 15mA
Dimensions	4.3" Diam. x 1.8" D
- M42321R	5.5" Diam. x 0.75" D
Mounting	Grommet
- M42321R	Surface, 3 Hole, 5" Bolt
Connector	PL-3 or DryFit
- M42321R	3 Wires, Blunt Cut, 12"
Legal Heading	I6 S2 T2
DOT/SAE	J2040, J2261

- 4" Round STT
- Patented Lightning Optics
- US Patent No. 8,009,364
- US Patent No. 8,717,679 B2
- Superior Lens Optics
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- 5 Year Warranty

NEW

4" ROUND STT 12 LED – FLANGE MOUNT



PART NUMBER	DESCRIPTION
M42323R-A	4" RED STT – FLANGE MOUNT
LEDs	12
Voltage	12.8VDC
Amp Draw	190mA / 10mA
Dimensions	5.5" Diam. x 1.7" D
Mounting	3 Hole Flange, 5" Bolt Circle, 4.5" Hole Cutout
Connector	PL-3
Legal Heading	I6 S2 T2
DOT/SAE	J2040, J2261

- 4" Round STT
- Industry Standard Integrated Flange Mount
- PL-3 Connector
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- 5 Year Warranty

4" ROUND LED STOP/TURN/TAIL LIGHTS

4" ROUND FLANGE MOUNT STT 7 LED WITH REFLECTOR — BULK PACK



PART NUMBER	DESCRIPTION	
M42354R-X	4" RED STT WITH PL-3 CONNECTOR	
LEDs	7	• Outer Red Reflector
Voltage	12.8VDC	• Thin Low Profile Design
Amp Draw	160mA	• Patented Lightning Optics
Dimensions	5.6" Diam. x 0.7" Depth	• US Patent No. 8,009,364
Mounting	3 Hole Flange	• US Patent No. 8,717,679 B2
Connector	PL-3	• Acrylic Lens/Polycarbonate Housing
Legal Heading	A, I6 S2 T2	• Neoprene Gasket Included
DOT/SAE	J594, J2040, J2261	• 5 Year Warranty

4" ROUND STT 32 LED — VANTAGE SERIES



PART NUMBER	DESCRIPTION	
M42320R	4" RED STT WITH VANTAGE OPTICS	
LEDs	32	• 4" Round STT
Voltage	12.8VDC	• Superior Lens Optics
Amp Draw	250mA	• Sealed Moisture Proof Electronics
Dimensions	4.3" Diam. x 2.0" Depth	• Polycarbonate Lens & Housing
Mounting	Grommet	• 5 Year Warranty
Connector	PL-3	
Legal Heading	I6 S2 T2	
DOT/SAE	J2040, J2261	

4" ROUND STT 44 LED



PART NUMBER	DESCRIPTION	
M42100R	4" RED STT – GROMMET MOUNT	
LEDs	44	• 4" Round STT
Voltage	12.8VDC	• WSI – Wide Spectrum Illumination
Amp Draw	170mA	• Sealed Moisture Proof Electronics
Dimensions	4.3" Diam. x 2.0" Depth	• Polycarbonate Lens & Housing
Mounting	Grommet	• 10 Year Warranty
Connector	PL-3	
Legal Heading	I6 S2 T2	
DOT/SAE	J2040, J2261	

IMPROVED

4" ROUND STT 56 LED



PART NUMBER	DESCRIPTION	
M56100R-A	4" RED STT	
LEDs	56	• Our Classic 56 LEDs Now With A New Lens Design
Voltage	12.8VDC	• Sealed Moisture Proof Electronics
Amp Draw	300mA 20mA	• Polycarbonate Lens & Housing
Dimensions	4.3" Diam. x 2.0" Depth	• 10 Year Warranty
Mounting	Grommet	
Connector	PL-3	
Legal Heading	I6 S2 T2	
DOT/SAE	J2040, J2261	

6" OVAL LED STOP/TURN/TAIL LIGHTS

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

6" OVAL SURFACE, GROMMET, OR TAPE MOUNT — 14 LED



OPTIONAL
M50146 BEZEL



OPTIONAL
M50607 GROMMET

PART NUMBER	DESCRIPTION
M63350R	OVAL RED STT WITH BLUNT CUT WIRES
M63351R-X	OVAL RED STT WITH .180 BULLETS – BULK PACK
M63352R-X	OVAL RED STT WITH PL-3 CONNECTOR – BULK PACK
M63350-TAPE	OPTIONAL MOUNTING TAPE
M50607	LOW PROFILE GROMMET
M50146	STAINLESS STEEL BEZEL

LEDs	14	• 6" Oval STT or Center High Mount Stop Light (CHMSL)
Voltage	12.8VDC	• Also Available in Bulk Pack (-X)
Amp Draw	230mA (Stop) 15mA (Tail)	• Polycarbonate Lens & Housing
Dimensions	6.5" W x 2.3" H x 0.5" D	• Reinforced Riveted Mounting Hole
Mounting	2 Hole Surface, 5.5" C to C, or <i>Optional</i> M50607 Grommet	• Screw Hole Covers Included
Connector		• 5 Year Warranty
- M63350R	3 Wires, Blunt Cut, 6"	
- M63351R	3 Wires, .180 Bullets, 6"	
- M63352R	3 Wires PL-3, 6"	
Legal Heading	I6 S2 T2 U3	
DOT/SAE	J2040, J2261, J1957	



OPTIONAL M63350-TAPE

6" OVAL SURFACE, GROMMET, OR TAPE MOUNT — 6 LED



Lightning



PART NUMBER	DESCRIPTION
M63354R	OVAL RED STT

LEDs	6	• Polycarbonate Lens & Housing
Voltage	12.8VDC	• Lightning Patented Lens
Amp Draw	100mA	• US Patent No. 8,009,364
Dimensions	6.5" W x 2.3" H x 0.5" D	• US Patent No. 8,717,679 B2
Mounting	2 Hole, Grommet, or Tape	• Optional M50607 Low Profile Grommet
Connector	PL-3 Hardwired, 6"	• Optional M50146 Bezel
Legal Heading	I6 S2 T2	• 5 Year Warranty
DOT/SAE	J2040, J2261	

NEW

6" OVAL SURFACE AND FLANGE MOUNT — 10 LED



M63320R-A



M63320RCL-A



M63320RCH-A



M63323R-A

PART NUMBER	DESCRIPTION
M63320R-A	OVAL RED STT SURFACE MOUNT BLACK
M63320RCL-A	OVAL RED CLEAR LENS STT SURFACE MOUNT BLACK
M63320R-ACH	OVAL RED STT SURFACE MOUNT CHROME
M63323R-A	OVAL RED STT FLANGE MOUNT BLACK

LEDs	10	• New A-Series Design, Sleek Look
Voltage	12.8VDC	• Available in Black or Chrome Bezel
Amp Draw	100mA 10mA	• Available in Surface or Flange Mount
Dimensions	7.8" W x 3.5" H x 0.7" D	• Horizontal or Vertical Mount
Mounting	2 Hole Surface, 7-1/4" C to C 2 Hole Flange, 7-1/4" C to C	• Polycarbonate Lens & Housing
Connector	3 Wires, Blunt Cut, 13"	• 5 Year Warranty
Legal Heading	I6 S2 T2	
DOT/SAE	J2040, J2261	

6" OVAL LED STOP/TURN/TAIL LIGHTS

NEW

6" OVAL STT 6 LED



Lightning



NEW

NEW



PART NUMBER	DESCRIPTION
M63346R	OVAL RED STT GROMMET MOUNT
M63346R-X	OVAL RED STT GROMMET MOUNT, 6 LED – BULK PACK
M63346RDF	OVAL RED STOP/TURN/TAIL, 6 LED, DryFit
M63346RDF-X	OVAL RED STOP/TURN/TAIL, 6 LED, DryFit – BULK PACK
LEDs	6
Voltage	12.8VDC
Amp Draw	130mA
Dimensions	6.4" W x 2.2" H x 1.7" D
Mounting	Grommet
Connector	PL-3, or DryFit
Legal Heading	I6 S2 T2
DOT/SAE	J2040, J2261

- 6" Oval STT
- Also Available in Bulk Pack (-X)
- Patented Lightning Optics
- US Patent No. 8,009,364
- US Patent No. 8,717,679 B2
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- 5 Year Warranty

6" OVAL STT 9 LED



Lightning



M63322RCL
RED CLEAR LENS



M63322RDF

PART NUMBER	DESCRIPTION
M63322R	OVAL RED STT – GROMMET MOUNT
M63322R-X	OVAL RED STT – GROMMET MOUNT – BULK PACK
M63322RCL	OVAL RED/CLEAR LENS STT – GROMMET MOUNT
M63322RDF	OVAL RED STT – GROMMET MOUNT – DryFit CONNECTOR
M63322RDF-X	OVAL RED STT – GROMMET MOUNT – DryFit BULK PACK
LEDs	9
Voltage	12.8VDC
Amp Draw	190mA
Dimensions	6.4" W x 2.2" H x 1.7" D
Mounting	Grommet
Connector	PL-3 or DryFit
Legal Heading	I6 S2 T2
DOT/SAE	J2040, J2261

- 6" Oval STT
- Also Available in Bulk Pack (-X)
- Patented Lightning Optics
- US Patent No. 8,009,364
- US Patent No. 8,717,679 B2
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- 5 Year Warranty

6" OVAL STT 60 LED



M63100RDF
DryFit CONNECTOR

PART NUMBER	DESCRIPTION
M63100R	OVAL RED STT – PL-3
M63100RDF	OVAL RED STT – DryFit
LEDs	60
Voltage	12.8VDC
Amp Draw	300mA
Dimensions	6.4" W x 2.2" H x 1.7" D
Mounting	Grommet
Connector	
- M63100R	PL-3
- M63100RDF	DryFit
Legal Heading	I6 S2 T2
DOT/SAE	J2040, J2261

- 6" Oval STT
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- 10 Year Warranty

NEW

3" X 5" RECTANGULAR STT



M42213R-A



M42213RCL-A

PART NUMBER	DESCRIPTION
M42213R-A	RECTANGULAR RED STT
M42213RCL-A	RECTANGULAR RED/CLEAR LENS STT
LEDs	10
Voltage	12.8VDC
Amp Draw	250mA / 20mA
Dimensions	5.3" L x 3.4" W x 1.3" D
Mounting	Rectangle Grommet
Connector	PL-3
Legal Heading	I6 S2 T2
DOT/SAE	J592, J2040, J2261

- Horizontal or Vertical Mount
- Available in Red or Clear Lens
- Integrated PL-3 Connector
- Acrylic Lens
- Polycarbonate Housing
- 5 Year Warranty

2" X 4" RECTANGULAR SURFACE OR TAPE MOUNT STT



M42206RDF-X

OPTIONAL
M42206-ADHESIVE

PART NUMBER	DESCRIPTION
M42206R	RED STT SURFACE MOUNT
M42206RDF-X	RED STT SURFACE MOUNT, DryFit CONNECTOR
M42206-ADHESIVE	OPTIONAL MOUNTING TAPE
LEDs	14
Voltage	12.8VDC
Amp Draw	230mA
Dimensions	4.6" L x 2.5" W x 0.4" D
Mounting	2 Hole Surface, 3-7/8" C to C, or Optional Adhesive Tape
Connector	Three 7" Leads DryFit (M42206RDF-X)
Legal Heading	I S T
DOT/SAE	J585, J586, J588

- Ultra Thin 0.4" Design
- Also Available in Bulk Pack (-X)
- Polycarbonate Lens & Housing
- Completely Sealed
- Two Hole or Tape Mount
- Includes Caps to Cover Screws
- 5 Year Warranty

1" X 15" RECTANGULAR STT



PART NUMBER	DESCRIPTION	LEDs	10	
M63318R-A	RED	Voltage	12.8VDC	• 15" Surface Mount STT
M63318RCL-A	RED CLEAR LENS	Amp Draw	250mA	• Horizontal & Vertical 2 Hole Surface Mount
M63318R-A-GSKT	RED WITH GASKET	Dimensions	15.4" L x 1.2" W x 0.7" D	• Compact Thin Low Profile Design
		Mounting	Two Hole Surface	• 3 Blunt Cut 14" Leads
		Connector	3 Leads, Blunt Cut, 14"	• Sealed Moisture Proof Electronics
		Legal Heading	I6 S2 T2	• Polycarbonate Lens & Housing
		DOT/SAE	J2040, J2261	• 10 Year Warranty

1" X 15" RECTANGULAR STT OR CHMSL



PART NUMBER	DESCRIPTION
M63319R	RED STT, OR CHMSL CENTER HIGH MOUNT STOP LIGHT
LEDs	9
Voltage	12.8VDC
Amp Draw	150mA / 20mA
Dimensions	15.4" L x 1.2" W x 0.7" D
Mounting	Two Hole Surface Mount
Connector	3 Leads, Blunt Cut, 14"
Legal Heading	P2 P3 U3
DOT/SAE	J592, J2042, J1957

- Dual Function Operation
- Polycarbonate Lens & Housing
- Sleek Low Profile Design
- Two Hole Surface Mount-Horizontal Only
- 5 Year Warranty

THREE STUD BOX LIGHTS

THIN LOW PROFILE RECTANGULAR THREE STUD STT/BU BOX LIGHT



PART NUMBER	DESCRIPTION
M42221	STT/BACK-UP
LEDs	9 Red 10 White
Voltage	12.8VDC
Amp Draw	Back-Up 200mA STT 140mA
Dimensions	6.5" H x 5.3" W x 1.4" D
Mounting	3-Stud
Connector	3 Leads Blunt Cut, & Ground Stud
Legal Heading	A R I S T
DOT/SAE	J585, J586, J588, J593, J594

RECTANGULAR THREE STUD STT/BU BOX LIGHT



PART NUMBER	DESCRIPTION
M42220	STT/BACK-UP
LEDs	16 Red, 22 White
Voltage	12.8VDC
Amp Draw	Back-Up 260mA, Stop 150mA
Dimensions	5.8" W x 6.8" H x 3.3" D
Mounting	3-Stud
Connector	3 Leads Blunt Cut, & Ground Stud
Legal Heading	A R I 6 S 2 T 2
DOT/SAE	J593, J594, J2040, J2261

RECTANGULAR THREE STUD OEM BOX LIGHT WITH METRIPACK CONNECTOR & LED LICENSE LIGHT



PART NUMBER	DESCRIPTION
M42222	LED STT/BACK-UP
M42223L	LED LICENSE/STT/BU
M50930	REPLACEMENT PIGTAIL
LEDs	3-Stud OEM-Style Box Light
- M42222	38 (STT: 16, BU: 22)
- M42223L	42 (STT: 16, BU: 22, License: 4)
Voltage	12.8VDC
Amp Draw	290 mA (B/U)
	150 mA (Stop), 60 mA (License)
Dimensions	5.8" W x 6.8" H x 3.1" D (w/o studs)
Mounting	3-Stud
Connector	5 pin MetriPack 280, RH side
Legal Heading	A I 6 R S 2 T 2 (and L - M42223L)
DOT/SAE	J593, J594, J2040, J2261 (J587 - M42223L)

LED TRAILER LIGHT KIT M42226-KIT



PART NUMBER	DESCRIPTION
M42226-KIT	KIT WITH M42224, M42225L WITH LICENSE PLATE BRACKET AND WIRE HARNESS

LEDs	12 (8 Red, 4 White)
Voltage	12.8VDC
Amp Draw	Stop: 290mA, Tail: 80mA, License: 80mA,
Dimensions	5-1/4" W x 4-11/16" H x 1-7/8" D
Mounting	(2) 1/4" Studs, 2" Center to Center License Plate Mount 2 Hole 7.1" Center to Center
Connector	
- M42226-KIT	24 foot harness and 4 foot harness blunt cut to 4-pin flat trailer connector
- LH / RH Lamp	3 Wire Blunt Cut, 9"
Legal Heading	A 16 S2 T2 / PC2 A (side) / L (M42225L)
DOT/SAE	J587, J594, J2040, J2042, J2261

M42226-KIT is a complete kit containing (1) RH Lamp, (1) LH Lamp with License Light, License Plate Bracket, and Wire Harness.

FEATURES

- LED Stop/Turn/Tail, LED Side Marker, LED License Light
- Reflex Reflector Rear and Side
- 2-Stud Mount, 2" Center to Center
- 3 Wires Blunt Cut, 9" Length
- Sealed Components – Submersible
- Ideal for Boat Trailers
- 5 Year Warranty

ADHESIVE TAPE MOUNT AUX. STOP/TURN/TAIL & BACK-UP



STOP LIGHT & BACK-UP LIGHT



SHOWN WITH STOP AND BACK-UP FUNCTIONS ILLUMINATED

PART NUMBER	DESCRIPTION
MLS-STTB60-X	60" LED ADHESIVE STRIP – BULK PACK

LEDs	75
Voltage	12.8VDC
Amp Draw	BU 170mA, Stop 730mA, Tail 170mA
Dimensions	60" L x 0.5" W x 0.2" D
Mounting	3M Adhesive Tape
Connector	Flat 4-Pin Trailer Connector + 1 BU Wire 60" STT Harness 92" BU Wire

FEATURES

- Auxiliary STT/BU Flexible Strip lighting
- Rugged PVC Outer Jacket
- Includes 4-Pin Flat Trailer Connector
- Easy to Install 3M Adhesive Tape Mount
- 2 Year Warranty

2-1/2" CLEARANCE / AUXILIARY TURN



PART NUMBER	DESCRIPTION	
M11300YAT	AMBER AUX TURN	
LEDs	3	• Aux Turn
Voltage	12.8VDC	• Sealed Moisture Proof Electronics
Amp Draw	40mA	• Solid State Circuit Board
Dimensions	2.5" Diam. x 0.8" Depth	• Polycarbonate Lens & Housing
Mounting	Grommet	• 5 Year Warranty
Connector	3 Leads Blunt Cut, 6"	
Legal Heading	P2 P3 PC2	
DOT/SAE	J592, J2042	

3/4" MINI CLEARANCE / AUXILIARY STOP & CLEARANCE / AUXILIARY TURN



PART NUMBER	DESCRIPTION	
M09300RAS	RED AUX STOP, .180 BULLETS AMBER	
M09300YAT	AUX TURN, .180 BULLETS	
M09300RAS-XBC	RED AUX STOP, BLUNT CUT – BULK PACK	
M09300YAT-XBC	AMBER AUX TURN, BLUNT CUT – BULK PACK	
LEDs	3	• 3/4" Mini Aux Stop/Turn
Voltage	12.8VDC	• Also Available in Bulk Pack (-X)
Amp Draw		• Polycarbonate Lens & Housing
- RAS	60mA/25mA	• Not For Stand Alone Use
- YAT	70mA/30mA	• Includes M50112 Stainless Steel Bezel
Dimensions	3/4"Diam.	• 5 Year Warranty
Mounting	3/4" Hole	
Connector		
- RAS / YAT	3 Leads .180 Bullets, 10"	
- RAS-XBC / YAT-XBC	3 Leads Blunt Cut, 10"	
Legal Heading	P2 P3 PC2	
DOT/SAE	J592, J2042	

1.25" LOW PROFILE GROMMET OR SURFACE MOUNT CLEARANCE / AUXILIARY STOP — BULK PACK



Lightning



Optional
M50118 Bezel

PART NUMBER	DESCRIPTION	
M09410RAS-X	RED STT/CM P2 BULK ONLY	
M50118	STAINLESS STEEL BEZEL	
LEDs	6	• Bulk Pack Only
Voltage	12.8VDC	• Ultra Thin Low Profile Design
Amp Draw	80mA Red	• Patented Lightning Lens Optics
Dimensions	1-1/4"Diam.	• US Patent No. 8,009,364
Mounting	Grommet 3/4" Hole or Tape	• US Patent No. 8,717,679 B2
Connector	3 Leads .180 Bullets, 7"	• Polycarbonate Lens & Housing
Legal Heading	P2 P3 PC2	• Low LED Amp Draw
DOT/SAE	J592, J2042	• 5 Year Warranty

4" ROUND BACK-UP — GROMMET MOUNT 18 LED



PART NUMBER DESCRIPTION

M42324-A	4" ROUND BACK-UP SERIES -A WITH PL-3
M42324-AX	4" ROUND BACK-UP SERIES -A WITH PL-3 – BULK PACK
M42324-ADF	4" ROUND BACK-UP SERIES -A DryFit
M42324-ADFX	4" ROUND BACK-UP SERIES -A DryFit – BULK PACK

LEDs	18	• DOT FMVSS108 Compliant for 1-Lamp and 2-Lamp Simultaneously
Voltage	12.8VDC	
Amp Draw	280mA (12.8V)	• Available in PL-3 Connector or DryFit Connector
Dimensions	4.3" Diam. x 1.6" D	• Patented Lightning Lens Optics
Mounting	Grommet Mount	• US Patent No. 8,009,364 and 8,717,679B2
Connector	PL-3	• Polycarbonate Lens & Housing
- ADF Model	DryFit	• Retail Pack or Bulk Pack Available
Legal Heading	R	• 5 Year Warranty
DOT/SAE	J593	

12/24VDC MODEL - SEE PAGE 82

NEW

4" ROUND BACK-UP — GROMMET 9 LED & SURFACE MOUNT 18 LED



NEW

PART NUMBER DESCRIPTION

M42347	GROMMET MOUNT PL-3
M42348	GROMMET MOUNT DryFit
M42321-A	SURFACE MOUNT, BLUNT CUT WIRES

LEDs	9 (18 - M42321-A)	• 4" Round Back-Up
Voltage	12.8VDC	• Also Available in Bulk Pack (-X)
Amp Draw	280mA	• Patented Lightning Lens Optics
Dimensions	4.3" Diam. x 1.6" D	• US Patent No. 8,009,364
	5.5" Diam. x 0.75" D (M42321-A)	• US Patent No. 8,717,679 B2
Mounting	Grommet	• Sealed Moisture Proof Electronics
	3 Hole Surface, 5" (M42321-A)	• Available in Grommet or Surface Mount
Connector	PL-3, DryFit, or 3 Wire Blunt Cut	• Polycarbonate Lens & Housing
Legal Heading	R	• 5 Year Warranty
DOT/SAE	J593	

4" ROUND FLANGE MOUNT BACK-UP 10 LED — BULK PACK



PART NUMBER DESCRIPTION

M42354-X	FLANGE MOUNT PL-3
M42356-X	FLANGE MOUNT DryFit

LEDs	10	• Thin Low Profile Design
Voltage	12.8VDC	• Lightning Patented Lens
Amp Draw	200mA	• US Patent No. 8,009,364
Dimensions	5.6" Diam. x 0.7" Depth	• US Patent No. 8,717,679 B2
Mounting	3 Hole Flange	• Acrylic Lens/Polycarbonate Housing
Connector	PL-3 or DryFit	• Neoprene Gasket Included
Legal Heading	R	• 5 Year Warranty
DOT/SAE	J593	

FOR BACK-UP USE ONLY - OTHER USE WILL VOID WARRANTY

LED BACK-UP LIGHTS

6" OVAL BACK-UP SURFACE, GROMMET, OR TAPE MOUNT 14 LED



Optional M50146 Bezel



Optional M50607 Grommet

PART NUMBER	DESCRIPTION
M63350	WHITE BACK-UP
LEDs	14
Voltage	12.8VDC
Amp Draw	245mA
Dimensions	6.5" W x 2.3" H x 0.5" D
Mounting	2 Hole Surface, Grommet, or Tape
Connector	2 Wire 6" Leads
Legal Heading	R
DOT/SAE	J593

- Also Available in Bulk Pack (-X)
- Polycarbonate Lens & Housing
- Completely Sealed Electronics
- Includes Caps to Cover Screws
- Reinforced Riveted Mounting Holes
- 5 Year Warranty



Optional M63350-TAPE

NEW

6" OVAL BACK-UP — SURFACE AND FLANGE MOUNT 10 LED



M63320-A

M63320-ACH

M63323-A

PART NUMBER	DESCRIPTION
M63320-A	SURFACE MOUNT — BLACK HOUSING
M63320-ACH	SURFACE MOUNT — CHROME HOUSING
M63323-A	FLANGE MOUNT — BLACK HOUSING
LEDs	10
Voltage	12.8VDC
Amp Draw	270mA
Dimensions	7.8" W x 3.5" H x 0.7" D
Mounting	2 Hole Surface, 7-1/4" C to C
- M63323-A	2 Hole Flange, 7-1/4" C to C
Connector	2 Wires: 1 Blunt, 1 Ring, 13"
Legal Heading	R
DOT/SAE	J593

- DOT FMVSS108 Compliant for 1-Lamp or 2-Lamp Systems
- Available in Black Housing or Chrome Housing
- Polycarbonate Lens & Housing
- 5 Year Warranty

6" OVAL BACK-UP — GROMMET MOUNT 18 LED



Lightning



M63347-ADF

PART NUMBER	DESCRIPTION
M63347-A	GROMMET MOUNT — PL-3
M63347-ADF	GROMMET MOUNT — DryFit CONNECTOR
LEDs	18
Voltage	12.8VDC
Amp Draw	0.5A
Dimensions	6.4" W x 2.0" H x 1.8" D
Mounting	Grommet
Connector	PL-3, or DryFit
Legal Heading	R
DOT/SAE	J593

- DOT FMVSS108 Compliant for 1-Lamp or 2-Lamp Systems
- Also Available in Bulk Pack (-X)
- Patented Lightning Lens Optics
- US Patent No. 8,009,364
- US Patent No. 8,717,679 B2
- Polycarbonate Lens & Housing
- 5 Year Warranty

6" OVAL BACK-UP — GROMMET MOUNT 18 LED



Lightning



M63324-ADF

PART NUMBER	DESCRIPTION
M63324-A	GROMMET MOUNT — PL-3
M63324-ADF	GROMMET MOUNT — DryFit CONNECTOR
LEDs	18
Voltage	12.8VDC
Amp Draw	0.5A
Dimensions	6.4" W x 2.0" H x 1.8" D
Mounting	Grommet
Connector	PL-3 or DryFit
Legal Heading	R
DOT/SAE	J593

- DOT FMVSS108 Compliant for 1-Lamp or 2-Lamp Systems
- Also Available in Bulk Pack (-X)
- Patented Lightning Lens Optics
- US Patent No. 8,009,364
- US Patent No. 8,717,679 B2
- Polycarbonate Lens & Housing
- 5 Year Warranty

NEW

5

3" X 5" RECTANGULAR BACK-UP



PART NUMBER	DESCRIPTION	
M42213-A	GROMMET MOUNT	
LEDs	10	• Horizontal or Vertical Mount
Voltage	12.8VDC	• Grommet Mount
Amp Draw	170mA	(M49700 Sold Separately)
Dimensions	5.3" W x 3.4" H x 1.3" D	• Integrated PL-3 Connector
Mounting	Rectangular Grommet	• Acrylic Lens & Polycarbonate Housing
Connector	PL-3	• 5 Year Warranty
Legal Heading	R	
DOT/SAE	J593	

3" X 5" RECTANGULAR BACK-UP AND REFLECTOR

5



PART NUMBER	DESCRIPTION	
M42214	GROMMET MOUNT BACK UP LIGHT AND REFLECTOR	
LEDs	20	• Horizontal or Vertical Mount
Voltage	12.8VDC	• Combination Back-Up and Reflex Reflector
Amp Draw	0.5A	• Grommet Mount (M49700)
Dimensions	5.3" W x 3.4" H x 1.8" D	• Acrylic Lens & ABS Housing
Mounting	Rectangular Grommet	• 5 Year Warranty
Connector	PL-3	
Legal Heading	A R	
DOT/SAE	J593, J594	

SURFACE OR TAPE MOUNT 0.4" ULTRA THIN RECTANGULAR BACK-UP

5

Optional
M42206-ADHESIVE

PART NUMBER	DESCRIPTION	
M42206	SURFACE MOUNT BACK-UP	
M42206-ADHESIVE	OPTIONAL MOUNTING TAPE	
LEDs	14	• Ultra Thin 0.4" Low Profile Design
Voltage	12.8VDC	• Also Available in Bulk Pack (-X)
Amp Draw	240mA	• Polycarbonate Lens & Housing
Dimensions	4.6" W x 2.5" H x 0.4" D	• Completely Sealed Electronics
Mounting	2 Hole Surface, 3-7/8" C to C or Tape Mount	• Includes Caps to Cover Screws
Connector	Tape 2 Wire 6" Leads	• 5 Year Warranty
Legal Heading	R	
DOT/SAE	J593	

RECTANGULAR SURFACE MOUNT BACK-UP

10



PART NUMBER	DESCRIPTION	
M63318-A	RECTANGULAR BACK-UP	
M63318-A-GSKT	RECTANGULAR BACK-UP WITH GASKET	
LEDs	20	• 15" Surface Mount Back-Up
Voltage	12.8VDC	• Horizontal or Vertical Mount
Amp Draw	500mA	• Compact Thin Low Profile Design
Dimensions	15.4" L x 1.2" W x 0.7" D	• Sealed Moisture Proof Electronics
Mounting	Surface	• Polycarbonate Lens & Housing
Connector	2 Leads, Blunt Cut, 14"	• 10 Year Warranty
Legal Heading	R	
DOT/SAE	J593	

M25100L LED LICENSE LIGHTS 2-STUD MOUNT



M25100L

PART NUMBER	DESCRIPTION
M25100L	LED LICENSE LIGHT 2-STUD
M25100L-X	LED LICENSE LIGHT 2-STUD – BULK PACK

LEDs	4
Lumens	50
Voltage	12.8VDC
Amp Draw	70mA
Dimensions	2.7" W x 1.6" H x 2.8" D
Mounting	2 #10 Studs, 1-7/8" Center to Center
Connector	2 Leads Blunt Cut, 4"
Legal Heading	L
DOT/SAE	SAE J587

- DOT FMVSS108 Compliant LED License Light
- 2-Stud Mount
- 1-Lamp or 2-Lamp Systems
- Acrylic Lens and PVC Housing
- Retail Pack or Bulk Pack
- 5 Year Warranty

M25102L LED LICENSE LIGHTS AND LICENSE PLATE BRACKET



M25102LBLK-X




M25102LCH-X

PART NUMBER	DESCRIPTION
M25102LBLK-X	LED LICENSE LIGHT AND BRACKET, BLACK HOUSING
M25102LCH-X	LED LICENSE LIGHT AND BRACKET, CHROME HOUSING

LEDs	2
Lumens	45
Voltage	12.8VDC
Amp Draw	35mA
Dimensions	8.5" W x 2.9" H x 2.3" D
Mounting	2 Hole Surface 3.5" Center to Center
- License Plate Mount:	2 Oval Slots 6-3/8" C to C, 5.75" min—7.0" max
Connector	2 Leads Blunt Cut, 6"
Legal Heading	L
DOT/SAE	SAE J587

- DOT FMVSS108 Compliant LED License Light
- LED License Light and License Plate Bracket Assembly
- 1-Lamp System
- Includes License Plate Mounting Kit
- Individually Bagged
- Bulk Pack Only
- 5 Year Warranty



SIDE



FRONT



BACK

M25201L ROUND LED LICENSE LIGHT



PART NUMBER DESCRIPTION

M25201L 1" ROUND X 1.75", STEEL BRACKET

M25201L-X 1" ROUND X 1.75", STEEL BRACKET – BULK PACK

LEDs	4	• DOT FMVSS108 Compliant LED
Lumens	12	License Light
Voltage	12.8VDC	• 2-Lamp Systems
Amp Draw	40mA	• Polycarbonate Lens and
Dimensions	1.5" Diam. x 1.75" Deep	Aluminum Housing
Mounting	1.25" Hole	• Retail Pack or Bulk Pack
Connector	2 Leads Blunt Cut, 7"	• 5 Year Warranty
Legal Heading	L	
DOT/SAE	SAE J587	

M25200L / M25202L-X LED LICENSE LIGHT WITH BEZEL



PART NUMBER DESCRIPTION

M25200L 1.7" X 1" WITH BEZEL, BLUNT CUT WIRES

M25200L-X 1.7" X 1" WITH BEZEL, BLUNT CUT – BULK PACK

M25202L-X 1.7" X 1" WITH BEZEL, PL-10 CONNECTOR – BULK PACK

LEDs	4	• DOT FMVSS108 Compliant LED
Lumens	70	License Light
Voltage	12.8VDC	• 1-Lamp or 2-Lamp Systems
Amp Draw	90mA	• Acrylic Lens and Aluminum Housing
Dimensions		• Retail Pack or Bulk Pack
- Light only	1.7" W x 0.75" H x 0.96" D	• 5 Year Warranty
- With Bezel	2.5" W x 0.9" H x 1.2" D	
Mounting	2 Hole Surface 2" Center to Center	
Connector	2 Leads Blunt Cut, 12"	
- M25202L	2 Female PL-10, 12"	
Legal Heading	L	
DOT/SAE	SAE J587	

M25210L-X ROUND 2" TALL LED LICENSE LIGHT



PART NUMBER DESCRIPTION

M25210L-X 1.4" ROUND X 2.0" STEEL BRACKET – BULK PACK

LEDs	2	• DOT FMVSS108 Compliant LED
Lumens	55	License Light
Voltage	12.8VDC	• 1-Lamp or 2-Lamp Systems
Amp Draw	100mA	• Bulk Pack Only
Dimensions	2.75" W x 1.5" H x 2.0" D	• Polycarbonate Lens
Mounting	2 Hole Surface 1.95" Center to Center	• Steel Base with Chrome-Plated
Connector	2 Leads Blunt Cut, 5.5"	Steel Housing
Legal Heading	L	• 5 Year Warranty
DOT/SAE	J587	

M25300-SERIES LED LICENSE LIGHT 1" X 2-1/2" RECTANGLE

M25301L
with .180 BulletsM25302L
with Female PL-10M50250
Sold SeparatelyShown with
M25302L
Sold Separately

PART NUMBER DESCRIPTION

M25301L	2-1/2" X 1" RECTANGULAR WITH .180 MALE BULLETS
M25301L-X	2-1/2" X 1" RECTANGULAR WITH .180 MALE BULLETS – BULK PACK
M25302L	2-1/2" X 1" RECTANGULAR WITH FEMALE PL-10
M25302L-X	2-1/2" X 1" RECTANGULAR WITH FEMALE PL-10 – BULK PACK
M50250	GREY MOUNTING BRACKET FOR M25301L / M25302L

LEDs	4	• DOT FMVSS108 Compliant LED License Light
Lumens	50	• Or Courtesy Light
Voltage	12.8VDC	• 1-Lamp System
Amp Draw	60mA	—Top or Side Mount
Dimensions	2.5" W x 1.2" H x 1.1" D	• Lights and Brackets Sold Separately
Mounting	- M50250 Bracket: 3.4" W x 2.6" H x 2.2" D - Or Base Mount: M20325, M20326, M20327, M20328	• Retail or Bulk Pack
Connector		• 5 Year Warranty
Legal Heading	L	
DOT/SAE	SAE J587	

M25930L LED LICENSE LIGHT 3.4" GROMMET MOUNT



8" Lead .180 Bullet Terminals

PART NUMBER DESCRIPTION

M25930L	3/4" GROMMET WITH HOOD
---------	------------------------

LED	1	• DOT FMVSS108 Compliant LED License Light
Lumens	40	• For 2-Lamp Systems
Voltage	12.8VDC	• Fits Standard 3/4" Hole
Amp Draw	50mA	• Hooded Grommet Included
Dimensions	0.75" Diam. x 1" H	• Optional Courtesy Light, 40 Lumens
Mounting	Grommet – 3/4" Hole Cutout	• Polycarbonate Lens & Housing
Connector	2 Leads .180 Bullets, 8"	• 5 Year Warranty
Legal Heading	DOT SAE (2) L	
DOT/SAE	J587	

M25220L LED LICENSE LIGHT POLISHED STAINLESS STEEL HOUSING




PART NUMBER DESCRIPTION

M25220L	POLISHED STAINLESS STEEL HOUSING
---------	----------------------------------

LEDs	3	• DOT FMVSS108 Compliant LED License Light
Lumens	40	• For 2-Lamp Systems
Voltage	12.8VDC	• Polished Stainless Housing
Amp Draw	40mA	• Optional Step Well Light 40 Lumens
Dimensions	3.4" W x 1.36" H x 0.91" D	• Polycarbonate Lens & PC and Aluminum Housing
Mounting	2 Hole Surface 2.6" C to C	• 5 Year Warranty
Connector	10.156 Bullet & 1 Ring, 8"	
Legal Heading	DOT SAE (2) L	
DOT/SAE	J587	

7" RED & AMBER FLASHING WARNING LIGHTS

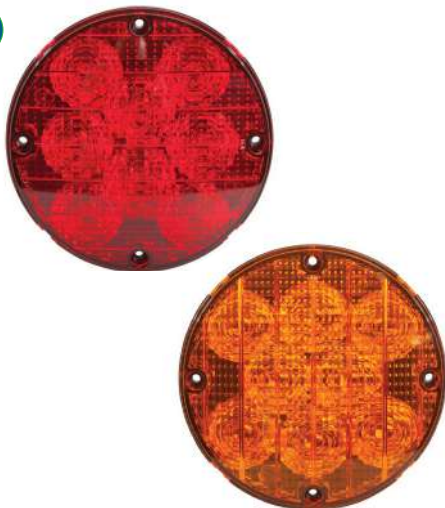

PART NUMBER	DESCRIPTION
M90070R	RED FLASHING WARNING
M90070Y	AMBER FLASHING WARNING
LEDs	8
Voltage	12.8VDC
Amp Draw	1.5A Red / 2.0A Amber
Dimensions	7.2" Diam. x 1.4" Depth
Mounting	4 Hole Surface
Connector	3 Wire 11" Leads
Legal Heading	SAE DOT W2
DOT/SAE	Red: J887, CA13 Amber: J887

- 7" Red/Amber Warning
- Two Flash Patterns Slow/Fast
- Polycarbonate Lens & Housing
- Mounting Gasket Included
- 5 Year Warranty

7" BACK-UP



PART NUMBER	DESCRIPTION
M90450	7" WHITE BACK-UP
LEDs	20
Voltage	12.8VDC
Amp Draw	250mA
Dimensions	7.0" Diam. x 1.2" Depth
Mounting	4 Hole Surface
Connector	2 Wire Leads
Legal Heading	R
DOT/SAE	J593

- 7" White Back-Up Light
- 4 Hole Surface Mount
- Mounting Gasket Included
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- 5 Year Warranty

7" STOP/TURN/TAIL & 7" FRONT/REAR/TURN



PART NUMBER	DESCRIPTION
M90061R	RED STT
M90081Y	AMBER PFT/PRT
LEDs	17
Voltage	12.8VDC
Amp Draw	120mA Red / 280mA Amber
Dimensions	7.0" Diam. x 1.2" Depth
Mounting	4 Hole Surface
Connector	3 Wire Leads
Legal Heading	A I6 S2 T2 (Red) A I6 P (Amber)
DOT/SAE	Red: J594, J2040, J2261 Amber: J594, J2261

- 7" Stop/Turn/Tail (Red)
- 7" Front/Rear Turn (Amber)
- Reflector Lens
- 4 Hole Surface Mount
- Mounting Gasket Included
- Moisture Proof Sealed Electronics
- Polycarbonate Lens & Housing
- 5 Year Warranty



LED DUAL VOLTAGE 12/24VDC

24VDC CONVERTER — 24VDC TO 12VDC 1 & 2 AMP STEP DOWN MODULES



PART NUMBER	DESCRIPTION
M50909	1 AMP 24VDC/12VDC CONVERTER
M50913	2 AMP 24VDC/12VDC CONVERTER
Voltage	24VDC
Max Amp	1A (M50909) 2A (M50913)
Dimensions	M50909: 4.0" W x 0.9" H x 0.5" D M50913: 2.8" W x 2.3" H x 1.8" D
Connector	4 Leads Blunt Cut, 3"

- 24VDC input, 12VDC output allows 12V lights to be used on 24V system
- 1 Year Warranty

4" ROUND RED STT



Lightning



M42322R-DV



M42322R-DVDF

PART NUMBER	DESCRIPTION
M42322R-DV	4" RED STT – DUAL VOLTAGE
M42322R-DVDF	4" RED STT – DUAL VOLTAGE - DryFit
LEDs	9
Voltage	12/24VDC
Amp Draw	170mA 12V / 85mA 24V
Dimensions	4.3" Diam x 1.8" Depth
Mounting	Grommet
Connector	PL-3
- M42322R-DV	PL-3
- M42322R-DVDF	DryFit
Legal Heading	I6 S2 T2
DOT/SAE	J2040, J2261

- 4" Round Red STT
- Auto Select 12/24VDC Voltage
- Patented Lightning Lens Optics
- US Patent No. 8,009,364
- US Patent No. 8,717,679 B2
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- 5 Year Warranty

4" ROUND BACK-UP



Lightning



PART NUMBER	DESCRIPTION
M42324-ADV	4" WHITE BU – DUAL VOLTAGE
LEDs	18
Voltage	12/24VDC
Amp Draw	280mA 12V / 190mA 24V
Dimensions	4.3"Diam. x 1.9" Depth
Mounting	Grommet
Connector	PL-3
Legal Heading	R
DOT/SAE	J593

- 4" Round Back-Up
- Auto Select 12/24VDC Voltage
- Patented Lightning Lens Optics
- US Patent No. 8,009,364
- US Patent No. 8,717,679 B2
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- 5 Year Warranty

6" OVAL RED STT



Lightning



PART NUMBER	DESCRIPTION
M63322R-DV	6" OVAL RED STT – DUAL VOLTAGE
LEDs	9
Voltage	12/24VDC
Amp Draw	140mA 12V / 80mA 24V
Dimensions	6.4" W x 2.2" H x 1.7" D
Mounting	Grommet
Connector	PL-3
Legal Heading	I6 S2 T2
DOT/SAE	J2040, J2261

- 6" Oval Red STT
- Auto Select 12/24VDC Voltage
- Patented Lightning Lens Optics
- US Patent No. 8,009,364
- US Patent No. 8,717,679 B2
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- 5 Year Warranty

AMBER LED TURN SIGNALS

NEW

4" ROUND AMBER PARK/FRONT/REAR TURN — GROMMET MOUNT



Lightning



M42339YCL



M42339YCL



M42339YDF

NEW

PART NUMBER	DESCRIPTION
M42339Y	4" AMBER
M42339YCL	4" AMBER CLEAR LENS
M42339YDF	4" AMBER, DryFit

LEDs	9	• 4" Round Amber
Voltage	12.8VDC	• Park/Front Turn/Rear Turn
Amp Draw	180mA	• Available in Amber (Y) or Amber Clear Lens (YCL) with Integrated PL-3 Connector
Dimensions	4.3" Diam x 1.8" Depth	• Available in Amber with Integrated DryFit Connector (YDF)
Mounting	Grommet	• Patented Lightning Optics
Connector		• US Patent No. 8,009,364
- M42339Y	PL-3	• US Patent No. 8,717,679 B2
- M42339YDF	DryFit	• Polycarbonate Lens & Housing
Legal Heading	I6 P	• 5 Year Warranty
DOT/SAE	J222, J2261	

NEW

4" ROUND AMBER PARK/FRONT/REAR TURN — SURFACE MOUNT



Lightning




PART NUMBER	DESCRIPTION
M42321Y	4" AMBER

LEDs	9	• 4" Round Amber
Voltage	12.8VDC	• Park/Front Turn/Rear Turn
Amp Draw	130 mA 15mA	• Patented Lightning Lens Optics
Dimensions	5.5" Diam. x 0.9" D	• US Patent No. 8,009,364
Mounting	3 Hole, 5" Bolt Circle	• US Patent No. 8,717,679 B2
Connector	3 Leads Blunt Cut, 12"	• Polycarbonate Lens & Housing
Legal Heading	I6 P	• 5 Year Warranty
DOT/SAE	J222, J2261	

4" ROUND FLANGE MOUNT AMBER PARK/REFLEX/REAR TURN



Lightning



PART NUMBER	DESCRIPTION
M42354Y-X	AMBER FLANGE MOUNT

LEDs	7	• 4" Round Amber Flange Mount
Voltage	12.8VDC	• Park/Reflex/Rear Turn
Amp Draw	160mA	• Thin Low Profile Design
Dimensions	5.6" Diam. x 0.7" Depth	• Lightning Patented Lens
Mounting	3 Hole Flange	• US Patent No. 8,009,364
Connector	PL-3	• US Patent No. 8,717,679 B2
Legal Heading	A I6 P	• Acrylic Lens/Polycarbonate Housing
DOT/SAE	J222, J594, J2261	• Neoprene Gasket Included
		• 5 Year Warranty

6" OVAL AMBER PARK/REAR TURN — 14 LED



PART NUMBER	DESCRIPTION
M63350Y	AMBER — SURFACE OR GROMMET MOUNT
M63351Y-X	AMBER WITH .180 BULLETS — SURFACE OR GROMMET MOUNT
M50607	LOW PROFILE GROMMET
LEDs	14
Voltage	12.8VDC
Amp Draw	290mA
Dimensions	6.5" W x 2.3" H x 0.5" D
Mounting	2 Hole Surface, 5.5" C to C, or Optional M50607 Grommet
Connector	
- M63350Y	3 Leads Blunt Cut, 6"
- M63351Y-X	3 Leads, .180 Bullets, 6"
Legal Heading	I6 P
DOT/SAE	J222, J2261

- 6" Oval Amber Park/Rear Turn
- Also Available in Bulk Pack (-X)
- Surface Mount—Mounting Screws & Caps Included, or Optional M50607 Grommet Mount
- Polycarbonate Lens & Housing
- Reinforced Riveted Mounting Holes

NEW

6" OVAL AMBER PARK/FRONT/REAR TURN — 9 LED



Lightning



M63339Y



PART NUMBER	DESCRIPTION
M63339Y	AMBER - GROMMET MOUNT
M63339YDF	AMBER - GROMMET MOUNT — DryFit
M63339YCL	AMBER CLEAR LENS — GROMMET MOUNT
M63339YCLDF	AMBER CLEAR LENS — GROMMET MOUNT — DryFit
LEDs	9
Voltage	12.8VDC
Amp Draw	180mA / 10mA
Dimensions	6.4" W x 2.2" H x 1.7" D
Mounting	Grommet
Connector	PL-3 or DryFit (DF Models)
Legal Heading	I6 P
DOT/SAE	J222, J2261

- 6" Oval Amber
- Park/Front Turn/Rear Turn
- Patented Lightning Optics
- US Patent No. 8,009,364
- US Patent No. 8,717,679 B2
- Available in PL-3 or DryFit
- Polycarbonate Lens & Housing
- 5 Year Warranty

6" OVAL AMBER PARK/FRONT/REAR TURN — 60 LED



PART NUMBER	DESCRIPTION
M63100Y	AMBER
M63100YDF	AMBER — DryFit
LEDs	60
Voltage	12.8VDC
Amp Draw	0.7 A
Dimensions	6.4" W x 2.2" H x 1.7" D
Mounting	Oval Grommet
Connector	PL-3 or DryFit
Legal Heading	I6 P P2 P3
DOT/SAE	J592, J222, J2042, J2261

- 6" Oval Amber
- Park/Front Turn/Rear Turn
- Available in PL-3 or DryFit
- Polycarbonate Lens & Housing
- 5 Year Warranty

NEW

OVAL AMBER PARK/FRONT/REAR TURN SURFACE MOUNT 15 LED



PART NUMBER	DESCRIPTION
M63320Y-A	AMBER WITH PL-3 — SURFACE MOUNT
LEDs	10
Voltage	12.8VDC
Amp Draw	250mA
Dimensions	7.8" W x 3.5" H x 0.7" D
Mounting	2 Surface, 7-1/4" C to C
Connector	3 Leads, PL-3, 13"
Legal Heading	I6 P
DOT/SAE	J222, J2261

- New A-Series Design, Sleek Look
- 6" Oval Surface Mount
- Park/Front Turn/Rear Turn
- Horizontal or Vertical Mount
- Polycarbonate Lens & Housing
- Low Profile Design
- 5 Year Warranty

NEW



3" X 5" RECTANGULAR PARK/FRONT/REAR TURN



M42213Y-A



M42213YCL-A

PART NUMBER	DESCRIPTION
M42213Y-A	AMBER
M42213YCL-A	AMBER CLEAR LENS
LEDs	10
Voltage	12.8VDC
Amp Draw	270mA / 30mA
Dimensions	5.3" W x 3.4" H x 1.5" D
Mounting	Rectangle Grommet
Connector	PL-3
Legal Heading	I6 P P2
DOT/SAE	J222, J592, J2261

- 5" Rectangular
- Park/Front Turn/Rear Turn
- Horizontal or Vertical Mount
- Acrylic Lens
- Polycarbonate Housing
- 5 Year Warranty

SURFACE MOUNT 0.4" ULTRA THIN AMBER PARK/REAR TURN



Optional
M42206-Adhesive

PART NUMBER	DESCRIPTION
M42206Y	AMBER
M42206-ADHESIVE	OPTIONAL MOUNTING TAPE
LEDs	14
Voltage	12.8VDC
Amp Draw	290mA
Dimensions	4.6" W x 2.5" H x 0.4" D
Mounting	2 Hole 3-7/8" C to C, or Tape
Connector	3 Leads, Blunt Cut, 7"
Legal Heading	I P
DOT/SAE	J222, J588

- Park/Rear Turn
- Also Available in Bulk Pack (-X)
- Ultra Thin .04" Low Profile Design
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- 5 Year Warranty

SURFACE MOUNT RECTANGULAR PARK/REAR TURN



PART NUMBER	DESCRIPTION
M63318Y-A	AMBER
M63318YCL-A	AMBER CLEAR LENS
LEDs	10
Voltage	12.8VDC
Amp Draw	300mA
Dimensions	15.4" L x 1.2" W x 0.7" D
Mounting	Surface Vertical & Horizontal
Connector	3 Leads Blunt Cut, 14"
Legal Heading	I P
DOT/SAE	J222, J588

- Park/Rear Turn
- Horizontal & Vertical 2 Hole Mount
- Compact Thin Low Profile Design
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- 10 Year Warranty

LED DOUBLE FACE PEDESTAL LIGHTS

SQUARE CHROME DOUBLE FACE PEDESTAL



M42360R/Y-A



M42362R/Y-A



M42363RYCL-A



M42364Y/Y

PART NUMBER	DESCRIPTION	LEDs	
M42360R/Y-A	SINGLE POST LEFT HAND	13 Red / 14 Amber	• Square Chrome Double Face Pedestal • Patented Lightning Optics • US Patent No. 8,009,364 • US Patent No. 8,717,679 B2 • Polycarbonate Front & Rear Lens • Double Insulated Waterproof Modules • Epoxy Sealed Electronics • P2 P3 Side Marker • Available Single or Double Post • 5 Year Warranty
M42361R/Y-A	SINGLE POST RIGHT HAND	27 Amber Y/Y	
M42362R/Y-A	DOUBLE POST LEFT HAND	12.8VDC	
M42363R/Y-A	DOUBLE POST RIGHT HAND	0.4A	
M42362RYCL-A	DOUBLE POST LEFT HAND CLEAR LENS	4.5" W x 4.5" H x 1.8" D	
M42363RYCL-A	DOUBLE POST RIGHT HAND CLEAR LENS	Post	
M42364Y/Y	DOUBLE POST AMBER/AMBER	3 Leads Blunt Cut, 7"	
		Connector	
		Legal Heading	
		DOT/SAE	

ROUND DOUBLE FACE PEDESTAL




PART NUMBER	DESCRIPTION	LEDs	
M42341R/Y	RED/AMBER	15 Red / 15 Amber	• Round Chrome Double Face Pedestal • Red STT or Amber PFRT • Patented Lightning Optics • US Patent No. 8,009,364 • US Patent No. 8,717,679 B2 • Polycarbonate Front & Rear Lens • Single Post • Sealed Moisture Proof Electronics • 5 Year Warranty
M42341RYCL	RED/AMBER CLEAR LENS	15 Amber / 15 Amber	
M42341Y/Y	AMBER/AMBER	12.8VDC	
		0.4A	
		4.3" Diam. x 2.0" Depth	
		Mounting	
		Connector	
		Legal Heading	
		DOT/SAE	

6" OVAL AMBER SIDE TURN/SIDE MARKER



PART NUMBER	DESCRIPTION
M63121Y	AMBER SIDE TURN WITH PL-3 CONNECTOR
M63121YDF	AMBER SIDE TURN WITH DryFit CONNECTOR
LEDs	28 • 6" Oval Amber
Voltage	12.8VDC • Side Turn / Side Marker / Reflex
Amp Draw	540mA / 25mA • Sealed Moisture Proof Electronics
Dimensions	6.5" W x 2.2" H x 2.8" D • Acrylic Lens
Mounting	Grommet • Polycarbonate Housing
Connector	PL-3 or DryFit • 5 Year Warranty
Legal Heading	A E P2 P3
DOT/SAE	J592, J594, J2039, J2042

FREIGHTLINER® REPLACEMENT SIDE TURN/SIDE MARKER LIGHT

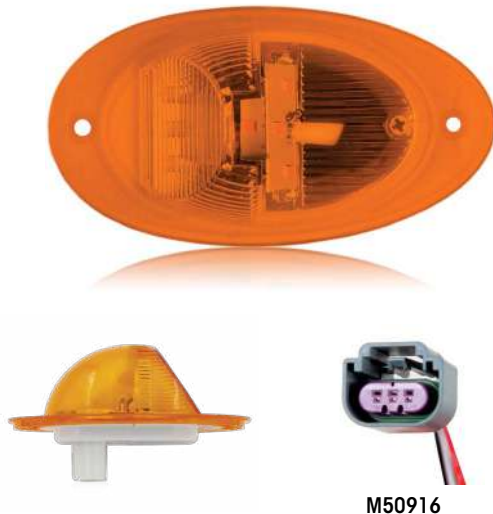

M50916

PART NUMBER	DESCRIPTION
M63123Y	AMBER
M50916	OPTIONAL 3-PIN DELPHI CONNECTOR
LEDs	7 • Freightliner replacement
Voltage	12.8VDC • Plugs into OEM harness
Amp Draw	420mA • Low LED Amp Draw
Dimensions	5.1" W x 2.7" H x 2.9" D • Polycarbonate Lens & Housing
Mounting	Two Hole • 5 Year Warranty
Connector	3-Pin Delphi GT 150
Legal Heading	E P2 P3
DOT/SAE	J592, J2039, J2042

* FREIGHTLINER IS A REGISTERED TRADEMARK OF DAIMLER TRUCKS N.A.

PETERBILT® REPLACEMENT OVAL AMBER SIDE TURN/SIDE MARKER



Lightning



PART NUMBER	DESCRIPTION
M63122Y	AMBER
LEDs	9 • Peterbilt Replacement
Voltage	12.8VDC • Patented Lightning Lens Optics
Amp Draw	100mA • US Patent No. 8,009,364
Dimensions	4.4" W x 2.1" H x 1.4" D • US Patent No. 8,717,679 B2
Mounting	Two Stud Mount • Polycarbonate Lens & Housing
Connector	3 Leads Blunt Cut, 11" • Stainless Steel Bolts & Nuts
Legal Heading	E2 P2 P3 • 5 Year Warranty
DOT/SAE	J592, J914, J2042

* PETERBILT IS A REGISTERED TRADEMARK OF PACCAR

LED CLEARANCE MARKER LIGHTS

- DUAL COLOR / DUAL FUNCTION
- 3/4" AND 1-1/4"
- 2" AND 2-1/2"
- OE-STYLE
- ID BARS



LED CLEARANCE MARKERS

LED CLEARANCE MARKER

NEW DUAL FUNCTION CLEARANCE / MARKER AND WHITE GROUND LIGHT



HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

NEW

NEW M23025-SERIES CLEARANCE MARKER — WITH GROUND LIGHT



WHITE
LEDs

M23025YW-DC AMBER/BLUE

NEW
NEW



BLUE
LEDs

M23025YB-DC AMBER/BLUE



DOWNWARD
GROUND
ILLUMINATION
LIGHT

PART NUMBER	DESCRIPTION
M23025RW-DC	RED CM AND WHITE GROUND LIGHT
M23025RW-DCDV	RED CM AND WHITE GROUND LIGHT – 12/24VDC
M23025YW-DC	AMBER CM AND WHITE GROUND LIGHT
M23025YW-DCDV	AMBER CM AND WHITE GROUND LIGHT – 12/24VDC
M23025RB-DC	RED CM AND BLUE AUX. GROUND LIGHT
M23025YB-DC	AMBER CM AND BLUE AUX. GROUND LIGHT

LEDs	16 (10 + 6 White/Blue)	• DOT FMVSS108 Compliant LED
Voltage	12.8VDC or 12/24VDC (-DV Models)	Clearance Marker
Amp Draw		• And Secondary Aux Ground Light
- DC	C/M: 160mA Aux: 70mA	• 70 Lumen White Light
- DCDV	C/M: 160mA 12V / 80mA 24V	Directed Downward
	Aux: 70mA 12V / 40mA 24V	• Available in 12-Volt Only Models
Dimensions	4.0" W x 2.0" H x 1.0" D	or 12/24VDC Dual Voltage (-DCDV)
Mounting	2 Hole Surface, 3" C to C	• Same Mounting Footprint
Connector	3 Leads, 2 .180 Bullet, 1 Ring, 5"	as M23015R/Y
Legal Heading	P2 P3 PC2	• Polycarbonate Lens & Housing
DOT/SAE	J592, J2042	• 5 Year Warranty

Same size and design as our popular M23015-Series but with White Ground Light added

M17300YWCL-DC DUAL-COLOR



M17300RWCL-DC



M17300YWCL-DC



PART NUMBER	DESCRIPTION
M17300RWCL-DC	RED CLEAR LENS CM AND WHITE GROUND LIGHT
M17300YWCL-DC	AMBER CLEAR LENS CM AND WHITE GROUND LIGHT

LEDs	12 (6 Amber, 6 White, or 6 Red, 6 White)	• OE-Style Clearance Marker with Ground Illumination
Lumens	85	• White LEDs 85 Lumens
Voltage	12.8VDC	• White LEDs directed downward toward the side of the vehicle for improved driver safety
Amp Draw	CM 80mA, Ground Light 110mA	• Polycarbonate Lens, PC and ABS Housing
Dimensions	5.1" W x 1.5" H x 1.1" D	• Same Mounting Footprint as M20332-Series
Mounting	2 Hole Surface, 3-15/16" Center to Center	• Dedicated (discrete) wire for ground illumination allows installer to put it on a dedicated switch
Connector	3 Leads: (1) Ring, (2) .180 bullets, 7"	• 5 Year Warranty
Legal Heading	P2 P3	
DOT/SAE	J592, J2042	

DOWNWARD GROUND
ILLUMINATION LIGHT

1-1/4" CLEARANCE MARKER & FLASHING WARNING, 2 LIGHTS IN 1



AVAILABLE IN RED/AMBER



AMBER



RED



AMBER



RED



AMBER/WHITE



RED/WHITE

SHOWN WITH OPTIONAL
M50118 Stainless Steel Bezel1-1/4" Light Head
Fits 3/4" Hole

PART NUMBER DESCRIPTION

M09450RYCL-DC	1-1/4" ROUND CM RED/AMBER AND FLASHING WARNING
M09450RCL-DC	1-1/4" ROUND CM RED AND FLASHING WARNING
M09450RWCL-DC	1-1/4" ROUND CM RED-WHITE AND FLASHING WARNING
M09450YCL-DC	1-1/4" ROUND CM AMBER AND FLASHING WARNING
M09450YWCL-DC	1-1/4" ROUND CM AMBER CLEAR LENS AND FLASHING WARNING
M50118	OPTIONAL 1-1/4" STAINLESS STEEL GROMMET COVER

LEDs	4 (YCL-DC: 4 Amber) (YWCL-DC: 2 Amber, 2 White) (RCL-DC: 4 Red) (RWCL-DC: 2 Red, 2 White) (RYCL-DC: 2 Red, 2 Amber)	• DOT FMVSS 108 Compliant - Red/Amber P2 P3 (in Red) - Red and Red / White P2 - Amber and Amber/White P2 P3 PC2
Voltage	12.8VDC	• And Flashing Warning Device
Amp Draw	140mA Max Amp	• SAE J595 Class 2 and Class 3
Dimensions		• Available in 5 models (Red, Red / Amber, Red/White, Amber, Amber / White)
- Light Only	1.25" Diam. x 0.6" H (1.2" OAL)	• Built-in Flasher - 28 Patterns
- Grommet	1.75" Diam. (Grommet)	• Polycarbonate Lens and Housing
Mounting	Grommet fits 3/4" Hole	• 5 Year Warranty
Connector	4 Jacketed Leads 180 Bullets, 7"	
Legal Heading		
- Red / Amber	P2 P3, W-2	
- Amber Models	P2 P3 PC2, W-2	
- Red Models	P2, W-2	
SAE		
- Red / Amber	J592, J2042, J595 Class 2	
- Amber Models	J592, J2042, J595 Class 2	
- Red Models	J592, J595 Class 2	

3/4" MINI COMBINATION CLEARANCE MARKER — BULK PACK ONLY



Lightning

Optional
M50112 Bezel

PART NUMBER DESCRIPTION

M09330R-X	RED BULLET CONNECTOR – BULK PACK
M09330Y-X	AMBER BULLET CONNECTOR – BULK PACK
M09330Y-XBC	AMBER BLUNT CUT WIRE – BULK PACK
M09330R-XBC	RED BLUNT CUT WIRE – BULK PACK
M50112	STAINLESS STEEL BEZEL
M50125	OPTIONAL WIDE CHANNEL GROMMET

LED	1	• Bulk Pack Only
Voltage	12.8VDC	• Polycarbonate Lens/Housing
Amp Draw	60mA	• Grommet Included
Dimensions	0.75" Diam. x 1" D	• Lightning Lens Optics
Mounting	3/4" Hole	• US Patent Number 8,009,364
Connector	2 Leads, .180 Bullets or Blunt Cut, 7"	• US Patent No. 8,717,679 B2
Legal Heading	P2 P3 PC2	• Optional M50112 Stainless Bezel
DOT/SAE	J592, J2042	• 5 Year Warranty

ADDITIONAL COLOR - SEE PG. 44

3/4" MINI COMBINATION CLEARANCE MARKERS



M09300R



M09300Y



M09300RCL



M09300YCL



OPTIONAL M50112 BEZEL



PART NUMBER	DESCRIPTION
M09300R	RED
M09300R-X	RED – BULK PACK
M09300R-XBC	RED, BLUNT CUT – BULK PACK
M09300RCL	RED CLEAR LENS
M09300Y	AMBER
M09300Y-X	AMBER – BULK PACK
M09300Y-XBC	AMBER, BLUNT CUT – BULK PACK
M09300YCL	AMBER CLEAR LENS
M50112	STAINLESS STEEL BEZEL
M50125	OPTIONAL WIDE CHANNEL GROMMET

LEDs

3

Voltage

12.8VDC

Amp Draw

R: 60mA, RCL: 50mA, Y/YCL: 30mA

Dimensions

3/4" Diam. x 1" D

Mounting

Grommet - 3/4" Hole Cutout

Connector

2 Jacketed Leads, .180 Bullets, 7"

Legal Heading

P2 P3 PC2

DOT/SAE

J592, J2042

• Also Available in Bulk Pack (-X)

• Polycarbonate Lens/Housing

• Grommet Included

• Optional M50112 Stainless Bezel

• 5 Year Warranty

ADDITIONAL COLORS - SEE PG. 44**NEW**

NEW M09340-DC 3/4" CLEARANCE MARKER — DUAL COLOR — WITH AUX. LIGHT



AMBER/RED

PART NUMBER	DESCRIPTION
M09340YR-DC	3/4" ROUND CM AMBER WITH RED
M09340RW-DC	3/4" ROUND CM RED WITH WHITE AUX
M09340YW-DC	3/4" ROUND CM AMBER WITH WHITE AUX
M09340RBL-DC	3/4" ROUND CM RED WITH BLUE AUX
M09340YBL-DC	3/4" ROUND CM AMBER WITH BLUE AUX
M09340RG-DC	3/4" ROUND CM RED WITH GREEN AUX
M09340YG-DC	3/4" ROUND CM AMBER WITH GREEN AUX
M09340RP-DC	3/4" ROUND CM RED WITH PURPLE AUX
M09340YP-DC	3/4" ROUND CM AMBER WITH PURPLE AUX

LEDs

4 (2 of each color)

Voltage

12.8VDC

Amp Draw

30mA

Dimensions

0.75" Diam. x 1" H

Mounting

3/4" Mounting Hole

Connector

3 Leads .180 Bullets, 8"

Legal Heading

P2 P3

DOT/SAE

J592, J2042

• DOT FMVSS108 Compliant LED C/M

• AND Secondary Aux Light available in

White, Blue, Green, or Purple

• Available in 9 Color Combinations

• Polycarbonate Lens

• Optional Stainless Steel

Bezel Included

• 5 Year Warranty



RED/WHITE



RED/BLUE



RED/GREEN



RED/PURPLE



AMBER/WHITE



AMBER/BLUE



AMBER/GREEN



AMBER/PURPLE

1.25" MINI GROMMET OR TAPE MOUNT COMBINATION CLEARANCE MARKERS

Optional
M50118 BezelOptional
3M Tape Mount

M09410Y Side



M09411Y-X Side

PART NUMBER DESCRIPTION

M09410R	RED
M09410R-X	RED – BULK PACK
M09410Y	AMBER
M09410Y-X	AMBER – BULK PACK
M09411R-X	RED WITH WIDE CHANNEL GROMMET – BULK PACK
M09411Y-X	AMBER WITH WIDE CHANNEL GROMMET – BULK PACK
M50118	STAINLESS STEEL BEZEL
M50132	BLACK GROMMET

LEDs	6	• Also Available in Bulk Pack (-X)
Voltage	12.8VDC	• Patented Lightning Lens Optics
Amp Draw	80mA	• US Patent No. 8,009,364
Dimensions	1-1/4" Diam.	• US Patent No. 8,717,679 B2
Mounting	Grommet 3/4" Hole or Tape Mount	• Polycarbonate Lens & Housing
Connector	2 Jacketed Leads, .180 Bullets, 7"	• Grommet and Tape Mount Included
Legal Heading	P2 P3 PC2	• 5 Year Warranty
DOT/SAE	J592, J2042	

ADDITIONAL COLORS - SEE PG. 44

1.25" MINI COMBINATION CLEARANCE MARKERS



M09400RCL

M09400YCL



M09400R Side

Optional
M50118 Bezel

PART NUMBER DESCRIPTION

M09400R	RED
M09400RCL	RED CLEAR LENS
M09400Y	AMBER
M09400Y-X	AMBER – BULK PACK
M09400Y-XBC	AMBER, BLUNT CUT – BULK PACK
M09400YCL	AMBER CLEAR LENS
M50118	STAINLESS STEEL BEZEL
M50132	BLACK GROMMET

LEDs	6	• Available in Retail or -X Bulk Pack
Voltage	12.8VDC	• Space Saving Design
Amp Draw	40mA	• Patented Lightning Lens Optics
Dimensions	1-1/4" Diam.	• US Patent No. 8,009,364
Mounting	Grommet – 1-3/8" Hole Cutout	• US Patent No. 8,717,679 B2
Connector	2 Jacketed Leads, .180 Bullets, 7"	• Polycarbonate Lens/Housing
Legal Heading	P2 P3 PC2	• Grommet Included
DOT/SAE	J592, J2042	• Sealed Moisture Proof Electronics
		• Optional Stainless Steel Bezel
		• 5 Year Warranty

ADDITIONAL COLORS - SEE PG. 44

2" ROUND CLEARANCE MARKER



RCL & YCL Clear Lens

ABS Light

PART NUMBER	DESCRIPTION
M09100R	RED
M09100Y	AMBER
M09100RCL	RED CLEAR LENS
M09100YCL	AMBER CLEAR LENS
M09100ABS	2" AMBER ABS

LEDs	9
Voltage	12.8VDC
Amp Draw	100mA
Dimensions	2.0" Diam. x 0.7" Depth
Mounting	Grommet
Connector	PL-10
Legal Heading	P2 P3 & "ABS"
DOT/SAE	J592, J2042

- 2" Round Clearance Marker
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 10 Year Warranty

2" ROUND CLEARANCE MARKER



RCL & YCL Clear Lens

PART NUMBER	DESCRIPTION
M34260R	RED
M34260Y	AMBER
M34260RCL	RED CLEAR LENS
M34260YCL	AMBER CLEAR LENS

LEDs	6
Voltage	12.8VDC
Amp Draw	40mA
Dimensions	2.0" Diam. x 0.8" Depth
Mounting	Grommet
Connector	PL-10
Legal Heading	P2 P3
DOT/SAE	J592, J2042

- 2" Round Clearance Marker
- Also Available in Bulk Pack (-X)
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 5 Year Warranty

2" BEEHIVE CLEARANCE MARKER



PART NUMBER	DESCRIPTION
M09105R	RED
M09105Y	AMBER

LEDs	9
Voltage	12.8VDC
Amp Draw	60mA
Dimensions	2.0" Diam. x 1.8" Depth
Mounting	Grommet
Connector	PL-10
Legal Heading	P2 P3
DOT/SAE	J592, J2042

- 2" Beehive Clearance Marker
- Circular LED Pattern
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 10 Year Warranty

2-1/2" BEEHIVE CLEARANCE MARKER



PART NUMBER	DESCRIPTION
M11201R	RED
M11201Y	AMBER

LEDs	13
Voltage	12.8VDC
Amp Draw	70mA
Dimensions	2.5" Diam. x 2.4" Depth
Mounting	Grommet
Connector	PL-10
Legal Heading	P2 P3
DOT/SAE	J592, J2042

- 2-1/2" Beehive Clearance Marker
- Circular LED Pattern
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 10 Year Warranty

2-1/2" ROUND CLEARANCE MARKER

RCL & YCL
Clear Lens

PART NUMBER	DESCRIPTION
M11300R	RED
M11300Y	AMBER
M11300RCL	RED CLEAR LENS
M11300YCL	AMBER CLEAR LENS

LEDs	13
Voltage	12.8VDC
Amp Draw	100mA Red / 55mA Amber
Dimensions	2.5" Diam. x 0.7" Depth
Mounting	Grommet
Connector	PL-10
Legal Heading	P2 P3
DOT/SAE	J592, J2042

- 2-1/2" Round Clearance Marker
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 10 Year Warranty

2-1/2" ROUND CLEARANCE MARKER/ABS



ABS Light

PART NUMBER	DESCRIPTION
M16280R	RED
M16280Y	AMBER
M16280RCL	RED CLEAR LENS
M16280YCL	AMBER CLEAR LENS
M16280ABS	2-1/2" AMBER ABS

LEDs	8
Voltage	12.8VDC
Amp Draw	40mA
Dimensions	2.5" Diam. x 0.8" Depth
Mounting	Grommet
Connector	PL-10
Legal Heading	P2 P3 & "ABS"
DOT/SAE	J592, J2042

- 2-1/2" Round Amber ABS
- 2-1/2" Round Clearance Marker
- Also Available in Bulk Pack (-X)
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 5 Year Warranty

2-1/2" ROUND REFLEX REFLECTOR CLEARANCE MARKER



PART NUMBER	DESCRIPTION
M11256R	RED
M11256Y	AMBER

LED	1
Voltage	12.8VDC
Amp Draw	60mA
Dimensions	2.5" Diam. x 0.8" Depth
Mounting	Grommet
Connector	PL-10
Legal Heading	A P2 P3
DOT/SAE	J592, J594, J2042

- 2-1/2" Round Reflector CM
- Reflex Reflector Lens
- Acrylic Lens/Polycarbonate Housing
- Sealed Corrosion Proof Electronics
- Plated Brass Connector
- 10 Year Warranty

2-1/2" ROUND COMBINATION CLEARANCE MARKER — BULK PACK ONLY



PART NUMBER	DESCRIPTION
M11260R-X	RED
M11260Y-X	AMBER

LEDs	7
Voltage	12.8VDC
Amp Draw	100mA
Dimensions	2.5" Diam. x 0.9" Depth
Mounting	Grommet
Connector	PL-10
Legal Heading	P2 P3 PC2
DOT/SAE	J592, J2042

- 2-1/2" Round Combination Clearance Marker
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 10 Year Warranty

2-1/2" RECTANGULAR CLEARANCE MARKER



PART NUMBER	DESCRIPTION	MOUNTING ACCESSORIES
M20320R	RED	M20325 CHROME BASE W/SINGLE LEAD
M20320Y	AMBER	M20326 BLACK BASE W/SINGLE LEAD
M20320YCL	AMBER CLEAR LENS	M20327 BLACK BASE W/TWIN LEADS
		M20328 CHROME BASE W/TWIN LEADS

LEDs	8
Voltage	12.8VDC
Amp Draw	40mA
Dimensions	2.5" W x 1.3" H x 1.0" D
Mounting	Base
Connector	See Mounting Accessories
Legal Heading	P2 P3
DOT/SAE	J592, J2042

- 2-1/2" Rectangular Clearance Marker
- Plugs into Existing Mounting Base
- Polycarbonate Lens & Housing
- 10 Year Warranty

4" RECTANGULAR CLEARANCE MARKER




PART NUMBER	DESCRIPTION	MOUNTING ACCESSORIES
M20350R	RED	M20355 CHROME BASE W/SINGLE LEAD
M20350Y	AMBER	M20356 BLACK BASE W/SINGLE LEAD
M20350RY	DUAL RED/AMBER	M20357 BLACK BASE W/TWIN LEADS
M20350RCL	RED CLEAR LENS	M20358 CHROME BASE W/TWIN LEADS
M20350YCL	AMBER CLEAR LENS	

LEDs	12
Voltage	12.8VDC
Amp Draw	50mA Red, RY / 40mA Amber
Dimensions	3.8" W x 1.2" H x 0.9" D
Mounting	Base
Connector	See Mounting Accessories
Legal Heading	P2 P3 (M20350RY P2)
DOT/SAE	J592, J2042 (M20350RY J592)

- 4" Rectangular Clearance Marker
- Plugs into Existing Mounting Base
- Polycarbonate Lens & Housing
- 10 Year Warranty

4" RECTANGULAR CLEARANCE MARKERS

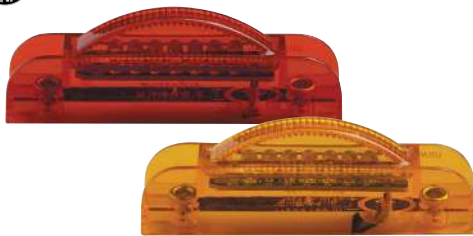

PART NUMBER	DESCRIPTION
M20340R	RED
M20340Y	AMBER

LEDs	7
Voltage	12.8VDC
Amp Draw	40mA
Dimensions	4.0" W x 0.8" H x 1.3" D
Mounting	2 Hole Surface, 3" C to C
Connector	0.180" Bullet & # 10 Ring Terminal
Legal Heading	P2 P3
DOT/SAE	J592 J2042

- Thin-Line Design Fits Rails
- Standard 3" Mounting Holes
- Polycarbonate Lens & Housing
- Completely Sealed
- 10 Year Warranty

4" RECTANGULAR CLEARANCE MARKERS — LOW PROFILE



M20342Y-JX and M20342R-JX

PART NUMBER	DESCRIPTION
M20341R	RED
M20341Y	AMBER
M20341RCL	RED CLEAR LENS
M20341YCL	AMBER CLEAR LENS
M20342R-JX	RED TWIN BULLET CONNECTORS
M20342Y-JX	AMBER TWIN BULLET CONNECTORS

LEDs	7
Voltage	12.8VDC
Amp Draw	100mA
Dimensions	4.0" W x 0.6" H x 0.7" D
Mounting	2 Hole Surface, 3" C to C 19/32 Hole Required

Connector	
M20341:	2 Leads, .180 Bullet & Ring, 6.5"
M20342:	2 Leads, .180 Bullets, 6.5"
Legal Heading	P2 P3 PC2
DOT/SAE	J592, J2042
Warranty	5 Year Warranty

4" COMBINATION CLEARANCE MARKER



PART NUMBER DESCRIPTION

M23015R	RED
M23015R-X	RED – BULK PACK
M23015Y	AMBER
M23015Y-X	AMBER – BULK PACK
M23015RCL	RED CLEAR LENS
M23015YCL	AMBER CLEAR LENS

LEDs	14
Voltage	12.8VDC
Amp Draw	110mA
Dimensions	4.0" W x 2.0" H x 1.0" D
Mounting	2 Hole Surface, 3" C to C
Connector	2 Leads, .180 Bullet & Ring, 6"
Legal Heading	P2 P3 PC2
DOT/SAE	J592 J2042

- 4" Combination Clearance Marker
- Polycarbonate Lens & Housing
- 5 Year Warranty

ADDITIONAL MODELS - SEE PG. 89

6" CLEARANCE MARKER



RCL & YCL Clear Lens



PART NUMBER DESCRIPTION

M20332R	RED WITH STAINLESS STEEL BEZEL
M20332Y	AMBER WITH STAINLESS STEEL BEZEL
M20332RCL	RED CLEAR LENS WITH STAINLESS STEEL BEZEL
M20332YCL	AMBER CLEAR LENS WITH STAINLESS STEEL BEZEL
M20332R-BLK	RED WITH BLACK STEEL BEZEL
M20332Y-BLK	AMBER WITH BLACK STEEL BEZEL

LEDs	12
Voltage	12.8VDC
Amp Draw	60mA
Dimensions	6.2" W x 1.8" H x 1.0" D
Mounting	2 Hole Surface, 3-15/16" C to C
Connector	2 Leads .180 Bullet & Ring, 6"
Legal Heading	P2 P3
DOT/SAE	J592, J2042

- 6" Clearance Marker
- Stainless Steel Bezel or New Black Bezel Models
- Polycarbonate Lens & Housing
- Solid State Circuit Board
- 10 Year Warranty

6" CLEARANCE MARKER



PART NUMBER DESCRIPTION

M30332R	RED
M30332Y	AMBER

LEDs	12
Voltage	12.8VDC
Amp Draw	160mA Red, 60mA Amber
Dimensions	6.2" W x 1.8" H x 0.8" D
Mounting	2 Hole Surface, 3-15/16" C to C
Connector	2 Leads, .180 Bullet & Ring, 6"
Legal Heading	P2 P3
DOT/SAE	J592, J2042

- Stainless Steel Bezel
- Hidden Mounting Screws
- New Style Replacement for M20332-Series
- Sealed Moisture Proof Electronics
- Solid State Circuit Board
- Polycarbonate Lens & Housing
- 5 Year Warranty

STAINLESS STEEL OVAL CLEARANCE MARKER



M36180YCL

PART NUMBER DESCRIPTION

M72270R	RED
M72270Y	AMBER
M72270RCL	RED CLEAR LENS
M72270YCL	AMBER CLEAR LENS

LEDs	13	• Stainless Oval Clearance Marker
Voltage	12.8VDC	• US Patent No. D514008
Amp Draw	60mA	• Snap On Stainless Steel Bezel
Dimensions	6.5" W x 2.0" H x 0.9" D	• Ideal for Cab & Sleeper Panels
Mounting	2 Hole Surface, 4-5/8" C to C	• Polycarbonate Lens & Housing
Connector	PL-10	• 10 Year Warranty
Legal Heading	P2 P3	
DOT/SAE	J592, J2042	

MINI STAINLESS STEEL CLEARANCE MARKER



M36180RCL

M36180YCL

PART NUMBER DESCRIPTION

M36180R	RED
M36180Y	AMBER
M36180RCL	RED CLEAR LENS
M36180YCL	AMBER CLEAR LENS

LEDs	7	• Mini Stainless Clearance Marker
Voltage	12.8VDC	• US Patent No. D514008
Amp Draw	50mA	• Snap-On Stainless Steel Bezel
Dimensions	3.0" W x 2.0" H x 0.9" D	• Ideal for Cab & Sleepers Panels
Mounting	2 Hole Surface, 2-5/16" C to C	• Polycarbonate Lens & Housing
Connector	PL-10	• Solid State Circuit Board
Legal Heading	P2 P3	• 10 Year Warranty
DOT/SAE	J592, J2042	

5" CLEARANCE MARKER



PART NUMBER DESCRIPTION

M27340R	RED
M27340Y	AMBER

LEDs	12	• 5" Bus Clearance Marker
Voltage	12.8VDC	• 2 Hole Surface Mount
Amp Draw	80mA Red / 60mA Amber	• Moisture Proof Sealed Electronics
Dimensions	5.2" W x 2.1" H	• Polycarbonate Lens & Housing
Mounting	2 Hole Surface, 3-1/16" C to C	• 10 Year Warranty
Connector	2 Leads, .180 Bullet & Ring, 5"	
Legal Heading	P2 P3	
DOT/SAE	J592, J2042	

LED CLEARANCE MARKER

IMPROVED

2" X 6" COMBINATION CLEARANCE MARKER




PART NUMBER	DESCRIPTION
M20395R	RED
M20395Y	AMBER
LEDs	18
Voltage	12.8VDC
Amp Draw	200mA
Dimensions	5.9" W x 2.0" H x 1.9" D
Mounting	2 Hole Surface, 4-13/16" C to C
Connector	PL-10
Legal Heading	P2 P3 PC2
DOT/SAE	J592, J2042

- Combination Clearance Marker
- US Patent No. 7,273,306 B2
- Polycarbonate Lens & Housing
- 5 Year Warranty

IMPROVED

2" X 6" REFLECTORIZED AUXILIARY TURN/CLEARANCE MARKER

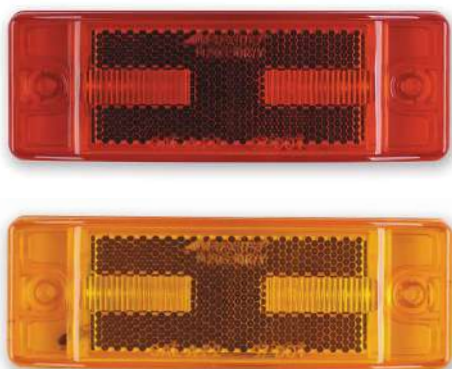

PART NUMBER	DESCRIPTION
M20330R	RED
M20330Y	AMBER
LEDs	8
Voltage	12.8VDC
Amp Draw	120mA/70mA
Dimensions	5.9" W x 2.1" H x 1.6" D
Mounting	2 Hole Surface, 4-13/16" C to C
Connector	3 Leads .180 Bullets, 6"
Legal Heading	A P2 P3 PC2
DOT/SAE	J592, J594, J2042

- Reflex Reflector Clearance Marker
- Auxiliary Turn
- Classic Reflector Lens Design
- High Impact Acrylic Lens & Polycarbonate Housing
- 5 Year Warranty

KENWORTH AND PETERBILT STYLE CLEARANCE MARKER




PART NUMBER	DESCRIPTION
M17210Y	AMBER – PETERBILT & KENWORTH
M17210YCL	AMBER CLEAR LENS – PETERBILT & KENWORTH
LEDs	9
Voltage	12.8VDC
Amp Draw	100mA
Dimensions	4.5" W x 1.6" H x 0.5" D (1.6" Overall Depth)
Mounting	2 Hole Surface, 3.23" C to C
Connector	Integrated OEM Connector
Legal Heading	P2 P3
DOT/SAE	J592, J2042

- Available in Amber, and Amber Clear Lens
- OE-Style Connector fits factory harness
- Acrylic Lens and ABS Housing
- Mounting Screws & Gasket Included
- 5 Year Warranty

**Kenworth and Peterbilt are registered trademarks of Paccar*

RECTANGLE CLEARANCE MARKER LIGHT & REFLEX REFLECTOR

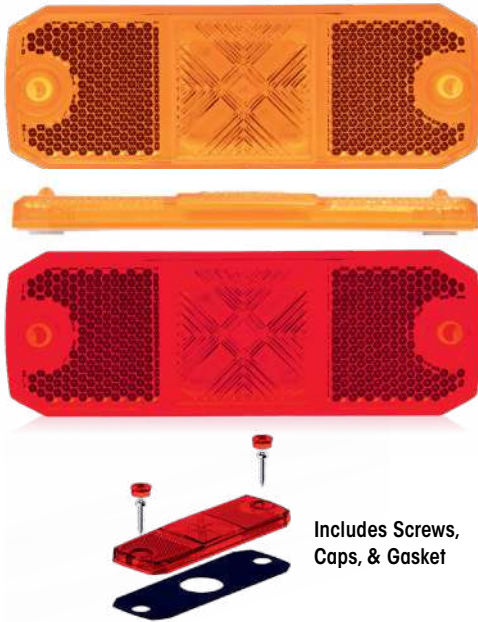

Includes Screws,
Caps, & Gasket

PART NUMBER	DESCRIPTION
M17100Y-DV	AMBER CLEARANCE MARKER / REFLECTOR
M17100YDV-X	AMBER CLEARANCE MARKER / REFLECTOR – BULK
M17100R-DV	RED CLEARANCE MARKER / REFLECTOR

LEDs	3
Voltage	12/24VDC
Amp Draw	35mA
Dimensions	4.68" L x 1.65" W x 0.39" D
Mounting	2 Hole Surface, 4" C to C
Connector	2 Leads Blunt Cut, 7"
Legal Heading	A P2 P3
DOT/SAE	J592, J594, J2042

- Clearance Marker & Reflector
- DOT/SAE Class A Reflex Reflector
- High Impact Acrylic Reflex Reflector Lens
- 12/24VDC Dual Voltage
- 5 Year Warranty

FREIGHTLINER* CAB MARKER & CLEARANCE MARKER LIGHT



26 LEDs provide a full look and illuminate the edges

Also available in Red or Red/Clear Lens

PART NUMBER	DESCRIPTION
M17200R	RED
M17200RCL	RED CLEAR LENS
M17200Y	AMBER
M17200YCL	AMBER CLEAR LENS

LEDs	26
Voltage	12.8VDC
Amp Draw	250mA (Amber) 100mA (Red)
Dimensions	5.75" L x 1.8" W x 1.1" D
Mounting	2 Hole Surface, 4.9" center to center
Connector	2 Leads Blunt Cut, 4"
Legal Heading	P2 P3 PC2
DOT/SAE	J592, J2042

- Freightliner* Cab Marker
- Available in Amber, Red, Amber Clear Lens, and Red Clear Lens
- Vertical or Horizontal Mount
- Polycarbonate Lens & Housing
- Includes Mounting Gasket
- 5 Year Warranty

* Freightliner is a registered trademark of Daimler Trucks N.A

LED CLEARANCE MARKER

NEW

CHROME CAB MARKER

5 YEAR WARRANTY



PART NUMBER DESCRIPTION

M17011Y AMBER

LEDs	17	• Chrome Cab Marker
Voltage	12.8VDC	• Popular Pete & KW Style
Amp Draw	140mA	• Acrylic Lens
Dimensions	10.6" L x 3.9" W x 2.8" H	• Chrome ABS Housing
Mounting	2 Hole Surface, 9-5/32" C to C	• Includes Gasket, Mounting Screws & O'Ring Seals
Connector	2 Leads Blunt Cut	• 5 Year Warranty
Legal Heading	P2 P3 PC2	
DOT/SAE	J592, J2042	

FLUSH MOUNT CAB LIGHT

10 YEAR WARRANTY



PART NUMBER DESCRIPTION

M20361Y AMBER


M20361RCL RED CLEAR LENS

LEDs	6	• Flush Mount Cab Marker
Voltage	12.8VDC	• Designed for Flush Mounting
Amp Draw	90mA	• High Impact Acrylic Lens & Housing
Dimensions	4.6" W x 2.3" H x 0.7" D	• Gasket & Connector Included
Mounting	2 Hole Surface, 3-5/8" C to C	• For Freightliner & Volvo*
Connector	PL-2 Included	• 10 Year Warranty
Legal Heading	P2 P3	
DOT/SAE	J592, J2042	

* Freightliner / Volvo are Registered Trademarks

TRIANGLE COMBINATION CAB MARKER

10 YEAR WARRANTY



PART NUMBER DESCRIPTION

M20311R RED

M20311Y AMBER

LEDs	15	• Triangle Combination Cab Marker
Voltage	12.8VDC	• Horizontal or Vertical Mount
Amp Draw	80mA	• Moisture Proof Sealed Electronics
Dimensions	3.3" W x 2.6" H x 1.7" D	• Polycarbonate Lens & Housing
Mounting	2 Hole Surface, 1-15/32" C to C	• 10 Year Warranty
Connector	2 Leads, .180 Bullet & Ring, 6"	
Legal Heading	P2 P3 PC2	
DOT/SAE	J592, J2042	



4" COMBINATION CLEARANCE MARKER



PART NUMBER	DESCRIPTION
M23015R-DV	RED
M23015Y-DV	AMBER

LEDs 14
Voltage 12/24VDC
Amp Draw 50mA 12V / 50mA 24V
Dimensions 4.0" W x 2.0" H x 1.0" D
Mounting 2 Hole Surface, 3" C to C
Connector 2 Leads, .180 Bullet & Ring, 6"
Legal Heading P2 P3 PC2
DOT/SAE J592, J2042

- 4" Combination Clearance Marker
- 12/24VDC Dual Voltage
- Polycarbonate Lens & Housing
- 5 Year Warranty

ADDITIONAL MODELS - SEE PG. 89

2" ROUND CLEARANCE MARKER



PART NUMBER	DESCRIPTION
M09100R-DV	RED
M09100Y-DV	AMBER

LEDs 9
Voltage 12/24VDC
Amp Draw 100mA 12V / 50mA 24V
Dimensions 2.0" Diam. x 0.7" Depth
Mounting Grommet
Connector PL-10
Legal Heading P2 P3
DOT/SAE J592, J2042

- 2" Round Clearance Marker
- 12/24VDC Dual Voltage
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 5 Year Warranty

2-1/2" ROUND CLEARANCE MARKER



PART NUMBER	DESCRIPTION
M11300R-DV	RED
M11300Y-DV	AMBER

LEDs 13
Voltage 12/24VDC
Amp Draw 70mA 12V / 40mA 24V
Dimensions 2.5" Diam. x 0.7" Depth
Mounting Grommet
Connector PL-10
Legal Heading P2 P3
DOT/SAE J592, J2042

- 12/24VDC Dual Voltage
- Sealed Moisture Proof Electronics
- Polycarbonate Lens & Housing
- Plated Brass Connector
- 5 Year Warranty

3/4" MINI COMBINATION DUAL VOLTAGE CLEARANCE MARKERS



PART NUMBER	DESCRIPTION
M09300R-DV	RED
M09300Y-DV	AMBER
M50112	STAINLESS STEEL BEZEL
M50125	WIDE CHANNEL GROMMET

LEDs 3
Voltage 12/24VDC
Amp Draw 30mA 12V / 30mA 24V
Dimensions 3/4" Diam. x 1" Depth
Mounting Grommet 3/4" Hole Cut Out
Connector 2 .180 Bullets, 7"
Legal Heading P2 P3 PC2
DOT/SAE J592, J2042

- 3/4" Low Profile Design
- 12/24VDC Dual Voltage
- Completely Sealed Electronics
- Standard Grommet Included
- Optional Stainless Steel Bezel
- 5 Year Warranty

SURFACE MOUNT ID BAR/CENTER HIGH MOUNT STOP LIGHT (CHMSL)



PART NUMBER	DESCRIPTION	
M63319R	RED	
LEDs	9	• Dual Function Operation
Voltage	12.8VDC	• Polycarbonate Lens & Housing
Amp Draw	150mA CHMSL 20mA ID Bar	• Sleek Low Profile Design
Dimensions	15.4" L x 1.2" W x 0.7" D	• Two Hole Surface Mount- Horizontal Only
Mounting	2 Hole Surface, 14-9/16" C to C	• 5 Year Warranty
Connector	3 Leads Blunt Cut, 14.5"	
Legal Heading	P2 P3 U3	
DOT/SAE	J592, J2042, J1957	

STAINLESS STEEL ID BAR



PART NUMBER	DESCRIPTION	
M20323R	RED	
LEDs	24 (8 per light)	• Stainless Steel ID Bar
Voltage	12.8VDC	• Three M20320R Lights
Amp Draw	120mA	• 2 Hole Surface Mount
Dimensions	16.3" W x 1.4" H	• Polished Stainless Steel
Mounting	2 Hole Surface, 15-7/8" C to C	• 1 Year Warranty For Stainless Steel Bar
Connector	2 Leads Blunt Cut, 12"	• 10 Year Warranty For Lamps
Legal Heading	P2 P3	
DOT/SAE	J592, J2042	

ALUMINUM ID BAR



PART NUMBER	DESCRIPTION	
M20343R	RED	
M20343Y	AMBER - DISCONTINUED	
LEDs	21 (7 per light)	• Aluminum ID Bar
Voltage	12.8VDC	• Three M20340-Series Lights
Amp Draw	120mA	• 2 Hole Surface Mount
Dimensions	17.1" W x 1.0" H	• 1 Year Warranty For Aluminum Bar
Mounting	2 Hole Surface, 16-1/2" C to C	• 10 Year Warranty For Lamps
Connector	2 Leads Blunt Cut, 12"	
Legal Heading	P2 P3	
DOT/SAE	J592, J2042	

1-1/4" ROUND ID BAR



PART NUMBER	DESCRIPTION
M09410R-RM3	RED

LEDs	18 (6 per light)	• (3) M09410R Mounted in Aluminum Bar
Voltage	12.8VDC	• Sealed Moisture Proof Electronics
Amp Draw	240mA	• Polycarbonate Lens
Dimensions	16.25" L x 2.13" W x 1.18" D	• 1 Year Warranty For Aluminum Bar
Mounting	2 Hole Surface, 15.67" C to C	• 5 Year Warranty
Connector	2 Leads, 1 Blunt, 1 Ring, 10"	
Legal Heading	P2 P3 PC2	
DOT/SAE	J592, J2042	


2-1/2" ROUND STAINLESS STEEL ID BAR



PART NUMBER	DESCRIPTION
M11303R	RED

LEDs	39 (13 per light)	• 2-1/2" Round Stainless Steel ID Bar
Voltage	12.8VDC	• Three M11300R Lights
Amp Draw	210mA	• 2 Hole Surface Mount
Dimensions	14.4" W x 1.6" H x 1.5" D	• Polished Stainless Steel
Mounting	2 Hole Surface, 8-3/8" C to C	• 1 Year Warranty For Stainless Steel Bar
Connector	2 Leads .180 Bullets	• 10 Year Warranty For Lamps
Legal Heading	P2 P3	
DOT/SAE	J592, J2042	

M09300R-3 3/4" ROUND ID MARKER LIGHT KIT

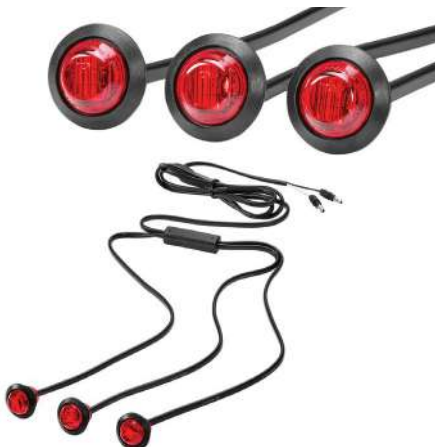

PART NUMBER	DESCRIPTION
M09300R-3	RED

LEDs	9 (3 per light)	• 3/4" Mini Round CM
Voltage	12.8VDC	• Space Saving Design
Amp Draw	160mA	• Polycarbonate Lens/Housing
Dimensions	3/4" Diam.	• Grommet Included
Mounting	Grommet—3/4" Cutout	• Sealed Moisture Proof Electronics
Connector	2 Leads .180 Bullets, 56"	• Optional Stainless Steel Bezel
Legal Heading	P2 P3 PC2	• 5 Year Warranty
DOT/SAE	J592, J2042	

ACCESSORIES

- ELECTRICAL CONNECTORS AND FLASHERS
- MOUNTING ACCESSORIES
- RETAIL DISPLAYS
- *MaxximaStyle* 120V AC-POWERED LIGHTS
- DOT LIGHTING CODES



ACCESSORIES

CONNECTORS

M50900

3-PIN PL-3 RIGHT ANGLE



- PL-3 Right Angle Pigtail Connector
- 3 Wires, (2) Blunt Cut, (1) Ring 12" Long

M50900-X

3-PIN PL-3 RIGHT ANGLE 50 PIECE BUNDLE



- PL-3 Right Angle – Bulk Pack
- 3 Wires, (2) Blunt Cut, (1) Ring 12" Long

M50933

3-PIN PL-3 RIGHT ANGLE TO .180 BULLETS



- PL-3 Right Angle to 0.180" Male Bullet
- 3 Wires, 12" Long

M50911

3-PIN PL-3 STRAIGHT



- PL-3 Straight
- 3 Wires Blunt Cut, 10" Long

M50911-X

3-PIN PL-3 STRAIGHT – BULK PACK



- PL-3 Straight – Bulk Pack
- 3 Wires Blunt Cut, 10" Long

M50901

3-PIN PL-3 EXTENSION HARNESS



- PL-3 Male Right Angle to PL-3 Female
- 3 Wires, 4" Long

M50908

3-PIN DryFit CONNECTOR



- 3-Pin DryFit Connector
- 3 Wires, (2) Blunt Cut, (1) Ring 10" Long

M50903

3-PIN PL-3 TO MALE DryFit ADAPTER



- PL-3 Right Angle to DryFit
- 3 Wires, 4" Long

M50904


3-PIN PL-3 TO MALE GROTE ADAPTER



- PL-3 Right Angle to Grote Male Pin
- 3 Wires, 3-1/4" Long

M50700-X


DUAL 3-PIN PL-3 72" HARNESS – BULK PACK

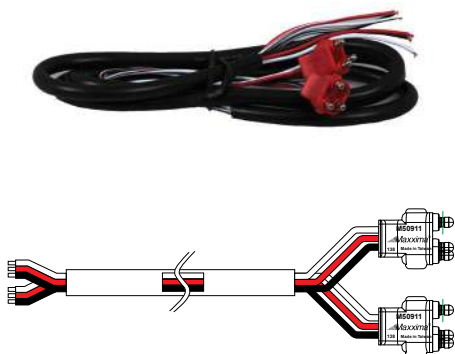

- Two (2) PL-3 Right Angle
- 6 Jacketed Wires Blunt Cut, 72" Long

M50932

3-PIN PL-3 SPLITTER ADAPTER

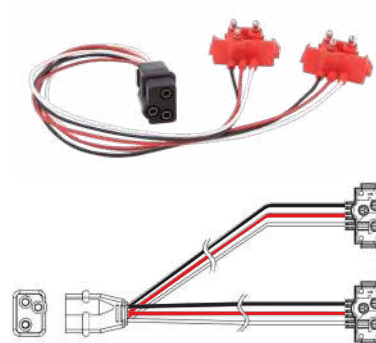

- Two (2) PL-3 Male to PL-3 Female B3
- 6 Wires, 12" Long

CONNECTORS

M50916 3-PIN DELPHI CONNECTOR FOR M63123Y  • OE-Style Delphi Connector for M63123Y • 3 Wires Blunt Cut, 6" Long	M50930 5-PIN METRI-PACK CONNECTOR  • OE-Style Connector for M42222, M42223L • 4 Jacketed Wires, 7" Long	M50931 2-WIRE DEUTSCH-STYLE DT-06  • DT06-2S Mates with DT04-2P • 2 Jacketed Wires, 4.5" Long
M50950 2-PIN PL-10 RIGHT ANGLE  • PL-10 Right Angle Pigtail Connector • 2 Wires, (1) Blunt Cut, (1) Ring, 6" Long	M50950-X 2-PIN PL-10 RIGHT ANGLE 50 PIECE BUNDLE  • PL-10 Right Angle – Bulk Pack • 2 Wires, (1) Blunt Cut, (1) Ring, 6" Long	M50950-X18 2-PIN PL-10 – 18 INCH – BULK PACK  • PL-10 Right Angle Pigtail Connector • 2 Wires, (1) Blunt Cut, (1) Ring, 18" Long
M50951 2-PIN PL-10 RIGHT ANGLE - .180 BULLETS  • PL-10 Right Angle Pigtail Connector • 2 Wires, .180 Bullets, 6" Long	M50953 2-PIN DryFit CONNECTOR  • 2-Pin DryFit Connector • 2 Wires, Blunt Cut, 5" Long	M50905 3-PIN LOAD EQUALIZER  • Inline Load Resistor • PL-3 Male to PL-3 Female • 3 Wires, 15" Long

CONTINUOUS WIRE HARNESS ROLLS

	M50900-100	3-PIN	12" LEADS	100 CONNECTORS PER ROLL
	M50950A-100	2-PIN	12" LEADS	100 CONNECTORS PER ROLL
	M50950A-200	2-PIN	6" LEADS	200 CONNECTORS PER ROLL
	M50950-5026	2-PIN	26" LEADS	50 CONNECTORS PER ROLL
	M50960-50	TWIN FEMALE BULLET	12" LEADS	50 CONNECTORS PER ROLL
	M50960-100	TWIN FEMALE BULLET	12" LEADS	100 CONNECTORS PER ROLL
	M50960-5024	TWIN FEMALE BULLET	24" LEADS	50 CONNECTORS PER ROLL

CONTROL MODULES

M50956
REMOTE ON/OFF INLINE LIGHT CONTROLLER



- Use First Light in Series to Turn On/Off Other Lights in the Series

M50909
24V TO 12V STEP DOWN MODULES 1 AMP



- 24V input, 12V output, 1 Amp
- 4 Leads, Blunt Cut, 3"

M50913
24V TO 12V STEP DOWN MODULES 2 AMP



- 24V input, 12V output, 2 Amp
- 4 Leads, Blunt Cut, 3"


PROGRAMMABLE FLASHER



PART NUMBER	DESCRIPTION
M50910	PROGRAMMABLE LED FLASHER
Voltage	12.8VDC
Amp Draw	20A Max
Dimensions	3.2" W x 1.9" H x 0.6" D
Connector	7 Leads, Blunt Cut, 11"

- 16 Flash Patterns
- 20 Amp Heavy Duty Flasher
- 2 Outputs, 10 Amps each
- Simultaneous or Alternate Wig-Wag Flash

SMART AUTO-SENSE LED LOAD EQUALIZER

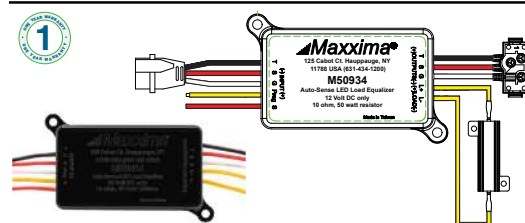

PART NUMBER	DESCRIPTION
M50934	3-PIN SMART AUTO-SENSE LED LOAD EQUALIZER
Voltage	12.8VDC
Dimensions	3.2" W x 1.9" H x 0.6"
Resistor Only:	3.1" L x 1.2" W x 0.6" D with 6" Lead
Connector	3-pin PL-3 Male to 3-pin PL-3 Female, 13" Overall Length
Resistance	10 ohm, 50 watt resistor

* For compliance with Lamp-Out Hyperflash

* Programmable Stop/Turn Current Threshold


HEADLIGHT LOAD RESISTOR FOR LED HEADLIGHTS



Designed for applications where LED headlight low beam amp draw is too small.

PART NUMBER	DESCRIPTION
M50914	LOAD RESISTOR FOR 4" X 6" HEADLIGHTS
M50915	LOAD RESISTOR FOR 5" X 7" & 7" ROUND HEADLIGHTS
Voltage	12.8VDC
Dimensions	
Resistor Only:	3.1" L x 1.2" W x 0.6" D with 35" Lead
Connector	3-pin H4 Male to 3-pin H4 Female, 12"
Resistance	10 ohm, 50 watt resistor

DRL RETROFIT DRIVER MODULES

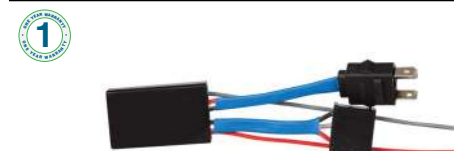

For use with VHL-4X6DRL, VHL-5X7DRL, VHL-07DRL, and MHLE-4X6DRL

* Meets optional US FMVSS DRL requirements and mandatory Canadian CMVSS Safety Regulations MSVR 108 (44) to (65) DRL requirements.

PART NUMBER	DESCRIPTION
M50917	4X6 RETROFIT DRL DRIVER MODULE
M50918	5X7 & 7" RETROFIT DRL DRIVER MODULE
Voltage	12/24VDC Dual Voltage
Amp Draw	5mA Standby
Dimensions	2.2" W x 1.5" H x 0.5" D, 11"
Connector	H4 3 Blade Male and Female 2 Leads 11"
Amp Output	4A Maximum
PWM Output	150 HZ, 80% Duty Cycle

- Designed to retrofit vehicles that did not come factory equipped with Daytime Running Lights (DRL).
- Optional Auto-Off turns DRL off while signaling turns.
- Requires one (1) Module on each side of the vehicle.

BLACK VINYL GROMMETS



CHROME PLASTIC GROMMET COVERS



SECURITY FLANGES - BRUSH GUARDS - BEZELS



HDI-DISP-18
HEAD LIGHT DISPLAY



MHLE-SERIES HEAD LAMP DISPLAY

Black Chrome display includes 110VAC power supply, lighted Maxxima Logo, On/Off switch, selector buttons for each light and high/low beam functions.

DIMENSIONS 20" x 20" x 8.5"

HDI-DISP-13
7" HEADLIGHT DISPLAY



7" HEAD LAMP DISPLAY

Chrome display includes 110VAC power supply, lighted Maxxima Logo, On/Off switch, selector button for high/low beam functions.

DIMENSIONS 12.5" x 11" x 8.5"

HDI-DISP-17

MaxxHeat



MaxxHeat HEATED DISPLAY

Includes 110VAC power supply, On/Off switch, and push buttons for each light.

Interactive Heated Display
4" Heated Stop Light
4" x 6" Heated Headlight

DIMENSIONS 11.8" x 15.4" x 4.0"

HDI-DISP-20
FULL LINE DISPLAY



DIMENSIONS 22" x 22"

HDI-DISP-9
MLS DISPLAY



DIMENSIONS 21.7" x 12.6"

HDI-DISP-11
WORK LIGHT DISPLAY



SHOWN WITH OPTIONAL WORK LIGHTS

Display includes 110VAC power supply and slots to mount 9 work lights. Features nine light selector buttons to activate one light at a time and a Blue illuminated Maxxima Logo. Increase sales with this interactive display.

DIMENSIONS 22" x 29"

RETAIL DISPLAYS

HDI-DISP-16
INTERIOR DOME LIGHT DISPLAY



DIMENSIONS 22" x 22"

HDI-DISP-8
WARNING LIGHT DISPLAY




DIMENSIONS 18.5" x 12"

HDI-DISP-15
SUB DEALER DISPLAY



DIMENSIONS 17.5" x 22.7"

MRD-1
COUNTER TOP DISPLAY

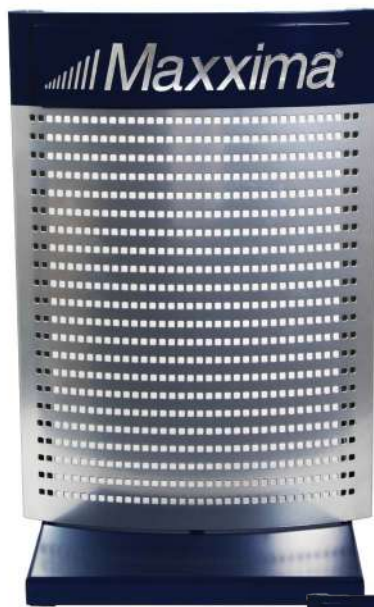

- Counter Top Display
- Ships with Hooks
- Does Not Include Product
- Great for Add-On Sales

Shown with Optional Product

DIMENSIONS 14" W X 18" H X 8" D

MRD-2
FLOOR DISPLAY



- Floor Display
- Ships with Hooks & Shelf
- Does Not Include Product
- Great for Point of Purchase

Shown with Optional Product


DIMENSIONS 22" W X 60" H X 16" D

LED FLASHLIGHTS

NEW

MF-49-KIT RECHARGEABLE LED FLASHLIGHT KIT

2 YEAR WARRANTY

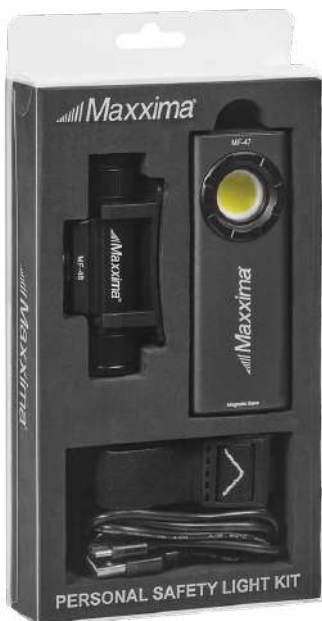

Maxxima Personal Safety Light Kit



MF-47 Includes Dimming Feature



MF-48 Includes Strobe Mode

Lumens

- Flashlight 1,350 / 500 / 80
- Headband 450

Dimensions

- Flashlight 1.8" W x 4.5" H x 1.0" D
- Headband 3.5" W x 1.0" H x 1.4" D

Power

- Flashlight Rechargeable, Non-Removable Battery
- Headband Rechargeable 18650

Mounting

Mag Bottom, Mag Back, or Rear Clip

- Kit Includes 2 Flashlights (MF-47 Flashlight and MF-48 Headband Flashlight)
- MF-47 Multifunction: 1,350 Lm HI / 500 Lm MED / 80 Lm LO
- MF-47 Top LED 80 Lumens
- MF-48 Multifunction: HI / MED / LO + 2 SIDE RED LEDs
- USB-C Cable Included
- 2 Year Warranty

NEW

MF-46 RECHARGEABLE LED FLASHLIGHT

2 YEAR WARRANTY



Lumens

600 / 120 / 175

Dimensions

1.2" W x 3.8" H x 0.8" D

Power

Rechargeable, Non-Removable Battery
Mag Bottom, Mag Back, or Rear Clip

Mounting

- Multi-Function Flashlight
- Primary COB LED: 600 Lm HI / 120 Lm LO
- Top LED Spotlight 175 Lm
- USB-C Cable Included
- 3Hr Charge / 9 Hr Run Time
- 2 Year Warranty

MF-27 LED FLASHLIGHT

1 YEAR WARRANTY



Lumens

70

Dimensions

1.8" W x 5.8" H x 1.8" D

Power

2 AA Batteries
(Not Included)

- 165 Foot Range
- Waterproof IP44 Rated
- Lasts up to 24 Hours Continuous On
- 1 Year Warranty

MF-28 LED LANTERN

1 YEAR WARRANTY



Lumens

250

Dimensions

3.2" W x 5.1" H x 1.8" D
(7.4" H Handle Extended)

Power

3 AA Batteries
(Not Included)

- 100 Foot Range
- 360° Beam Angle
- Magnetic Mount or Hook Mount
- Waterproof IP44 Rated
- Lasts up to 24 Hours Continuous On
- 1 Year Warranty

PROMOTIONAL ITEMS

MAXXIMA DUFFLE BAG

MB-91



MAXXIMA WHEELED BAG

MB-95



BASE BALL CAPS

MCAP-BLACK



MAX-TAG
RE-ORDER TAGS



MAXXIMA DISPLAY BANNER

24" x 48"



LEARN MORE AT
www.maxxima.com

FIND THE MOST UP-TO-DATE
PRODUCTS AND SPECIFICATIONS



HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

UNDER CABINET LIGHT, 16.5 FT COB LED STRIP LIGHT SPOOL — 120VAC



PART NUMBER	DESCRIPTION
MLR-301650D	LED UNDER CABINET LIGHT

- Dimensions** 16.5'L x 0.3"W
- Voltage** 120VAC
- Watts** 30W
- Lumens** 500 lm / meter
- Includes Power Supply and Option for Plug-In or Hardwired
- 3,000K Warm White, Dimmable
- Can be cut in 2" intervals
- Backed with self-adhesive 3M tape
- Has 1,640 LEDs
- 500 lumens / meter - 2,500 lumens for 16.5 ft Roll (lumens will vary based on length of strip)
- 3 Year Warranty

2-FOOT LED SHOP LIGHT — 120VAC



PART NUMBER	DESCRIPTION
MSL-202500C	CLEAR LENS, 2,500 LUMEN
MSL-202000F	FROSTED LENS, 2,000 LUMEN

- Dimensions** 23.8" L x 5.1" W x 1.8" D
- Ratings** 120VAC, 20W, ETL Listed Safety Certification
- Aluminum and polycarbonate housing
- Plug & play with 5' power cord
- Link up to 4 together with built in cord and plug
- Chain mounting kit included
- 3 Year Warranty



Linkable up to 4 units

4-FOOT MOTION LED SHOP LIGHT, CLEAR LENS, 4,600 LUMEN — 120VAC



PART NUMBER	DESCRIPTION
MSL-404600SC	MOTION SENSOR

Dimensions 47.5" L x 5.1" W x 1.8" D
Ratings 120VAC, 40W, ETL Listed Safety Certification

- PIR Motion Sensor for Automatic On & Off
- 10-minute on time once activated
- Motion detection up to 10 feet away
- 4,600 Lumen Clear polycarbonate lens
- Aluminum and polycarbonate housing
- Plug & play with 5' power cord
- Link up to 4 together with built in cord and plug
- Chain mounting kit included
- Recommended Installation Height: 9.2 ft – 11.5 ft
- 5 Year Warranty

4-FOOT LED SHOP LIGHT, CLEAR LENS, 4,800 LUMEN — 120VAC



PART NUMBER	DESCRIPTION
MSL-404800C	CLEAR LENS

Dimensions 47.5" L x 5.1" W x 1.8" D
Ratings 120VAC, 40W, ETL Listed Safety Certification

- 4,800 Lumen Clear polycarbonate lens
- Aluminum and polycarbonate housing
- Plug & play with 5' power cord
- Link to 4 together with built in cord and plug
- 12" on/off pull chain
- Chain for hanging fixture (20-0.8" links provided for 13.5" overall length, 2mm thickness)
- Chain mounting kit included
- 5 Year Warranty

4-FOOT LED SHOP LIGHT, FROSTED LENS, 4,400 LUMEN — 120VAC



PART NUMBER	DESCRIPTION
MSL-404400F	FROSTED LENS

Dimensions 47.5" L x 5.1" W x 1.8" D
Ratings 120VAC, 40W, ETL Listed Safety Certification

- 4,400 Lumen Frosted polycarbonate lens
- Aluminum and polycarbonate housing
- Plug & play with 5' power cord
- Link up to 4 together with built in cord and plug
- 12" on/off pull chain
- Chain mounting kit included
- 5 Year Warranty

MPWL-SERIES PORTABLE WORK LIGHT — 120VAC



These heavy-duty portable LED work light emit bright light in a 360-degree pattern for full coverage of your work area.



MPWL-60L



MPWL-100L



MPWL-150L

PART NUMBER	MPWL-60L	MPWL-100L	MPWL-150L	
WATTS	60	100	150	• Plugs into any standard AC outlet with 9 ft power cord
Lumens	7,200	12,000	18,000	• Link multiple units together, and a door to block off the linking port when not in use
Height	10.9"	11.3"	12.7"	• Operating Temperature: -30 °C to +55 °C
Diameter	6.8"	6.8"	6.8"	• IP65 Rated for outdoor water resistant use
Weight	5.28 lbs	6.6 lbs	7.7 lbs	• UL Listed, cUL Listed
Voltage	120VAC	120VAC	120VAC	• 3 Year Warranty
	Linkable up to 10 units	Linkable up to 7 units	Linkable up to 5 units	

50 FT HEAVY DUTY LED CONSTRUCTION STRING LIGHT, LINKABLE — 120VAC

PART NUMBER	MPWL-S40L	MPWL-S100L	
WATTS	40	100	• Compact bright, yellow body with a metal cage protecting the lens, and bright yellow cord, provide ideal safety and visibility
Lumens	5,000	12,000	• Included hooks make it easy to hang
Height	3.15"	7.3"	• 50-ft long, 10 feet between fixtures
Diameter	4.7"	4.7"	• Heavy Duty Metal Cage & Frosted Lens
Weight	5 lbs	9 lbs	• IP65 Rated
Voltage	120VAC	120VAC	• 3 Year Warranty



MPWL-S40L

- 5 Fixture, 1,000 Lumens per fixture
- 5,000 Total Lumen output
- Linkable up to 10 strings



MPWL-S100L

- 5 Fixture, 2,400 Lumens per fixture
- 12,000 Total Lumen output
- Linkable up to 14 strings

LIGHTING ID CODES

The following chart "Lighting ID Codes" shows the DOT lighting code required to be visible on the light in accordance with SAE Standards.

LIGHTING ID CODES:	
A	Reflex reflector
A2	Reflex reflector for use on vehicles 2032mm or more in overall width
A3	Reflex reflector for conspicuity treatments (CT), for use on vehicles 2032 mm or more in overall width
A4	Reflex reflector for CT (vehicles > 2032mm in width) - 50mm wide [truck/trailer]
A5	Reflex reflector for CT (vehicles > 2032mm in width) - 75mm wide [truck/trailer]
A6	Reflex reflector for CT (vehicles > 2032mm in width) - 100mm wide [truck/trailer]
A7	Reflex reflector for CT (vehicles > 2032mm in width) - 25mm wide [truck/trailer]
C	Motorcycle auxiliary front lamp
D	Motorcycle and moto-driven cycle turn signal lamp
DL	Distributed lighting system (headlamp)
DRL	Daytime running lamp not optically combined with a headlamp low or high beam
E	Side turn signal lamp - vehicles 12m or more in length
E2	Side turn signal lamp - vehicles less than 12m in length
E3	Rear facing side turn signal lamp
E4	Side facing side turn signal lamp
E5	Side direction indicator lamp
EVS1	Siren - interior location
EVS2	Siren -exterior location
EVS3	Siren -under hood location
F	Front fog lamp
F2	Fog tail lamps
F3	Harmonized front fog lamp
G	Truck cargo lamp
H	Sealed beam headlamp
HC	Headlamp center
HG	Discharge forward lighting (headlamp)
HH	Sealed beam headlamp housing
HR	Replaceable bulb headlamp
HL	Light Emitting Diode (LED) headlamp
I	Turn signal lamp spaced greater than 100mm from headlamp
I3	Turn signal lamp spaced from 75mm to less than 100mm from headlamp
I4	Turn signal lamp spaced from 60mm to less than 75mm from headlamp
I5	Turn signal lamp spaced less than 60mm from headlamp
I6	Rear mounted turn signal lamp and front mounted turn signal lamps mounted 100mm or more from the headlamp, for use on vehicles 2032mm or more overall width
I7	Front mounted turn signal lamp mounted less than 100mm from the headlamp, for use on vehicles 2032mm or more in overall width
J1690	Flasher
K	Front cornering lamp
K2	Rear cornering lamp

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

LIGHTING ID CODES (CONTINUED)

L	License plate lamp
M	Motorcycle and motor-driven cycle headlamp - motorcycle type
N	Motorcycle and motor-driven cycle headlamp - moto-driven cycle type
O	Spot lamp
P	Parking lamp
P2	Sidemarkers for use on vehicles 2032mm or less in overall width
P3	Clearance, sidemarkers and identification lamp for use on vehicles 2032mm or more in overall width
PC2	Combination clearance and sidemarkers lamp for use on vehicles 2032mm in width or more in overall width
Q	Turn signal operating unit - Class A
QB	Turn signal operating unit - Class B
QC	Vehicular hazard warning signal operating unit
QD1	Turn signal operating unit for use vehicles 2032mm in width or more in overall width - Type 1
QD2	Turn signal operating unit for use vehicles 2032mm in width or more in overall width - Type 2
QE1	Hazard warning operating unit for use on vehicles 2032mm in width or more in overall width - Type 1
QE2	Hazard warning operating unit for use on vehicles 2032mm in width or more in overall width - Type 2
R	Reversing (back-up) lamp
S	Stop lamp
S2	Stop lamp for use on vehicles 2032mm or more in overall width
T	Tail lamp (rear position lamp)
T2	Tail lamp (rear position lamp) for use on vehicles 2032mm or more in overall width
U	Supplemental high-mounted stop and turn signal lamp
U2	High-mounted stop lamp for use on vehicles 2032mm or more in overall width
U3	Center high-mounted stop lamp for passenger cars, light trucks and MPV's
W	Warning lamp for emergency, maintenance and service vehicles
W-1	Directional warning device - Class 1
W-2	Directional warning device - Class 2
W-3	Directional warning device - Class 3
W2	Warning lamp for school buses
W3-1	Optical warning device - Class 1
W3-2	Optical warning device - Class 2
W3-3	Optical warning device - Class 3
W4	Emergency warning device [triangular shape]
WS3-1	Selective coverage warning device - Class 1S
WS3-2	Selective coverage warning device - Class 2S
WS3-3	Selective coverage warning device - Class 3S
W6	School bus stop arm lamp
X	Adaptive [forward] lighting system
Y	Auxiliary high beam lamp
Z	Auxiliary low beam lamp

PART NUMBER PAGE REFERENCE

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

PART NUMBER	PAGE
HDI-DISP-8	111
HDI-DISP-9	110
HDI-DISP-11	110
HDI-DISP-13	110
HDI-DISP-15	111
HDI-DISP-16	111
HDI-DISP-17	110
HDI-DISP-18	110
HDI-DISP-20	110
LCL-3BL	45
LCL-3CL	45
LCL-3R	45
LED-300R	45
M09100ABS	93
M09100R	93
M09100RCL	93
M09100R-DV	101
M09100Y	93
M09100Y-DV	101
M09100YCL	93
M09105R	93
M09105Y	93
M09300BCL	44
M09300G	44
M09300R	91
M09300R-X	91
M09300R-XBC	91
M09300R-3	103
M09300RAS	74
M09300RAS-XBC	74
M09300RCL	91
M09300RCL-X	91
M09300R-DV	101
M09300WCL	44
M09300Y	91
M09300Y-X	91
M09300Y-XBC	91
M09300YAT	74
M09300YAT-XBC	74
M09300YCL	91
M09300YCL-X	91
M09300Y-DV	101
M09330R-X	90
M09330R-XBC	90
M09330WCL-X	44
M09330Y-X	90

PART NUMBER	PAGE
M09330Y-XBC	90
M09340RBL-DC	91
M09340RG-DC	91
M09340RP-DC	91
M09340RW-DC	91
M09340YBL-DC	91
M09340YG-DC	91
M09340YP-DC	91
M09340YR-DC	91
M09340YW-DC	91
M09360BCL	45
M09360WCL	45
M09370WCL	60
M09370Y	60
M09370YCL	60
M09400BCL	44
M09400G	44
M09400R	92
M09400RCL	92
M09400WCL	44
M09400Y	92
M09400Y-X	92
M09400YCL	92
M09400Y-XBC	92
M09410R	92
M09410R-X	92
M09410RAS-X	74
M09410R-RM3	103
M09410WCL	44
M09410Y	92
M09410Y-X	92
M09411R-X	92
M09411Y-X	92
M09450RCL-DC	59, 90
M09450RWCL-DC	59, 90
M09450RYCL-DC	59, 90
M09450YCL-DC	59, 90
M09450YWCL-DC	59, 90
M11201R	93
M11201Y	93
M11256R	94
M11256Y	94
M11260R-X	94
M11260Y-X	94
M11300R	94
M11300RCL	94

PART NUMBER	PAGE
M11300R-DV	101
M11300WCL-A	43
M11300Y	94
M11300YAT	74
M11300YCL	94
M11300Y-DV	101
M11303R	103
M16280ABS	94
M16280R	94
M16280RCL	94
M16280Y	94
M16280YCL	94
M17011Y	100
M17100R-DV	99
M17100Y-DV	99
M17100YDV-X	99
M17200R	99
M17200RCL	99
M17200Y	99
M17200YCL	99
M17210Y	98
M17210YCL	98
M17300RWCL-DC	89
M17300YWCL-DC	89
M20311R	100
M20311Y	100
M20320R	95
M20320Y	95
M20320YCL	95
M20323R	102
M20325	95
M20326	95
M20327	95
M20328	95
M20330R	98
M20330Y	98
M20332R	96
M20332R-BLK	96
M20332RCL	96
M20332Y	96
M20332Y-BLK	96
M20332YCL	96
M20340R	95
M20340Y	95
M20341R	95
M20341RCL	95

PART NUMBER	PAGE
M20341WCL	43
M20341Y	95
M20341YCL	95
M20342R-JX	95
M20342Y-JX	95
M20343R	102
M20343Y	102
M20350R	95
M20350RCL	95
M20350RY	95
M20350Y	95
M20350YCL	95
M20355	95
M20356	95
M20357	95
M20358	95
M20361RCL	100
M20361Y	100
M20381BCL	59
M20381WCL	59
M20382WYCL-DC	59
M20383RCL	56
M20383WCL	56
M20383YCL	56
M20383YCL-X	56
M20384BRCL	56
M20384BWCL	56
M20384GYCL	56
M20384RCL	56
M20384RWCL	56
M20384WCL	56
M20384WYCL	56
M20384YCL	56
M20384YCL-X	56
M20388YCL	57
M20389BRCL-DC	54
M20389BYCL-DC	54
M20389GWCL-DC	54
M20389GYCL-DC	54
M20389RWCL-DC	54
M20389YCL	54
M20389YWCL	54
M20389YWCL-DC	54
M20395R	98
M20395Y	98
M20400Y	52

PART NUMBER PAGE REFERENCE

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

PART NUMBER	PAGE
M20401Y	52
M20484BCL	55
M20484BRCL	55
M20484BYCL-DC	55
M20484GWCL-DC	55
M20484GYCL	55
M20484GYCL-DC	55
M20484RCL	55
M20484RWCL	55
M20484RWCL-DC	55
M20484RYCL-DC	55
M20484WCL	55
M20484YCL	55
M20484YWCL	55
M20484YWCL-DC	55
M20486YCL	50
M20486YWCL	50
M20487YCL	51
M20487YWCL	51
M20488GYCL-DC	51
M20488YCL	51
M20488YWCL	51
M20489YSL	50
M20494YGW-TC	53
M20494RGY-TC	53
M20494RYW-TC	53
M20494RWB-TC	53
M20494BYW-TC	53
M20494RBYW-QC	53
M20494RGYW-QC	53
M20495YCL	53
M23015R	96
M23015R-X	96
M23015RCL	96
M23015R-DV	101
M23015Y	96
M23015Y-X	96
M23015YCL	96
M23015Y-DV	101
M23025RB-DC	89
M23025RW-DC	89
M23025RW-DCDV	89
M23025YB-DC	89
M23025YW-DC	89
M23025YW-DCDV	89
M25100L	78

PART NUMBER	PAGE
M25100L-X	78
M25102LBLK-X	78
M25102LCH-X	78
M25200L	79
M25200L-X	79
M25201L	79
M25201L-X	79
M25202L-X	79
M25210L-X	79
M25220L	80
M25301L	80
M25301L-X	80
M25302L	80
M25302L-X	80
M25930L	80
M27340R	97
M27340Y	97
M30332R	96
M30332Y	96
M34260R	93
M34260RCL	93
M34260Y	93
M34260YCL	93
M36180R	97
M36180RCL	97
M36180Y	97
M36180YCL	97
M42100R	68
M42206	43, 77
M42206-X	43
M42206-ADHESIVE	43, 71, 77, 86
M42206R	71
M42206RDF-X	71
M42206Y	86
M42213-A	77
M42213R-A	71
M42213RCL-A	71
M42213Y-A	86
M42213YCL-A	86
M42214	77
M42220	72
M42221	72
M42222	72
M42223L	72
M42226-KIT	73

PART NUMBER	PAGE
M42320R	68
M42321-A	75
M42321R	67
M42321Y	83
M42322R	67
M42322R-X	67
M42322RCL	67
M42322RCLDF	67
M42322RDF	67
M42322RDF-X	67
M42322R-DV	82
M42322R-DVDF	67, 82
M42323R-A	67
M42324-A	75
M42324-AX	75
M42324-ADF	75
M42324-ADFX	75
M42324-ADV	82
M42339Y	83
M42339YDF	83
M42341R/Y	87
M42341RYCL	87
M42341Y/Y	87
M42344R	67
M42344R-X	67
M42346R	66, 67
M42346R-X	67
M42346RBU-KIT	66
M42347	75
M42348	75
M42354R-X	68
M42354-X	75
M42354Y-X	83
M42356-X	75
M42358RDF-MH	66
M42358R-MH	66
M42360R/Y-A	87
M42361R/Y-A	87
M42362R/Y-A	87
M42362RYCL-A	87
M42363R/Y-A	87
M42363RYCL-A	87
M42364Y/Y	87
M42701BCL	58
M42701R	58
M42701Y	58

PART NUMBER	PAGE
M42701YCL-A	58
M42705Y	49
M42710Y	49
M42720Y	49
M42730Y	48
M42740Y	48
M42741Y	48
M43253	109
M43253CH	109
M43900	108
M49700	108
M49702	109
M49705	108
M50100-B	108
M50100-X	108
M50102-X	108
M50103	109
M50105	108
M50112	44, 74, 90, 91, 109
M50112-X	109
M50115	55, 56
M50116	56
M50118	44, 59, 74, 90, 92, 109
M50118-X	109
M50121-A	54
M50124	29
M50125	44, 90, 91, 108
M50126	29
M50132	44, 92, 108
M50133	44, 108
M50135	33, 109
M50136	31, 109
M50137	56
M50138	56
M50140	27
M50141	56
M50142	56
M50143	56
M50144	56
M50146	57, 65, 69, 76, 109

PART NUMBER PAGE REFERENCE

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

PART NUMBER	PAGE
M50147	54
M50149	55
M50153CH	109
M50250	80
M50300-B	108
M50300-X	108
M50303	109
M50305	108
M50310	109
M50311	109
M50313CH	109
M50400-B	108
M50400-X	108
M50405	108
M50412	20
M50600-B	108
M50600-X	108
M50605	108
M50606-X	108
M50607	57, 65, 69, 76, 84, 108
M50700-X	105
M50900	63, 105
M50900-X	105
M50900-100	106
M50901	105
M50903	105
M50904	105
M50905	106
M50908	105
M50909	82, 107
M50910	60, 107
M50911	105
M50911-X	105
M50913	82, 107
M50914	107
M50915	107
M50916	85, 106
M50917	107
M50918	107
M50919	17
M50920	52
M50930	106
M50931	106
M50932	105
M50933	105

PART NUMBER	PAGE
M50934	107
M50950	106
M50950-X	106
M50950-X18	106
M50950A-100	106
M50950A-200	106
M50950-5026	106
M50951	106
M50953	106
M50956	107
M50960-100	106
M50960-50	106
M50960-5024	106
M56100R-A	68
M63100R	70
M63100RDF	70
M63100Y	84
M63100YDF	84
M63121Y	85
M63121YDF	85
M63122Y	85
M63123Y	85
M63201BCL	58
M63201R	58
M63201WCL	58
M63201Y	58
M63201YCL	58
M63201Y-X	58
M63253CH	109
M63318-A	77
M63318-A-GSKT	77
M63318R-A	71
M63318R-A-GSKT	71
M63318RCL-A	71
M63318Y-A	86
M63318YCL-A	86
M63319R	71, 102
M63320-A	76
M63320-ACH	76
M63320R-A	69
M63320R-ACH	69
M63320RCL-A	69
M63320Y-A	84
M63322R	70
M63322R-X	70
M63322RCL	70

PART NUMBER	PAGE
M63322R-DV	82
M63322RDF	70
M63322RDF-X	70
M63323-A	76
M63323R-A	69
M63324-A	76
M63324-ADF	76
M63339Y	84
M63339YDF	84
M63339YCL	84
M63339YCLDF	84
M63346R	70
M63346R-X	70
M63346RDF	70
M63346RDF-X	70
M63347-A	76
M63347-ADF	76
M63348RDF-MH	66
M63348R-MH	66
M63350	76
M63350R	69
M63350-TAPE	65, 69
M63350Y	84
M63351R-X	69
M63351Y-X	84
M63352R-X	69
M63353R	57
M63353WYCL	57
M63353Y	57
M63353YCL	57
M63353YGCL-A	57
M63354-HYB	65
M63354R	69
M72270R	97
M72270RCL	97
M72270Y	97
M72270YCL	97
M84400	35
M84403-A	39
M84403-A-D	39
M84404-A	39
M84405-C	31
M84405-PIR	31
M84406-C	31
M84406-PIR-X	31
M84407-C	34

PART NUMBER	PAGE
M84411-C	35
M84414-BCW	35
M84414-BWW	35
M84415-B	37
M84418	36
M84418-SW	36
M84419-E	26
M84420-E	26
M84420YWCL-DC	26, 52
M84421-E	26
M84422-E	26
M84424-B	39
M84426	36
M84426-SW	36
M84426BLK	36
M84427-B	34
M84427-PIR	34
M84427-SW	34
M844280-A	39
M844280-A-D	39
M844280B-CH	39
M844282-A	39
M84434-A	32
M84434RW-A	32
M84435-A	32
M84435RW	32
M84436	33
M84438RW	35
M84441	33
M84441-X	33
M84442	31
M84443	31
M84444-A	37
M84445-E	26
M84446BLK	34
M84448	33
M84449	33
M84450	38
M84451	38
M84452	38
M84453	38
M84454	38
M84455	37
M84456-D	38
M84457-D	38
M84458-D	38

PART NUMBER PAGE REFERENCE

HEADLIGHTS

WORK LIGHTS

INTERIOR LIGHTS

WARNING & SAFETY

STOP / TURN / BACK-UP

CLEARANCE MARKER

ACCESSORIES

PART NUMBER	PAGE
M84459-D	38
M84460-D	38
M85401R	64
M85417R	63
M85417R-X	63
M85417R-KIT	63
M85427R-YCL	62
M85437R-WL	63
M85801R	65
M85801RCL	65
M90061R	81
M90070R	81
M90070Y	81
M90081Y	81
M90450	81
M95097	47
M95102	47
M95107	47
M95822	47
M96097	47
M97097	47
M97102	47
M97107	47
M97822	47
MAX-TAG	113
MAXXIMA BANNER	113
MB-91	113
MB-95	113
MCAP-WHITE	113
MF-27	112
MF-28	112
MF-46	112
MF-49-KIT	112
MFL-200SY	10
MFL-200W	10
MHL-05HILO	8
MHL-90MMHI	9
MHL-90MMLO	9
MHL-90MMHILO	9
MHLE-07HILO	8
MHLE-07HILO-MH	6
MHLE-4X6DRL	7
MHLE-4X6HI-A	7
MHLE-4X6HI-MH	6
MHLE-4X6LO-A	7
MHLE-4X6LO-MH	6

PART NUMBER	PAGE
MHLE-5X7HILO	8
MHLE-5X7HILO-MH	6
MLR-301650D	114
MLS-1015-AD	41
MLS-1827-A	41
MLS-1827-A-SW	42
MLS-1827BL	41
MLS-1827R	41
MLS-1827WW-A	41
MLS-1827Y	41
MLS-196300R-MC	41
MLS-2436-A	41
MLS-2436-AD	41
MLS-2436-A-SW	42
MLS-2436BL	41
MLS-2436R	41
MLS-2436WW-A	41
MLS-2436Y	41
MLS-3654-A	41
MLS-3654BL	41
MLS-3654R	41
MLS-3654WW-A	41
MLS-3654WYCL	41
MLS-3654Y	41
MLS-4569-A	41
MLS-4569-A-SW	42
MLS-76114W-MC	41
MLS-78120-AD	41
MLS-92141W-MC	41
MLS-96147W-MC	41
MLS-D36216-X	42
MLS-G1020	40
MLS-G1020R	40
MLS-G1020Y	40
MLS-G1040	40
MLS-G1040R	40
MLS-G1040Y	40
MLS-STTB60-X	73
MPWL-100L	116
MPWL-150L	116
MPWL-60L	116
MPWL-S100L	116
MPWL-S40L	116
MRD-1	111
MRD-2	111
MRH-11	20

PART NUMBER	PAGE
MSL-202000F	114
MSL-202500C	114
MSL-404400F	115
MSL-404600SC	115
MSL-404800C	115
MSLS-1218	40
MSLS-1827	40
MSLS-1827-DT04	40
MSLS-1827LNK	42
MSLS-2436	40
MSLS-2436-DT04	40
MSLS-2436LNK	42
MSLS-2436R	40
MSLS-2436Y	40
MSLS-3654	40
MSLS-3654-DT04	40
MSLS-3654Y	40
MSLS-4569	40
MSLS-78120	40
MSLS-196300R	40
MSLS-196300Y	40
MSLS-ML9	42
MSLS-SL6	42
MSLS-STKIT	42
MSLS-TLINK	42
MSPHL-20DRL	5
MSPHL-20DRL-MH	5
MTBL-10-A	23
MWBL-1-A	23
MWL-01B	20
MWL-01GUARD	20
MWL-04	20
MWL-10SP	29
MWL-11HL	20
MWL-12	20
MWL-13-A	29
MWL-14-A	29
MWL-16-A	17
MWL-19B-MH	13
MWL-19-B	13
MWL-19BY-MH	13
MWL-20-A	21
MLW-20-AD	21
MWL-21	21
MWL-26-B	14
MWL-28	15

PART NUMBER	PAGE
MWL-29	15
MWL-30	15
MWL-32	28
MWL-33	27
MWL-34	27
MWL-35	27
MWL-36-A	24
MWL-38-A	14
MWL-39-A	14
MWL-41	16
MWL-42	16
MWL-42WYCL-DC	24
MWL-43	16
MWL-45	21
MWL-47	22
MWL-48	22
MWL-50-A	17
MWL-51LS	25
MWL-52	25
MWL-57-A	17
MWL-61	18
MWL-62	18
MWL-63	29
MWL-63-X	29
MWL-64	18
MWL-65	28
MWL-66	28
MWL-360	23
MWL-360-MAG	23
MWL-360-REM	23
MWL-500	19
MWL-501	19
MWL-510	19
MWL-511	19
MWL-520	19
MWL-521	19
PLB-630-A	10
SDL-35R	60
SDL-35Y	60
SDL-50-A	60
SDL-52-A	60

LIMITED WARRANTY

Maxxima extends a limited warranty to the original purchaser that Maxxima products are free from defects in materials and workmanship. Maxxima will replace any warranted product to the original consumer/purchaser if the product fails because of defects due to workmanship or materials within the warranty period, as stated in this catalog under the specific model number. This warranty does not constitute a product guarantee and Maxxima does not assume any obligation beyond sending a free replacement product.

The Limited Warranty does not apply to severe applications such as off-road vehicles and construction equipment. These examples are not all inclusive of such excluded applications.

Corrosive chemicals, petroleum products, and harsh cleaners are incompatible with Maxxima lights and their use will void this limited warranty.

The Limited Warranty is not transferable and applies to the original installation of the Maxxima lights for the warranty period.

Under no circumstances will Maxxima be liable for incidental, consequential or punitive damages whether or not the product is covered by this limited warranty.

MISUSE & IMPROPER WIRING OR GROUNDING

Maxxima lights are designed to operate in standard Stop/Tail/Turn, and Park/Turn modes only. Any attempt to rewire the lights to operate in high intensity mode (Stop or Turn mode), for prolonged use, will result in overheating and damage to the product and will void this limited warranty.

Failure to properly ground Maxxima lights, improperly wiring such lights, or any other misuse, abuse or unauthorized use of Maxxima products will void this limited warranty.

PRODUCT REPLACEMENT INSTRUCTIONS

Please contact your local Maxxima Sales Representative or call Maxxima Customer Service at 631-434-1200, fax to 631-434-1457, or email returns@maxxima.com for instructions and a Return Goods Authorization (RGA) number.

TECHNICAL SPECIFICATIONS

ALL PRODUCTS/SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Maxxima will constantly strive to improve the Quality, Reliability, Function, and Design of our products.

Amp Draw Tolerance

$\pm 10\%$

Lumen Output Tolerance

$\pm 15\%$



125 CABOT COURT, HAUPPAUGE, NY 11788 USA

TEL: 631.434.1200 1.866.MAXXIMA

FAX: 631.434.1457 INFO@MAXXIMA.COM

WWW.MAXXIMA.COM