

NEW PRODUCTS

MAY 1ST, 2025



**SHARE YOUR
PHOTOS ON**



**FACEBOOK OR INSTAGRAM
USING @MAXXIMA**

PANOR CORP/MAXXIMA

125 Cabot Court, Hauppauge, NY 11788 USA

Tel: 631.434.1200 | 1.866.MAXXIMA

info@maxxima.com | www.maxxima.com

    /maxxima

NEW

M20561 ELITE 60" LED TOW & RECOVERY BAR



Amber Warning



Red S/T/T & White Work Lights



Amber Traffic Director



FEATURES & BENEFITS

- 60" Amber Tow Bar – Low Profile Linear LED Lightbar
- Fully Populated 22-Heads with Work Lights, Stop/Tail/Turn, and Traffic Director
- Amber Flashing Warning Front, Sides, and Rear
- Red Stop/Turn & Tail Lights and Rear Facing White Work Lights
- 30 Programmable Flashing Warning Patterns and 10 Traffic Director Patterns
- Low Power (Dim) Mode and Front Cut Off
- 12/24VDC Dual Voltage
- Optional Pilot Mode – No Dark Time Between Flashes
- 3 Program Modes / Memory Slots (e.g. Loading, Transport, Stand-By)
- Discrete Wiring – No Laptop Needed to Program
- 25-Foot Cable, 15-Conductor Jacketed Cable
- Heavy Duty U-Shape Tow Bracket and Mounting Hardware Included
- Approvals: J595 Class 1, J845 Class 1A, CA Title 13
- Easy Serviceability while Mounted on Vehicle – Service Parts Available
- 5 Year Warranty



PART NUMBER DESCRIPTION

M20561 60" LED Tow Bar "Elite", 22 Amber Heads, Work Lights, S/T/T, Traffic Director

SPECIFICATIONS


Voltage 12/24VDC Dual Voltage
Max Amp Draw 18A Max 12V / 9A Max 24V
Dimensions 59.4" W x 1.7" H x 11.8" D
Mounting Flat Mount, U-Bracket Included
Connector 15 Jacketed Wires, 25' Length
LEDs 22 LED heads, 252 Total LEDs
Legal Heading J595 Class 1, J845 Class 1A, CA13
SAE W3-1M, W-1M, CA113




Scan to learn more

NEW


M20560 SELECT 60" LED TOW & RECOVERY BAR

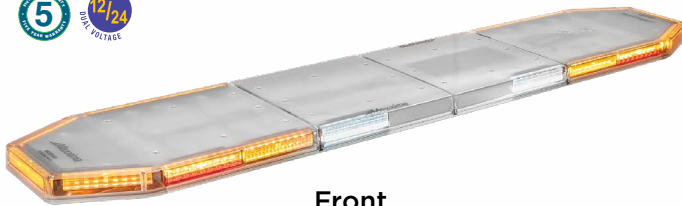

Front

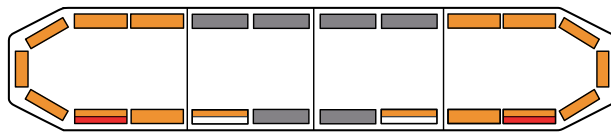

Rear



PART NUMBER DESCRIPTION

M20560 60" LED Tow Bar "Select", 16 Amber Heads with Work Lights, Stop/Tail/Turn

SPECIFICATIONS

Voltage 12/24VDC Dual Voltage
Max Amp Draw 14A Max 12V / 7A Max 24V
Dimensions 59.4" W x 1.7" H x 11.8" D
Mounting Flat Mount, U-Bracket Included
Connector 15 Jacketed Wires, 25' Length
LEDs 16 LED heads, 180 Total LEDs
Legal Heading J595 Class 1, J845 Class 1A, CA13
SAE W3-1M, W-1M, CA113

FEATURES

- 60" Amber Tow Bar – Low Profile Linear LED Lightbar
- 16-Heads with Work Lights and Stop/Turn/Tails
- Amber Flashing Warning Front, Sides, and Rear
- Red Stop/Turn & Tail Lights and Rear Facing White Work Lights
- 30 Programmable Flashing Warning Patterns
- Low Power (Dim) Mode and Front Cut Off
- Discrete Wiring – No Laptop Needed to Program
- 25-Foot Cable, 15-Conductor Jacketed Cable
- Heavy Duty U-Shape Tow Bracket and Mounting Hardware Included
- Approvals: J595 Class 1, J845 Class 1A, CA Title 13
- Easy Serviceability while Mounted on Vehicle – Service Parts Available
- 5 Year Warranty

NEW

MRP-20500-SERIES SERVICE PARTS



MRP-20501



MRP-20502



MRP-20503



MRP-20504



MRP-20505



MRP-20506



MRP-20507



MRP-20508

PART NUMBER DESCRIPTION

MRP-20501 Replacement Mounting Kit – M20560_61 60" Tow Bar: 2 Pcs. U-Bracket & Hardware
MRP-20502 Replacement Top Dome, End Section – M20560_61 60" Tow Bar
MRP-20503 Replacement Top Dome, Center Section – M20560_61 60" Tow Bar
MRP-20504 Replacement CPU Motherboard – M20560_61 60" Tow Bar
MRP-20505 Replacement Light Head, Front, Rear, or Corner **All Amber** – M20560_61 60" Tow Bar
MRP-20506 Replacement Light Head, Rear **Amber/White** Work Light – M20560_61 60" Tow Bar
MRP-20507 Replacement Light Head, Rear **Amber/Red** S/T/T – M20560_61 60" Tow Bar
MRP-20508 Replacement Cable Assembly, 25 foot – M20560_61 60" Tow Bar

NEW

M20488BYCL-DC DUAL COLOR BLUE / AMBER MINI-LIGHTBAR




Entire Lightbar Can
Light Blue, Amber, Or a
Combination of Both



Low Profile Design

Clear Lens with Black Top

M20488-SERIES PERMANENT MOUNT OPTIONS

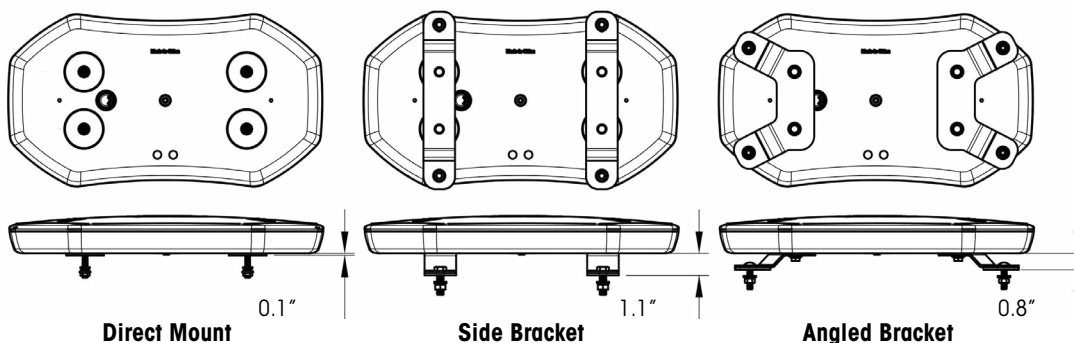

Direct Mount

Side Bracket

Angled Bracket

PART NUMBER DESCRIPTION

NEW M20488BYCL-DC Warning Minibar, **Amber/Blue** Clear Lens, Permanent Mount

ALSO AVAILABLE IN THESE COLOR COMBINATIONS:

- M20488YCL** Warning Minibar, **Amber** Clear Lens, Mag Mount
- M20488YWCL** Warning Minibar, **Amber/White** Clear Lens, Permanent Mount
- M20488GYCL-DC** Warning Minibar, **Amber/Green** Clear Lens, Permanent Mount

SPECIFICATIONS

Voltage	12/24VDC
Amp Draw	4.0A 12V / 2.0A 24V
Dimensions	15.4" L x 8.5" H x 2.2" H
Mounting	4 Hole Surface (See Below)
Connector	3 Jacketed Wires, Blunt Cut, 15"
LEDs	160 (80 Blue, 80 Amber)
Legal Heading	W3-1
SAE	J845 Class 1A

FEATURES

- SAE Class 1 Compliant Warning Device
- 18 Programmable Flash Patterns with Two Memory Save Modes
- Can Flash Blue Only, Amber Only, or Amber & Blue Patterns
- Selectable Color Patterns
- 3 Mounting Options Include
- 5 Year Warranty

NEW

112DB HEAVY DUTY BACK-UP ALARMS



PART NUMBER	DESCRIPTION
M99112	112db Back-Up Alarm Hard-Wired 12-80 VDC
M99872	87-112db Back-Up Alarm, Self-Adjusting Hard-Wired 12-80 VDC

SPECIFICATIONS	
Voltage	12-80 VDC Multi-Voltage
Amp Draw	0.8A 12V / 0.5A 24V
Dimensions	5.0" W x 2.9" H x 2.8" D
Mounting	2 Hole Surface, 4.1" Center to Center
Connector	2 Wires, Blunt Cut, 8"
Legal Heading	Type A (112dB), Type F (Adjustable)
SAE	J994

FEATURES	
• SAE J994 Compliant Back-Up Alarms • Available in 112dB Fixed, and 87-112 Self Adjusting • Self Adjusting M99872 Automatically Adjusts from 87dB to 112dB to Exceed Ambient Noise Levels • Heavy Duty Cast Iron Housing • Polycarbonate Front Cover • 2 Year Warranty	

MAXXIMA FAMILY OF BACK-UP ALARMS



M95-Series
2 Stud Terminals



M96-Series
Ghost Alarm
Referred to as radio static "white noise", we call it our Ghost Alarm



M97-Series
Hard-Wired



Side View



M98-Series
Shown in Grommet
(Grommet Included)




M98-Series
Alarm Only

PART NUMBER	DESCRIPTION
M95097	97dB Back-Up Alarm 12-80 VDC
M95102	102dB Back-Up Alarm 12-80 VDC
M95107	107dB Back-Up Alarm 12-80 VDC
M95822	82-102dB Adjustable Back-up Alarm 12-80 VDC
M96097	97dB Back-up Poly-Phonic Ghost Alarm Hard-Wired 12-80 VDC
M97097	97dB Back-up Alarm Hard-Wired 12-80 VDC
M97102	102dB Back-up Alarm Hard-Wired 12-80 VDC
M97107	107dB Back-up Alarm Hard-Wired 12-80 VDC
M97822	82-102dB Back-up Alarm, Self-Adjusting Hard-Wired 12-80 VDC
M98097	97dB Back-Up Alarm, 4" Grommet Mount 12/24VDC
M98102	102dB Back-Up Alarm, 4" Grommet Mount 12/24VDC

NEW

M42745Y-CA13 WARNING BEACON AMBER 6.9" – CA TITLE 13

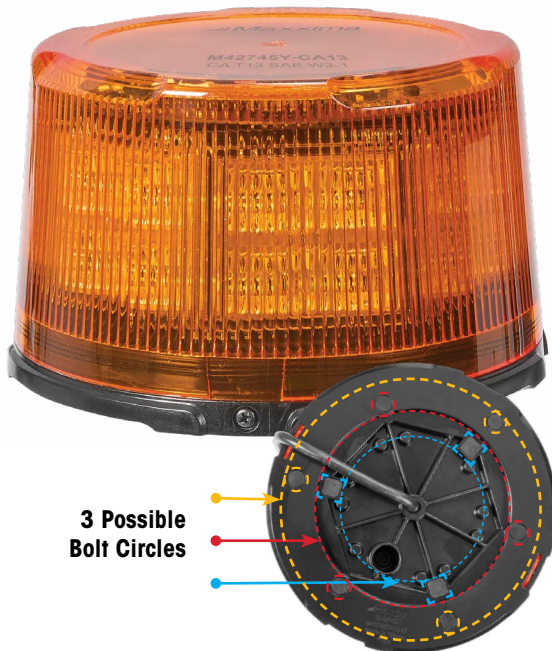

3 Possible Bolt Circles

PART NUMBER DESCRIPTION

M42745Y-CA13 Warning Beacon Amber LED, Class 1, 6.9" 12/24VDC – CA Title 13

SPECIFICATIONS

Voltage 12/24VDC
Amp Draw 4.0A 12V / 2.0A 24V
Dimensions 6.9" Diam x 4.1" H
Mounting 3 Hole Surface
Connector 6 Wires, Jacketed, 12"
LEDs 36 (24 Side, 12 Top)
Legal Heading W3-1, CA T13
SAE J845 Class 1A, CA13


FEATURES

- SAE Class 1 LED Warning Beacon
- California CCR Title 13 Compliant (CA 13)
- 32 Programmable Flash Patterns
- 3 Memory Slots, or Modes, Available
- Can Sync Multiple Beacons
- Programmable Dim Mode Available
- 12 LEDs on Top Can be Toggled ON or OFF
- 3 Possible Bolt Circles
- Polycarbonate Dome & Cast Alum. Base
- Retail Packaging
- 5 Year Warranty

CA TITLE 13 COMPLIANT

NEW

M42730Y-CA13 LED WARNING BEACON – CA TITLE 13

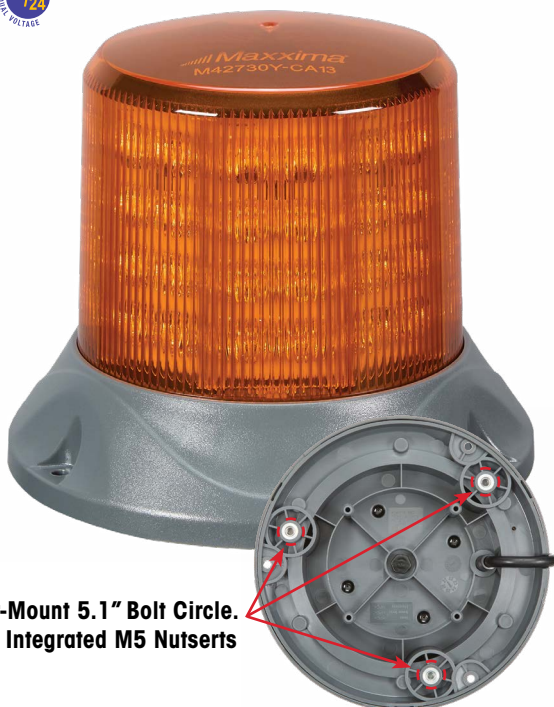

Under-Mount 5.1" Bolt Circle. Integrated M5 Nuts

PART NUMBER DESCRIPTION

M42730Y-CA13 Warning Beacon Amber LED, Class 1, CA13, 12-24VDC Dual-Voltage

SPECIFICATIONS

Voltage 12/24VDC
Amp Draw 3.4A 12V / 1.7A 24V
Dimensions 6.5" Diam. x 5.4" H
Mounting 3 Hole Surface, 5.9" Bolt Circle
Connector 3 Wire Blunt Cut, 22"
LEDs 64
Legal Heading W3-1
SAE J845 Class 1A, CA13

FEATURES

- SAE Class 1 LED Warning Beacon
- California CCR Title 13 Compliant (CA 13)
- 21 Programmable Flash Patterns
- Can Sync Multiple Beacons
- 2 Possible Bolt Circles:
 - Exterior: 3 Hole 5.9" Bolt Circle
 - Interior: 3 Hole 5.1" Bolt Circle
- Black Out Disc on Top of Dome
- Polycarbonate Dome & Base
- Retail Packaging
- 5 Year Warranty

CA TITLE 13 COMPLIANT

NEW

M42725Y WARNING BEACON AMBER LED 6"



PART NUMBER DESCRIPTION

M42725Y Warning Beacon Amber LED, Class 1, 6.7" 12/24VDC

SPECIFICATIONS

Voltage 12/24VDC
Amp Draw 1.6A 12V / 0.8A 24V
Dimensions 6.7" Diam x 5.5" H
Mounting 3 Hole Surface, 6.0" Bolt Circle
Connector 3 Jacketed Wires, Blunt Cut, 12"
LEDs 48
Legal Heading W3-1
SAE J845 Class 1A

FEATURES

- SAE Class 1 Amber LED Beacon
- 12 Programmable Flash Patterns
- Mounting Screws Included
- 12/24VDC Dual Voltage
- Polycarbonate Dome & Base
- 5 Year Warranty

NEW

M42718Y LED WARNING BEACON – SAE CLASS 2



"WHY SETTLE FOR A CLASS 3 BEACON WHEN YOU CAN HAVE A MAXXIMA CLASS 2 IN THE SAME SIZE?"



Notched Base Allows Cable Exit

PART NUMBER DESCRIPTION

M42718Y Warning Beacon Amber LED, Class 2, 5" 12-80 VDC

SPECIFICATIONS

Voltage 12-80 VDC Multi-Voltage
Amp Draw 0.7A 12V / 0.4A 24V
Dimensions 5.1" Diam. x 3.6" H
Mounting 3 Hole Surface, 4.7" Bolt Circle
Connector 3 Wire Blunt Cut, 13"
LEDs 16
Legal Heading W3-2
SAE J845 Class 2A

FEATURES

- SAE Class 2 LED Warning Beacon
- 12 Programmable Flash Patterns
- 12-80 VDC Multi-Voltage
- Industry Standard Bolt Circle
- Polycarbonate Dome & ABS Base
- Retail Packaging
- 5 Year Warranty

LED WORK LIGHT & MOUNTING GROMMET

NEW

MWL-62-A 7,000 LUMENS LED WORK LIGHT

AVAILABLE IN JUNE



PART NUMBER DESCRIPTION

MWL-62-A Square 144 LED Work Light 7,000 Lumens
12-24VDC, A-Series

SPECIFICATIONS

Lumens 7,000
Voltage 12/24VDC Dual Voltage
Amp Draw 7.0A 12V / 3.5A 24V
Dimensions 4.9" W x 4.3" H x 3.3" D
Mounting M10 Stainless Steel Bolt
Connector Integrated Deutsch DT04-Style
Includes DT06 Pigtail, 5" Long, Blunt Cut
LEDs 144

FEATURES

- Ultra High Powered – 7,000 Lumens
- 110° Wide Flood Beam Angle
- 12/24VDC Dual Voltage
- Integrated Deutsch-Style Connector
- Pigtail Connector Included
- Cast Aluminum Housing, Polycarbonate Lens
- Replaces MWL-62
- 5 Year Warranty

NEW

M50608 LOW PROFILE 6" OVAL GROMMET



Side Profile

PART NUMBER DESCRIPTION

M50608 6" Oval Low Profile Grommet

SPECIFICATIONS

Dimensions 7.5" L x 3.25" W x 0.8" D
Hole Cutout 6.75" x 2.5" (1.25" radius)
Designed for Panel Thickness of 0.1" to 0.25"
PVC Material

FEATURES

- Premium Vinyl (PVC) Grommet
- Low Profile
- Compatible with M63350-Series (M63350, M63351, M63352, M63354HYB)
- Compatible with M63353-Series
- Compatible with M63201-Series
- Packaged Loose, 25 Grommets per Bag

INTERIOR DOME LIGHT & HYBRID S/T/T – B/U

NEW



M84406PIR-ADX PIR MOTION SENSOR DOME LIGHT



PART NUMBER DESCRIPTION

NEW M84406PIR-ADX	5.5" LED Dome Light with PIR Sensor, Aptiv Plug – Bulk Pack
M84406PIR-AX	5.50" LED Gray Dome Light, 600 Lumens, PIR Sensor – Bulk Pack

SPECIFICATIONS

Lumens	600
Voltage	12.8VDC
Amp Draw	0.6A
Dimensions	5.5" Diameter x 1.0" D
Mounting	3 Hole Surface, 5" Bolt Circle
Connector	Delphi Aptiv #12010973, 12" Length
LEDs	24


FEATURES

- 5.5" Round, Surface Mount, Dome Light
- 600 Lumens
- PIR Motion Sensor – 3 Minute Timer
- 12" Wire Leads with Delphi Aptiv Connector
- Also Available in Blunt Cut M84406PIR-AX
- Mounting Screws Included
- Polycarbonate Lens, ABS & PC Housing
- Bulk Pack Only
- 5 Year Warranty

NEW



M85801R-X HYBRID STT & BU WITH .180 BULLET TERMINALS

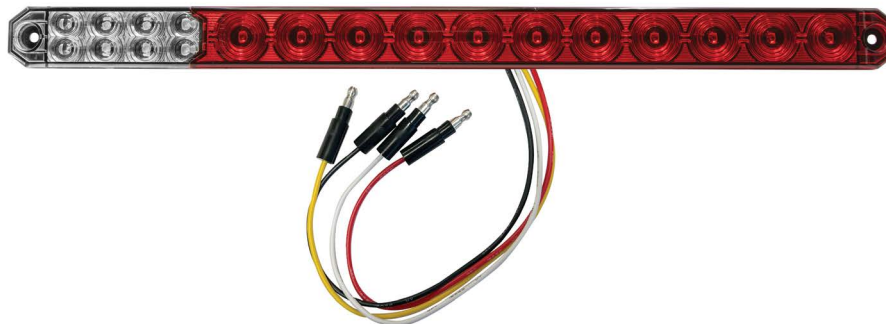

PART NUMBER DESCRIPTION

NEW M85801R-X	1" x 17" Hybrid Combination STT & Back-Up, Bullet Connectors – Bulk Pack
M85801R	1" x 17" Hybrid Combination Stop/Turn/Tail & Back-Up, Blunt Cut Wires

SPECIFICATIONS

LEDs	27 (16 White, 11 Red)
Voltage	12.8VDC
Amp Draw	0.4A Max
Dimensions	17.0" L x 1.2" W x 0.5" D
Mounting	2 Hole Surface, 16-1/8" C to C
Connector	3 Wires, .180 Bullets, 12"
Legal Heading	R 16 S2 T2
DOT / SAE	J593, J2040, J2261


FEATURES

- Hybrid Combo Stop/Turn/Tail & Back-Up
- Thin Design – Only 1.2" Wide
- Horizontal or Vertical Mount
- Also Available in Blunt Cut M85801R
- Mounting Screws & Caps Included
- Polycarbonate Lens & Housing
- Bulk Pack Only
- 5 Year Warranty

HYBRID COMBINATION S/T/T & BACK-UP

NEW

M85401R 4" ROUND HYBRID COMBO S/T/T & BACK-UP – GROMMET MOUNT

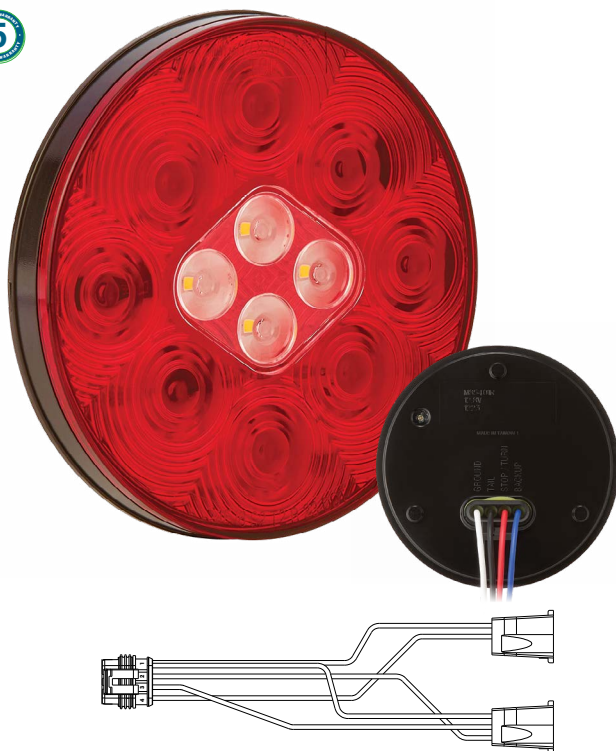

M50940 Adapter Pigtail Included

PART NUMBER DESCRIPTION

M85401R	4" Round Combination S/T/T + Back-Up, Grommet Mount
M50940	4-Pin DryFit to PL-3 and PL-2 Splitter Adapter

SPECIFICATIONS

Voltage	12.8VDC
Amp Draw	Stop 180mA, Tail 10mA, B/U 250mA
Dimensions	4.3" Diam. x 1.4"D
Mounting	4" Grommet
Connector	Integrated 4-Pin DryFit + Includes Pigtail
LEDs	13 (9 Red, 4 White)
Legal Heading	I6 S2 T2 R
DOT/SAE	J593, J2040, J2261

FEATURES

- Hybrid Combination Stop/Turn/Tail & Back-Up Lamp
- Fits 4" Round Grommet (M50400-B Sold Separately)
- M50940 Adapter Pigtail Included: 4-Pin DryFit to PL-3 + PL-2
- Acrylic Lens / ABS Housing
- 5 Year Warranty

NEW

M85601R 6" OVAL HYBRID COMBO S/T/T & BACK-UP – GROMMET MOUNT



M50940 Adapter Pigtail Included

PART NUMBER DESCRIPTION

M85601R	6" Oval Combination S/T/T + Back-Up, Grommet Mount
M50940	4-Pin DryFit to PL-3 and PL-2 Splitter Adapter

SPECIFICATIONS

Voltage	12.8VDC
Amp Draw	Stop 180mA, Tail 10mA, B/U 250mA
Dimensions	6.5" W x 2.3" H x 1.4" D
Mounting	6" Grommet
Connector	Integrated 4-Pin DryFit + Includes Pigtail
LEDs	14 (10 Red, 4 White)
Legal Heading	I6 S2 T2 R
DOT/SAE	J593, J2040, J2261

FEATURES

- Hybrid Combination Stop/Turn/Tail & Back-Up Lamp
- Fits 6" Oval Grommet (M50600-B Sold Separately)
- M50940 Adapter Pigtail Included: 4-Pin DryFit to PL-3 + PL-2
- DOT Compliant in Both Horizontal and Vertical Mount
- Acrylic Lens / ABS Housing
- 5 Year Warranty

6" OVAL HYBRID COMBO S/T/T & BACK-UP

NEW



M85623R 6" OVAL HYBRID COMBO S/T/T & BACK-UP – FLANGE MOUNT



PART NUMBER DESCRIPTION

M85623R 6" Oval Hybrid Combination S/T/T & Back-Up – Flange Mount

SPECIFICATIONS

LEDs 13
Voltage 12.8VDC
Amp Draw Stop 250mA, Tail 15mA, B/U 150mA
Dimensions 7.9" W x 3.3" H x 1.7" D
Mounting 2 Hole Flange, 7.25" C to C
 - Requires 6.7" x 2.4" Cutout
Connector Qty. (2) PL-3 Integrated
Legal Heading I6 S2 T2 R
DOT/SAE J593, J2040, J2261

FEATURES

- 6" Oval Hybrid Combo Stop/Turn/Tail & Back-Up
- Flange Mount with 7.25" Bolt Spacing
- Requires 6.7" x 2.4" Cutout
- Qty. (2) Industry Standard PL-3 Connectors Integrated
- Polycarbonate Lens & Housing
- DOT Compliant in Both Horizontal and Vertical Mount
- 5 Year Warranty

NEW



M85621R 6" OVAL HYBRID COMBO S/T/T & BACK-UP – GROMMET MOUNT



PART NUMBER DESCRIPTION

M85621R 6" Oval Hybrid Combination S/T/T & Back-Up – Grommet Mount

SPECIFICATIONS

LEDs 13
Voltage 12.8VDC
Amp Draw Stop 250mA, Tail 10mA, B/U 150mA
Dimensions 6.5" W x 2.3" H x 1.6" D
Mounting 6" Grommet
Connector Qty. (2) PL-3 Integrated
Legal Heading I6 S2 T2 R
DOT/SAE J593, J2040, J2261

FEATURES

- 6" Oval Hybrid Combo Stop/Turn/Tail & Back-Up
- Fits 6" Oval Grommet (M50600-B Sold Separately)
- Qty. (2) Industry Standard PL-3 Three-Pin Connectors Integrated (Uses M50900 Pigtail)
- Polycarbonate Lens & Housing
- DOT Compliant in Both Horizontal and Vertical Mount
- 5 Year Warranty

PANOR CORP / MAXXIMA

125 Cabot Court, Hauppauge, NY 11788 USA

Tel: 631.434.1200 | 1.866.MAXXIMA Fax: 631.434.1457

info@maxxima.com | www.maxxima.com

DISTRIBUTED BY: