

NEW PRODUCTS

EFFECTIVE MAY 1ST, 2024



29 NEW PRODUCTS



SHARE YOUR PHOTOS
ON FACEBOOK OR INSTAGRAM USING  **@MAXXIMA**

PANOR CORP/MAXXIMA

125 Cabot Court, Hauppauge, NY 11788 USA

Tel: 631.434.1200 | 1.866.MAXXIMA | Fax: 631.434.1457

info@maxxima.com | www.maxxima.com

    / maxxima

LED INTERIOR LIGHTS

NEW

8" ROUND FLUSH MOUNT 1,400 / 300 LUMENS LED DOME LIGHTS



NEW

PART NUMBER	DESCRIPTION
M84448	8" Dome Light, 1,400 Lumens
M84449	8" Dome Light, 1,400 Lumens, 3 CCT, Brushed Nickel

SPECIFICATIONS	FEATURES
Lumens	1,400 HI / 300 LO
Voltage	12.8VDC
Amp Draw	1.0A / 0.2A
Dimensions	8.6" Diam x 0.56" D
Mounting	4 Hole Flush, 8" Bolt Circle, 7.3" Cutout
Connector	3 Pin, Rectangular AMP-Style Mate-N-Lock Connector, 7" Lead
LEDs	51 (M84448) 102 (M84449)

• HI/LO – 1,400 / 300 Lumens • Direct Replacement for Many Popular Ambulance Lights • 3 Discrete Wires for HI/LO Switch • Available in White or Alum. Flange • M84449: 3-pos. CCT Switch, Selectable Color Temp. 3,000K, 4,000K, 5,000K • Universal 8" Bolt Pattern • Frosted Lens – No Hot Spots • Polycarbonate Lens • Aluminum Housing • 5 Year Warranty
--

NEW

45 DEGREE ANGLED LED RIGID LINEAR STRIP LIGHTS



45 Degree Light Output

PART NUMBER	DESCRIPTION
M84456-D	45 Degree Low Profile Rigid White Linear Interior Strip Light 12"
M84457-D	45 Degree Low Profile Rigid White Linear Interior Strip Light 18"
M84458-D	45 Degree Low Profile Rigid White Linear Interior Strip Light 24"
M84459-D	45 Degree Low Profile Rigid White Linear Interior Strip Light 36"
M84460-D	45 Degree Low Profile Rigid White Linear Interior Strip Light 48"

PART NUMBER	M84456-D	M84457-D	M84458-D	M84459-D	M84460-D
SPECIFICATIONS	12" STRIP	18" STRIP	24" STRIP	36" STRIP	48" STRIP
Lumens	600	800	1,100	1,600	2,000
Voltage	12.8VDC	12.8VDC	12.8VDC	12.8VDC	12.8VDC
Amp Draw	0.6A	0.8A	1.2A	1.7A	2.0A
Length	13.4" L	19" L	25.3" L	37.1" L	48.4" L
W x D	0.6" W x 0.6" H	0.6" W x 0.6" H	0.6" W x 0.6" H	0.6" W x 0.6" H	0.6" W x 0.6" H
Mounting	3M Tape	3M Tape	3M Tape	3M Tape	3M Tape
Connector	DT04, 3.8"	DT04, 3.8"	DT04, 3.8"	DT04, 3.8"	DT04, 3.8"
LEDs	36	48	72	111	144

FEATURES

- Corner-Mounted Rigid LED Strip Lights Or Under-Shelf Mounted
- 3M Tape Included, Not Attached Can Be Applied to One Side or Both
- Deutsch-Style DT04 Connector
- Frosted Lens with Wide Beam Angle
- ABS Body, Polycarbonate Lens, Aluminum Base
- 5 Year Warranty

MaxxBright HIGH POWERED LED WORK LIGHTS

NEW

MWL-500-SERIES MaxxBright WORK LIGHTS / SCENE LIGHTS



8,500 Lumens
SQUARE
MWL-500 / MWL-501

9,500 Lumens
ROUND
MWL-510 / MWL-511

19,000 Lumens
RECTANGULAR
MWL-520 / MWL-521

The **MaxxBright** MWL-500-Series are high-powered LED work lights. These are designed for the most demanding applications. These sturdy lights blast 8,500 Lumens to 19,000 Lumens in a flood beam pattern perfect for work zones or as scene lights. They features a black or white cast aluminum housing, with an integrated DT or DTP Deutsch-style connector and include the mating pigtails. The heavy duty bail mount brackets utilize 3 studs for a sturdy mount and can be adjusted to the proper angle. They features polycarbonate lenses and are backed by a 5 year warranty.

PART NUMBER	DESCRIPTION
MWL-500	Square MaxxBright Work Light 8,500 Lumens Black Housing
MWL-501	Square MaxxBright Work Light 8,500 Lumens White Housing
MWL-510	Round MaxxBright Work Light 9,500 Lumens Black Housing
MWL-511	Round MaxxBright Work Light 9,500 Lumens White Housing
MWL-520	Rectangle MaxxBright Work Light 19,000 Lumens Black Housing
MWL-521	Rectangle MaxxBright Work Light 19,000 Lumens White Housing

SPECIFICATIONS				FEATURES
	MWL-500 / 501	MWL-510 / 511	MWL-520 / 521	
Lumens	8,500	9,500	19,000	• MaxxBright High Powered Work Light • Available in 8,500, 9,500, or 19,000 Lumens Flood Beam / Scene Light • Available in Black or White Housing • Water-Tight Deutsch-Style Connector • Mating Pigtail Connector Included • Extra Heavy Duty Bail Mount Bracket • 5 Year Warranty
Voltage	12/24VDC Dual Voltage	12/24VDC Dual Voltage	12/24VDC Dual Voltage	
Amp Draw	8.0A 12V / 4.0A 24V	8.0A 12V / 4.0A 24V	17.5A 12V / 8.7A 24V	
Dimensions	5.8" W x 4.7" H x 3.5" D 5.3" Overall H w/ Brkt.	6" Diam. x 3.5" D 6.7" Overall H w/ Brkt.	13" W x 4.3" H x 3.5" D 4.9" Overall H w/ Brkt.	
Mounting	3 Bolts: 2 M8, 1 M10	3 Bolts: 2 M8, 1 M10	3 Bolts: 2 M10, 1 M12	
Connector	Integrated Deutsch-style DT04, Includes DT06 Pigtail, 19"	Integrated Deutsch-style DT04, Includes DT06 Pigtail, 19"	DTP04-Style on 12" Cable Includes DTP06 Pigtail, 7.5"	
LEDs	12	14	29	



LED CLEARANCE MARKERS

NEW

WESTERN TRAILERS OE-STYLE CLEARANCE MARKERS



M63125R-WT



M63125Y-WT



Clear Lens
M63125RCL-WT,
M63125YCL-WT



3-Wire
M63125RAS-WT

PART NUMBER	DESCRIPTION
M63125R-WT	Western Trailers Red Side Clearance Marker – Bulk Pack
M63125Y-WT	Western Trailers Amber Side Clearance Marker – Bulk Pack
M63125RCL-WT	Western Trailers Red Clear Lens Side Clearance Marker – Bulk Pack
M63125YCL-WT	Western Trailers Amber Clear Lens Side Clearance Marker – Bulk Pack
M63125RAS-WT	Western Trailers Red Side Clearance Marker / Aux. Stop – Bulk Pack

SPECIFICATIONS	FEATURES
LEDs	6
Voltage	12.8VDC
Amp Draw	55mA
Dimensions	4.7"W x 2.0"H x 1.2"D
Mounting	2 Hole Surface, 3" C to C
Connector	2 Leads, .180 Bullets, 4"
Legal Heading	P2 P3 PC2
DOT/SAE	J592, J2042

- Fits Existing Western Trailers Housing
- Polycarbonate Lens/Housing
- Available in Colored Lens or Clear Lens
- **Lightning Lens Optics**
- **US Patent Number 8,009,364**
- **US Patent No. 8,717,679 B2**
- Also Available in 3-Wire Red Aux. Stop
- 5 Year Warranty

FITS EXISTING OEM HOUSING



LED STOP/TURN/TAIL & AMBER PARK/TURN

NEW


RECTANGULAR THREE STUD STT/BU BOX LIGHT WITH LED LICENSE LIGHT



NEW

PART NUMBER	DESCRIPTION
M42220	Three Stud LED Box Style Multi Function Light – STT / BU
M42228L	Three Stud LED Box Style Multi Function Light – STT / BU + License Light

SPECIFICATIONS		FEATURES
LEDs	42 (STT: 16, BU: 22, LICENSE: 4)	• 3-Stud Universal Box Light
Voltage	12.8VDC	• With LED License Light
Amp Draw	290mA (B/U) 150mA (Stop), 60mA (License)	• And Stop/Turn/Tail & Back-Up
Dimensions	5.8" W x 6.8" H x 3.3" D	• Built In Reflex Reflector
Mounting	3-Stud	• Mate to Existing M42220
Connector	3 Leads Blunt Cut, 16" & Ground Stud	• High Impact Acrylic Lens
Legal Heading	A 16 R S2 T2 and L	• 5 Year Warranty
DOT/SAE	J587, J593, J594, J2040, J2261	

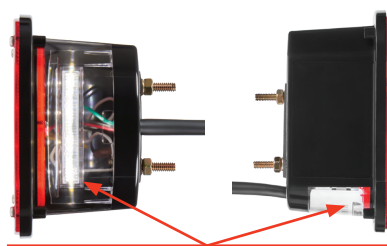

LED LICENSE LIGHT



NEW

4" ROUND AMBER CLEAR LENS PARK / FRONT / REAR TURN – GROMMET MOUNT



Lightning

NEW

PART NUMBER	DESCRIPTION
M42339YCL	4" Round Amber Clear Lens Park/Front/Rear/Turn Lightning Series
M42322RCL	4" Round Red Clear Lens Stop/Turn/Tail Lightning Series
M42347	4" Round White Back-Up Lightning Series

SPECIFICATIONS		FEATURES
LEDs	9	• Amber Park / Front Turn / Rear Turn
Voltage	12.8VDC	• Replaces M42322YCL
Amp Draw	180mA	• Integrated PL-3 Connector
Dimensions	4.3" Diam. x 1.8" Depth	• Patented Lightning Optics
Mounting	4" Grommet	• US Patent No. 8,009,364
Connector	Integrated PL-3	• US Patent No. 8,717,679 B2
Legal Heading	I6 P	• 5 Year Warranty
DOT/SAE	J222, J2261	



Clear Lens –
Lights Up Amber



Standard PL-3
Connector



Also Available 9 LED
Red Clear Lens Stop/Turn/Tail
M42322RCL



Also Available 9 LED
White Back-Up Lamp
M42347

LED S/T/T, BACK-UP, & AMBER TURN

M63320-SERIES 6" OVAL SURFACE MOUNT



RED STOP/TURN/TAIL



M63320R-A

M63320R-ACH

WHITE BACK-UP



M63320-A

M63320-ACH

NEW

NEW RED CLEAR LENS S/T/T



Clear Lens – Lights Up Red



Rear Image

NEW

NEW AMBER PARK FRONT/REAR TURN



Side Image

PART NUMBER DESCRIPTION

M63320-A	6" Oval White Back-Up, Surface Mount Black
M63320-ACH	6" Oval White Back-Up, Surface Mount Chrome
M63320R-A	6" Oval Red Stop/Turn/Tail, Surface Mount Black
M63320R-ACH	6" Oval Red Stop/Turn/Tail, Surface Mount Chrome
NEW M63320RCL-A	6" Oval Red Clear Lens Stop/Turn/Tail, Surface Mount Black
NEW M63320Y-A	6" Oval Amber Park/Front/Rear Turn, Surface Mount Black

SPECIFICATIONS RED R-A / RCL-A / R-ACH WHITE -A / -ACH

AMBER Y-A

FEATURES

	RED R-A / RCL-A / R-ACH	WHITE -A / -ACH	AMBER Y-A	FEATURES
LEDs	10	10	10	• 6" Oval Surface Mount
Voltage	12.8VDC	12.8VDC	12.8VDC	• Industry Standard 7.25" Bolt Spacing
Amp Draw	100mA / 10mA	270mA	250mA	• Red STT and White B/U Also Avail. in Chrome
Dimensions	7.8" W x 3.5" H x 0.7" D	7.8" W x 3.5" H x 0.7" D	7.8" W x 3.5" H x 0.7" D	• Red STT Available in Red or Clear Lens
Mounting	2 Hole Surface, 7.25" C to C	2 Hole Surface, 7.25" C to C	2 Hole Surface, 7.25" C to C	• Back-Up DOT Compliant for 1-Lamp or 2-Lamp
Connector	3 Leads Blunt Cut, 13"* *R-ACH 7" Leads	2 Leads Blunt Cut, 13"* *ACH 7" Leads	3 Leads Blunt Cut, 13"	• Amber Available in Amber Lens Only
Legal Heading	6 S2 T2	R	I6 P	• Horizontal or Vertical Mount
DOT/SAE	J2040, J2261	J593	J222, J2261	• 5 Year Warranty

6" OVAL HYBRID COMBINATION LIGHT

NEW



M85620R 6" OVAL SURFACE MOUNT COMBINATION S/T/T & BACK-UP



Side View



PART NUMBER	DESCRIPTION
M85620R	6" Oval Hybrid Combination S/T/T & BU – Surface Mount
SPECIFICATIONS	FEATURES
LEDs	13
Voltage	12.8VDC
Amp Draw	RED: 150mA / 10mA WHITE: 150mA
Dimensions	7.8" W x 3.5" H x 0.6" D
Mounting	2 Hole Surface, 7.25" C to C
Connector	Qty. (2) PL-3, 7" Leads
Legal Heading	I6 S2 T2 R
DOT/SAE	J593, J2040, J2261
	• 6" Oval Hybrid Combo Stop/Turn/Tail & Back-Up • Same Look & Size as M63320-Series (pg. 6) • Replaces M85615R & M85616R • Industry Standard 7.25" Bolt Spacing • Qty. (2) Industry Standard PL-3 Three-Pin Connectors • Polycarbonate Lens & Housing • DOT Compliant in Both Horizontal or Vertical Mount • 5 Year Warranty

S/T/T, BACK-UP, and CAB MARKER

NEW

6" OVAL FLANGE MOUNT – 10 LED



M63323R-A



M63323-A

PART NUMBER	DESCRIPTION
M63323R-A	Oval Red Stop/Turn/Tail – Flange Mount
M63323-A	Oval Back-Up – Flange Mount

SPECIFICATIONS	FEATURES
LEDs 10	• 6" Oval Stop/Turn/Tail and 6" Oval Back-Up
Voltage 12.8VDC	• Industry Standard Integrated Flange Mount
Amp Draw	• PL-3 Connector
- Red 100mA 10mA	• Horizontal or Vertical Mount
- White 270mA	• Polycarbonate Lens & Housing
Dimensions 7.8" W x 3.5" H x 0.7" D	• 5 Year Warranty
Mounting 2 Hole Flange, 7-1/4" C to C	
Connector 3 Wires, Blunt Cut, 13"	
Legal Heading	
- Red I6 S2 T2	
- White R	
DOT/SAE	
- Red J2040, J2261	
- White J593	

NEW

CHROME CAB MARKER – AMBER CLEAR LENS



NEW



PART NUMBER	DESCRIPTION
M17011Y	Chrome Cab Marker Amber
M17011YCL	Chrome Cab Marker Amber Clear Lens

SPECIFICATIONS	FEATURES
LEDs 17	• Chrome Cab Marker
Voltage 12.8VDC	• Popular Pete & KW Style
Amp Draw 140mA	• Available in Amber or Clear Lens
Dimensions 10.6 L x 3.9" W x 2.8" H	• Acrylic Lens, Chrome ABS Housing
Mounting 2 Hole Surface, 9-5/32" C to C	• Includes Gasket, Mounting Screws & O'Ring Seals
Connector 2 Leads Blunt Cut, 19"	• 5 Year Warranty
Legal Heading P2 P3 PC2	
DOT/SAE J592, J2042	



Clear Lens –
Lights Up Amber



Also Available with Amber Lens
M17011Y

LED S/T/T KIT and S/T/T + BU KIT

NEW

4" ROUND STOP/TURN/TAIL KIT WITH GROMMET & RIGHT ANGLE PLUG



Lightning



PART NUMBER	DESCRIPTION
M42346R-KIT	4" Round Red Lightning Series Stop/Turn/Tail Kit with Grommet & Right Angle Plug

SPECIFICATIONS	FEATURES
LEDs	6
Voltage	12.8VDC
Amp Draw	200mA
Dimensions	4.3" Diam. x 1.8"D
Mounting	4" Grommet (Included)
Connector	PL-3, 3 Leads, 12" (Included)
Legal Heading	I6 S2 T2
DOT/SAE	J2040, J2261
	- Our Most Popular 4" Stop Light Now in Kit Form with Grommet & Pigtail - Retail Packaging - Kit Includes (1) M42346R, (1) M50400-B, (1) M50900 - Patented Lightning Optics - US Patent No 8,009,364 - US Patent No 8,717,679 B2 - Polycarbonate Lens & Housing 5 Year Warranty

NEW

4" ROUND STT AND LED B/U KIT



Lightning



Retail Gift Box

PART NUMBER	DESCRIPTION
M42346RBU-KIT	4" Kit M42346R STT + M42349 BU

SPECIFICATIONS	M42346R	M42349	FEATURES
LEDs	6	6	4" STT + BU KIT
Voltage	12.8VDC	12.8VDC	Contains (1) M42346R and (1) M42349
Amp Draw	200mA	130mA	Red S/T/T Patented Lightning Optics
Dimensions	4.3" Diam. x 1.8" Depth	4.3" Diam. x 1.7" Depth	Retail Packaging
Mounting	Grommet	Grommet	5 Year Warranty
Connector	PL-3	PL-3	
Legal Heading	I6 S2 T2	R	
DOT/SAE	J2040, J2261	J593	



M42346R



and

M42349

KIT INCLUDES




Integrated PL-3 Connectors

NEW

LOW-PROFILE LED SURFACE MOUNT WARNING – TRI COLOR MODELS – 18 LEDs



Available in
5 Different Models /
Color Combinations



With Black
Bezel
(Included)

PART NUMBER	DESCRIPTION
M20494YGW-TC	Amber / Green / White Tri Color
M20494RGY-TC	Red / Green / Amber Tri Color
M20494RYW-TC	Red / Amber / White Tri Color
M20494RWB-TC	Red / White / Blue Tri Color
M20494BYW-TC	Blue / Amber / White Tri Color

SPECIFICATIONS	FEATURES
Voltage	12/24VDC
Amp Draw	0.8A 12VDC / 0.4A 24VDC
Dimensions	
- Light Only	5.6" W x 1.6" H x 0.5" D
- With Bezel	5.9" W x 1.6" H x 0.5" D
Mounting	2 Hole Surface, 4.7" C to C
Connector	5 Leads Blunt Cut, 7"
LEDs	18
Legal Heading	W-1
SAE	J595 Class 1 CA13
	• Available in 5 Models / Color Combinations • Each Model Includes 3 Colors in One Light • Each Color Fills The Whole Light • 28 Selectable Flash Patterns • 7 Selectable Flash Color Options • Up to 11 Programmable "Modes" • Programmable Dim Feature Available • Synchronized & Alternating Patterns • Class 1 & CA Title 13 • Polycarbonate Lens & Aluminum Housing • Low Profile Design • 5 Year Warranty

NEW

LOW-PROFILE LED SURFACE MOUNT WARNING – QUAD COLOR MODELS – 24 LEDs



Available in
2 Different Models /
Color Combinations



With Black
Bezel
(Included)

PART NUMBER	DESCRIPTION
M20494RBYW-QC	Red / Blue / Amber / White Quad Color
M20494RGYW-QC	Red / Green / Amber / White Quad Color

SPECIFICATIONS	FEATURES
Voltage	12/24VDC
Amp Draw	0.8A 12VDC / 0.4A 24VDC
Dimensions	
- Light Only	5.6" W x 1.6" H x 0.5" D
- With Bezel	5.9" W x 1.6" H x 0.5" D
Mounting	2 Hole Surface, 4.7" C to C
Connector	5 Leads Blunt Cut, 7"
LEDs	24
Legal Heading	W-1
SAE	J595 Class 1 CA13
	• Available in 2 Models / Color Combinations • Each Model Includes 4 Colors in One Light • Each Color Fills The Whole Light • 28 Selectable Flash Patterns • 15 Selectable Flash Color Options • Up to 11 Programmable "Modes" • Programmable Dim Feature Available • Synchronized & Alternating Patterns • Class 1 & CA Title 13 • Polycarbonate Lens & Aluminum Housing • Low Profile Design • 5 Year Warranty

NEW

180-DEGREE SURFACE MOUNT WARNING – AMBER CLEAR LENS



PART NUMBER	DESCRIPTION
M20495YCL	180-Degree Warning Light

SPECIFICATIONS	FEATURES
Voltage	12/24VDC
Amp Draw	1.0A 12VDC / 0.5A 24VDC
Dimensions	
- Light Only	3.5" W x 1.4" H x 1.4" D
- With Bracket	4.3" W x 2.4" H x 3.2" D
Mounting	2 Hole Surface, 3.1" C to C
Connector	4 Leads Blunt Cut, 15"
LEDs	12
Legal Heading	WS3-1 (180°)
SAE	J845 Class 1S
	• 21 Selectable Flash Patterns • SAE J845 Compliant 180-Degrees • Surface Mount or Bracket Mount • Optional Swivel Bracket Included • Polycarbonate Lens & Aluminum Housing • Sealed Electronics • 5 Year Warranty

NEW

4" ROUND GROMMET MOUNT BACK-UP ALARMS



Retail Packaging



Alarm Only



Shown in Grommet
(Grommet Included)



Rear Image

PART NUMBER	DESCRIPTION
M98097	97db Back-Up Alarm, 4" Grommet Mount 12/24VDC
M98102	102db Back-Up Alarm, 4" Grommet Mount 12/24VDC
SPECIFICATIONS	FEATURES
Voltage	12/24 VDC Dual-Voltage
Amp Draw	
- M98097	0.2A 12V / 0.1A 24V
- M98102	0.3A 12V / 0.2A 24V
Dimensions	4.3" Diam. x 1.6" D (without grommet)
Mounting	4" Grommet - Included
Connector	PL-3 with 5" Lead
Legal Heading	Type C (M98097), Type F (M98102)
SAE	J994
	• 4" Round Back-Up Alarm, Grommet Mount • M50400-B 4" Grommet INCLUDED • Available in 97dB or 102dB • Industry Standard PL-3 Connector • Reinforced Nylon Housing • 12/24 VDC Dual-Voltage • 2 Year Warranty



DISTRIBUTED BY:

PANOR CORP/MAXXIMA

125 CABOT COURT, HAUPPAUGE, NY 11788 USA

TEL: 631.434.1200 | 1.866.MAXXIMAFAX: 631.434.1457

INFO@MAXXIMA.COM | WWW.MAXXIMA.COM

T: 631.434.1200 F: 631.434.1457 WWW.MAXXIMA.COM

