



NEW PRODUCTS

SEPTEMBER 1ST, 2024



17 NEW PRODUCTS



SHARE YOUR PHOTOS
ON FACEBOOK OR INSTAGRAM USING



@MAXXIMA

PANOR CORP/MAXXIMA

125 Cabot Court, Hauppauge, NY 11788 USA

Tel: 631.434.1200 | 1.866.MAXXIMA

info@maxxima.com | www.maxxima.com



NEW

M42730Y-CA13 LED WARNING BEACON – CA TITLE 13



PART NUMBER DESCRIPTION

M42730Y-CA13 Warning Beacon Amber LED, Class 1, CA13

SPECIFICATIONS

Voltage	12/24VDC Dual-Voltage
Amp Draw	3.4A 12V / 1.7A 24V
Dimensions	6.5" Diam. x 5.4" H
Mounting	3 Hole Surface, 5.9" Bolt Circle
Connector	3 Wire Blunt Cut, 22"
LEDs	64
Legal Heading	W3-1
SAE	J845 Class 1A, CA 13

FEATURES

- SAE Class 1 LED Warning Beacon
- California CCR Title 13 Compliant (CA 13)
- 21 Programmable Flash Patterns
- 12-24VDC Dual-Voltage
- 2 Possible Bolt Circles:
 - Exterior: 3 Hole 5.9" Bolt Circle
 - Interior: 3 Hole 5.1" Bolt Circle
- Polycarbonate Dome & Base
- Retail Packaging
- 5 Year Warranty



Black-Out Dome Prevents Sun Wash-Out



Notched Base Allows Cable Exit



Under-Mount 5.1" Bolt Circle. Integrated M5 Nutserts

NEW

M42718Y LED WARNING BEACON – SAE CLASS 2



“Why settle for a Class 3 beacon when you can have a Maxxima Class 2 in the same size?”



**Notched Base Allows
Cable Exit**

PART NUMBER DESCRIPTION

M42718Y Warning Beacon Amber LED, Class 2"

SPECIFICATIONS

Voltage	12-80 VDC Multi-Voltage
Amp Draw	0.7A 12V / 0.4A 24V
Dimensions	5.1" Diam. x 3.6" H
Mounting	3 Hole Surface, 4.7" Bolt Circle
Connector	3 Wire Blunt Cut, 13"
LEDs	16
Legal Heading	W3-2
SAE	J845 Class 2A

FEATURES

- SAE Class 2 LED Warning Beacon
- 12 Programmable Flash Patterns
- 12-80 VDC Multi-Voltage
- Industry Standard Bolt Circle
- Polycarbonate Dome & ABS Base
- Retail Packaging
- 5 Year Warranty

Maxxima[®] OFFERS A WIDE RANGE OF LED BEACONS



M42705Y
Class 3

M42710Y
Class 1

M42720Y
Class 1

M42730Y
Class 1

M42740Y
Class 1

M42741Y
Class 1

NEW

4" ROUND GROMMET MOUNT BACK-UP ALARMS



PART NUMBER	DESCRIPTION
M98097	97dB Back-Up Alarm, 4" Grommet Mount 12/24VDC
M98102	102dB Back-Up Alarm, 4" Grommet Mount 12/24VDC

SPECIFICATIONS	
Voltage	12/24VDC Dual-Voltage
Amp Draw	
- M98097	0.2A 12V / 0.1A 24V
- M98102	0.3A 12V / 0.2A 24V
Dimensions	4.3" Diam. x 1.6" D (without grommet)
Mounting	4" Grommet - Included
Connector	PL-3 with 5" Lead
Legal Heading	Type C (M98097), Type F (M98102)
SAE	J994

FEATURES	
• 4" Round Back-Up Alarm, Grommet Mount • M50400-B 4" Grommet INCLUDED • Available in 97dB or 102dB • Industry Standard PL-3 Connector • Reinforced Nylon Housing • 12/24 VDC Dual-Voltage • 2 Year Warranty	

MAXXIMA FAMILY OF BACK-UP ALARMS



PART NUMBER	DESCRIPTION
M95097	97dB Back-Up Alarm 12-80 VDC
M95102	102dB Back-Up Alarm 12-80 VDC
M95107	107dB Back-Up Alarm 12-80 VDC
M95822	82-102dB Adjustable Back-up Alarm 12-80 VDC
M96097	97dB Back-up Poly-Phonic Ghost Alarm Hard-Wired 12-80 VDC
M97097	97dB Back-up Alarm Hard-Wired 12-80 VDC
M97102	102dB Back-up Alarm Hard-Wired 12-80 VDC
M97107	107dB Back-up Alarm Hard-Wired 12-80 VDC
M97822	82-102dB Back-up Alarm, Self-Adjusting Hard-Wired 12-80 VDC




Side View

DOME LIGHTS & AMBER TURN

NEW

M84427-SERIES 3" X 6" DOME LIGHTS

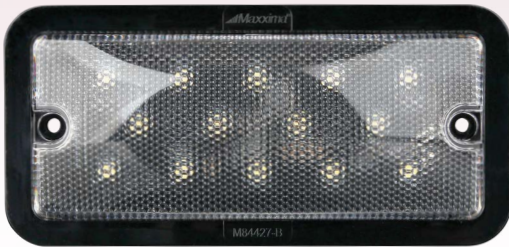

M84427-B / M84427-BX



M84427-SW



M84427-PIR

NEW

PART NUMBER DESCRIPTION

M84427-B	3" x 6" Dome Light 650 Lumens
M84427-BX	3" x 6" Dome Light 650 Lumens – Bulk Pack
M84427-SW	3" x 6" Dome Light 650 Lumens – On/Off Switch
M84427-PIR	3" x 6" Dome Light 650 Lumens – PIR Sensor

SPECIFICATIONS

Lumens	650
Voltage	12/24VDC
- M84427-BX	12V Only
Amp Draw	0.6A 12V / 0.3A 24V
Dimensions	5.8" W x 2.8" H x 0.9" D
Mounting	2 Hole Surface, 4.7" C to C
Connector	2 Leads Blunt Cut, 9"
LEDs	14 (M84427-BX 30 LEDs)

FEATURES


- Available in 3 configurations:
 - No Switch (-B and -BX Models)
 - Illuminated Touch Switch (-SW)
 - PIR Motion Sensor (-PIR)
- M84427-BX is 12-Volt Only, Other Models are 12/24VDC Dual-Voltage
- M84427-BX – No Screws, Other Models Include Mounting Screws
- Refrigeration Moisture Safe
- Polycarbonate Housing & Frosted Lens
- 5 Year Warranty

IMPROVED

M63350Y-X 6" OVAL AMBER PARK / TURN – BULK PACK



We made a change to extend the wire length of the M63350Y-X Bulk Pack model to accommodate certain mounting locations.

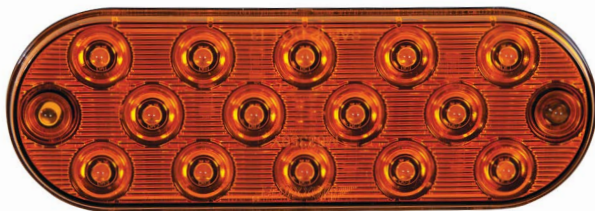

PART NUMBER DESCRIPTION

M63350Y	6" Oval Amber Park / Turn, Surface Mount
M63350Y-X	6" Oval Amber Park / Turn, Surface Mount – Bulk Pack

SPECIFICATIONS

LEDs	14
Voltage	12.8VDC
Amp Draw	290 mA / 30 mA
Dimensions	6.5" W x 2.3" H x 0.5" D
Mounting	2 Hole Surface, 5.5" C to C
Connector	
- M63350Y	3 Wires, Blunt Cut, 6"
- M63350Y-X	3 Wires, Blunt Cut, 18"
Legal Heading	I6 P
DOT/SAE	J222, J2261

FEATURES

- 6" Oval Amber Rear Park / Turn Lamp
- Horizontal or Vertical Mount
- Surface Mount, 2 Screws, Grommet, or Optional Tape Mount
- For Tape Mount, See M63350-TAPE Sold Separately
- For Grommet Mount, See M50607 Sold Separately
- For Retail Packaging, See M63350Y with 6" Wires
- M63350Y-X, with 18" Wires, Bulk Pack Only
- Includes Mounting Screws and Screw Caps
- 5 Year Warranty

HYBRID COMBINATION S/T/T & BACK-UP

NEW

4" ROUND GROMMET MOUNT STOP/TURN/TAILO & BACK-UP



PART NUMBER DESCRIPTION

M85401R 4" Round Combination STT + BU, Grommet Mount

SPECIFICATIONS

Voltage 12.8VDC
Amp Draw Stop 180mA, Tail 10mA, B/U 250mA
Dimensions 4.3" Diam. x 1.4"D
Mounting 4" Grommet
Connector Integrated 4-Pin DryFit + Includes Pigtail
LEDs 13 (9 Red, 4 White)
Legal Heading I6 S2 T2 R
SAE J593, J2040, J2261

FEATURES

- Hybrid Combination Stop/Turn/Tail & Back-Up Lamp
- 4" Grommet Mount (M50400-B Sold Separately)
- 4-Pin DryFit Connector (Pigtail Included)
- Acrylic Lens / ABS Housing
- 5 Year Warranty

NEW

6" OVAL GROMMET MOUNT STOP/TURN/TAILO & BACK-UP



PART NUMBER DESCRIPTION

M85601R 6" Oval Combination STT + BU, Grommet Mount

SPECIFICATIONS

Voltage 12.8VDC
Amp Draw Stop 180mA, Tail 10mA, B/U 250mA
Dimensions 6.5" W x 2.3" H x 1.4" D
Mounting 6" Grommet
Connector Integrated 4-Pin DryFit + Includes Pigtail
LEDs 14 (10 Red, 4 White)
Legal Heading I6 S2 T2 R
SAE J593, J2040, J2261

FEATURES

- Hybrid Combination Stop/Turn/Tail & Back-Up Lamp
- 6" Grommet Mount (M50600-B Sold Separately)
- 4-Pin DryFit Connector (Pigtail Included)
- DOT Compliant in Both Horizontal or Vertical Mount
- Acrylic Lens / ABS Housing
- 5 Year Warranty

6" OVAL SURFACE MOUNT SERIES

NEW

M85620R 6" OVAL HYBRID COMBO STT + BU – SURFACE MOUNT



Side View

PART NUMBER DESCRIPTION

M85620R 6" Oval Hybrid Combination S/T/T & BU

SPECIFICATIONS

LEDs 13
Voltage 12.8VDC
Amp Draw Stop 150mA, Tail 10mA, B/U 150mA
Dimensions 7.8" W x 3.5" H x 0.6" D
Mounting 2 Hole Surface, 7.25" C to C Qty. (2)
Connector Qty. (2) PL-3, 7" Leads
Legal Heading I6 S2 T2 R
DOT/SAE J593, J2040, J2261

FEATURES

- 6" Oval Hybrid Combo Stop/Turn/Tail & Back-Up
- Replaces **M85615R & M85616R**
- Industry Standard 7.25" Bolt Spacing
- Qty. (2) Industry Standard PL-3 Three-Pin Connectors
- Polycarbonate Lens & Housing
- DOT Compliant in Both Horizontal or Vertical Mount
- 5 Year Warranty

NEW

M63320-SERIES 6" OVAL SURFACE MOUNT



M63320R-A



M63320R-ACH



M63320-A



M63320-ACH



M63320CL-A Clear Lens – Lights Up Red



M63320Y-A

PART NUMBER DESCRIPTION

M63320-A 6" Oval White Back-Up, Surface Mount Black
M63320-ACH 6" Oval White Back-Up, Surface Mount Chrome
M63320R-A 6" Oval Red Stop/Turn/Tail, Surface Mount Black
M63320R-ACH 6" Oval Red Stop/Turn/Tail, Surface Mount Chrome
M63320RCL-A 6" Oval Red Clear Lens Stop/Turn/Tail, Surface Mount Black
M63320Y-A 6" Oval Amber Park/Front/Rear Turn, Surface Mount Black

SPECIFICATIONS RED R-A / RCL-A / R-ACH WHITE -A / -ACH AMBER Y-A FEATURES

	RED R-A / RCL-A / R-ACH	WHITE -A / -ACH	AMBER Y-A	FEATURES
LEDs	10	10	10	• 6 Oval Surface Mount
Voltage	12.8VDC	12.8VDC	12.8VDC	• Industry Standard 7.25" Bolt Spacing
Amp Draw	100mA / 10mA	270mA	250mA	• Red STT and White B/U Also Avail. in Chrome
Dimensions	7.8" W x 3.5" H x 0.7" D	7.8" W x 3.5" H x 0.7" D	7.8" W x 3.5" H x 0.7" D	• Red STT Available in Red or Clear Lens
Mounting	2 Hole Surface, 7.25" C to C	2 Hole Surface, 7.25" C to C	2 Hole Surface, 7.25" C to C	• Back-Up DOT Compliant for 1-Lamp or 2-Lamp
Connector	3 Leads Blunt Cut, 13"*** *R-ACH 7" Leads	2 Leads Blunt Cut, 13"*** *ACH 7" Leads	3 Leads Blunt Cut, 13"	• Amber Available in Amber Lens Only
Legal Heading	I6 S2 T2	R	I6 P	• Horizontal or Vertical Mount
DOT/SAE	J2040, J2261	J593	J222, J2261	• 5 Year Warranty

LED WORK LIGHTS

NEW

MWL-45-A COMPACT 3" SQUARE LED WORK LIGHT – 1,800 LUMENS



PART NUMBER DESCRIPTION

MWL-45-A Mini Square 24 LED Work Light 1,800 Lumens

SPECIFICATIONS

Lumens 1,800
Voltage 12/24VDC
Amp Draw 1.5A 12V / 0.7A 24V
Dimensions 3.0" W x 3.0" H x 1.5" D
Mounting 5/16" Stainless Steel Bolt
Connector 2 Jacketed Leads Blunt Cut, 8"
LEDs 24

FEATURES

- Compact 3" x 3" Work Light
- 1,800 Lumens
- **Extra Wide Flood Beam Pattern**
- Replaces **MWL-45**
- 12/24VDC Dual Voltage
- Polycarbonate Lens
- Cast Aluminum Housing
- Stainless Steel Mounting Hardware
- 5 Year Warranty

NEW

MWL-61-A ULTRA BRIGHT LED WORK LIGHT BAR – 5,500 LUMENS



Includes Mating DT-Style Pigtail



Swivel Bracket



Stainless Mounting Hardware

PART NUMBER DESCRIPTION

MWL-61-A Rectangular Light Bar Scene Light 5,500 Lumens

SPECIFICATIONS

Lumens 5,500
Voltage 12-36 VDC Multi-Voltage
Amp Draw 4.5A 12V / 2.3A 24V
Dimensions 10.6" W x 3.7" H x 2.4" D
Mounting U-Bracket with (2) M8 Stainless Bolts
Connector DT-04-2P Pigtail, 17" with Mating Connector, 5"
LEDs 56

FEATURES

- Work Light Bar on Swivel Bracket
- 5,500 Lumens
- **60° Flood Beam – Scene Light**
- Replaces **MWL-61**
- 12-36 VDC Multi-Voltage
- Polycarbonate Lens
- Cast Aluminum Housing
- Adjustable Swivel Mount
- Stainless Steel Mounting Hardware
- 5 Year Warranty

LED WORK LIGHTS

NEW

MWL-70 COMPACT 3" ROUND LED WORK LIGHT – 2,000 LUMENS



PART NUMBER DESCRIPTION

MWL-70 Compact Round 6 LED Work Light 2,000 Lumens

SPECIFICATIONS

Lumens 2,000
Voltage 12/24VDC
Amp Draw 1.9A 12V / 1.0A 24V
Dimensions 3.2" Diameter x 1.9" D
Mounting 5/16" Stainless Steel Bolt
Connector 2 Jacketed Leads Blunt Cut, 8"
LEDs 6

FEATURES

- Compact 3.2" Round Work Light
- 2,000 Lumens
- **Spot Beam Pattern**
- 12/24VDC Dual Voltage
- Polycarbonate Lens
- Cast Aluminum Housing
- Stainless Steel Mounting Hardware
- 5 Year Warranty

NEW

MWL-32-SERIES WORK LIGHT / LOAD LIGHT – 1,800 LUMENS



45° Downward Angle

PART NUMBER DESCRIPTION

MWL-32-A 1.8" x 6" Exterior Scene / Load Light 1800 Lumens

MWL-32-ACH 1.8" x 6" Exterior Scene / Load Light 1800 Lumens

SPECIFICATIONS

Lumens 1,800
Voltage 12/24VDC
Amp Draw 1.6A 12V / 0.8A 24V
Dimensions 5.9" W x 1.8" H x 1.4" D
Mounting 2 Hole Surface, 5-9/32" Center to Center
Connector 2 Jacketed Leads Blunt Cut, 16"
LEDs 58

FEATURES

- Black Housing MWL-32-A
- Chrome Housing MWL-32-ACH
- Exterior Scene Light / Work Light / Load Light
- **MWL-32-A** Replaces **MWL-32**
- 1,800 Lumens
- **Flood Beam Pattern**
- 12/24VDC Dual Voltage
- Polycarbonate Lens, Cast Aluminum Housing
- Stainless Steel Mounting Hardware & Gasket
- 5 Year Warranty

LED INTERIOR LIGHTS / DOME LIGHTS

NEW

M84435-AX 6" DOME LIGHT – BULK PACK



PART NUMBER	DESCRIPTION
-------------	-------------

M84435-A	6.0" LED Dome Light, 1,400 Lumens
----------	-----------------------------------

NEW M84435-AX	6" LED Dome Light, 1,400 Lumens – Bulk Pack
---------------	---

SPECIFICATIONS

Lumens	1,400
Voltage	12/24VDC
Amp Draw	1.5A 12V / 0.8A 24V
Dimensions	5.9" Diameter x 1.2"D
Mounting	3 Hole Surface, 5" Bolt Circle
Connector	2 Leads Blunt Cut, 12"
LEDs	42

FEATURES

- 6" Round, Surface Mount, Dome Light
- High Output – 1,400 Lumens
- 12/24VDC Dual Voltage
- Polycarbonate Lens
- White ED Coated Aluminum Housing
- Mounting Screws Included
- 5 Year Warranty

NEW

M84406PIR-AX 5.5" DOME LIGHT with PIR – BULK PACK



PART NUMBER	DESCRIPTION
-------------	-------------


M84406PIR-AX	5.50" LED Dome Light, PIR Sensor – Bulk Pack
--------------	--

SPECIFICATIONS

Lumens	450
Voltage	12.8VDC
Amp Draw	0.6A
Dimensions	5.5" Diameter x 1"D
Mounting	3 Hole Surface, 5" Bolt Circle
Connector	2 Leads Blunt Cut, 13"
LEDs	27

FEATURES

- 5.5" Round, Surface Mount, Dome Light
- 450 Lumens
- PIR Motion Sensor – 3 Minute Timer
- Polycarbonate Lens
- ABS & Polycarbonate Housing
- Mounting Screws Included
- 5 Year Warranty

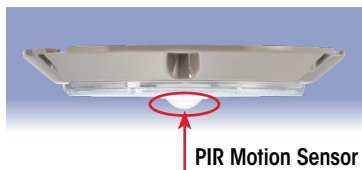

PIR Motion Sensor

MaxximaStyle



MTK-100
13-In-1 Multi-Tool
Starting at \$23.95



MTAPE25
Pro Grade 25'
Tape Measure
\$12.99



MSL-205000F
2-Foot Shop Light, Adjustable
5,000 Lumens, Frosted Lens
\$29.99




MF-48
Headband LED
Flashlight
\$59.95



MF-46
600 Lumen
LED Flashlight
\$15.95



MF-47
1,350 Lumen
LED Flashlight
\$34.95

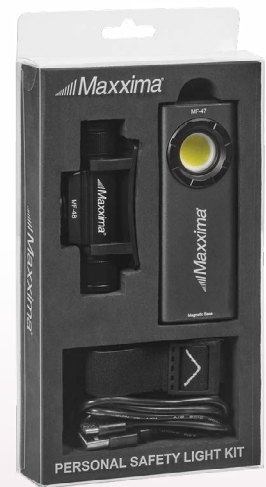

MF-49-KIT
Personal Safety
Light Kit
\$65.95



PANOR CORP / MAXXIMA

125 CABOT COURT, HAUPPAUGE, NY 11788 USA
TEL: 631.434.1200 | 1.866.MAXXIMAFAX: 631.434.1457
INFO@MAXXIMA.COM | WWW.MAXXIMA.COM

DISTRIBUTED BY: