

 **Maxxima®**

MEMBER OF **NTEA**
THE ASSOCIATION FOR THE WORK TRUCK INDUSTRY

NEW PRODUCTS

OCTOBER 1ST, 2025

26 NEW PRODUCTS



**SHARE YOUR PHOTOS ON
FACEBOOK OR INSTAGRAM USING @MAXXIMA**

PANOR CORP/MAXXIMA

125 Cabot Court, Hauppauge, NY 11788 USA

Tel: 631.434.1200 | 1.866.MAXXIMA

info@maxxima.com | www.maxxima.com

    / maxxima


WATERMELON CLEARANCE MARKERS

NEW

M17400-SERIES CLEAR LENS



M17400RCL



M17400RCL Illuminated



M17400YCL

M17400RCL

Watermelon Clearance Marker Red Clear Lens

M17400YCL

Watermelon Clearance Marker Amber Clear Lens

SPECIFICATIONS

Voltage	12.8VDC
Amp Draw	160mA / 20mA
Dimensions	3.9" Diam. x 2.4"D (with Bezel)
Mounting	2 Hole Surface, 3.2" C to C
Connector	3 Wire, 7 inch, .180 Bullets
LEDs	9
Legal Heading	P2, P3
DOT/SAE	J592, J2042

FEATURES

- Diamond Optics – Superior Beam Pattern
- Acrylic Lens & Stainless Steel Bezel
- DOT Compliant P2/P3 Clearance Marker
- 3-Wire High / Low Intensity
- .180 Male Bullet Terminals
- 5 Year Warranty



Side Profile

NEW

M17400-SERIES COLORED LENS



M17400R



M17400R Illuminated



M17400Y

M17400R

Watermelon Clearance Marker Red Lens

M17400Y

Watermelon Clearance Marker Amber Lens

SPECIFICATIONS

Voltage	12.8VDC
Amp Draw	160mA / 20mA
Dimensions	3.9" Diam. x 2.4"D (with Bezel)
Mounting	2 Hole Surface, 3.2" C to C
Connector	3 Wire, 7 inch, .180 Bullets
LEDs	9
Legal Heading	P2, P3
DOT/SAE	J592, J2042

FEATURES

- Diamond Optics – Superior Beam Pattern
- Acrylic Lens & Stainless Steel Bezel
- DOT Compliant P2/P3 Clearance Marker
- 3-Wire High / Low Intensity
- .180 Male Bullet Terminals
- 5 Year Warranty

LED WORK LIGHTS

NEW

MWL-32-YWCL AMBER OR WHITE LED WORK LIGHT / SCENE LIGHT



Illuminated White



Illuminated Amber

SPECIFICATIONS

Lumens	1,100
Voltage	12/24VDC Dual Voltage
Amp Draw	White 1.2A 12V / Amber 0.8A 12V
Dimensions	5.9" W x 1.8" H x 1.4" D
Mounting	2 Hole Surface, 5.3" C to C
Connector	3 Leads Blunt Cut, 16"
LEDs	52 (29 White, 23 Amber)

FEATURES

- Dual Color, Amber & White, Scene Light
- Amber Light is DOT Compliant P2 P3 Clearance Marker
- White Light is 1,100 Lumens
- Light is Directed Downward at Approx. 45° Angle
- Dedicated Wires for Each Color, Amber & White
- Polycarbonate Lens
- Chrome Plated Cast Aluminum Housing
- Mounting Gasket & Stainless Screws Included
- 5 Year Warranty



Side View

MWL-32-YWCL

1.8" x 6" Exterior Scene / Load Light Amber White Clear Lens

NEW

MWL-42Y-MH HIGH POWER AMBER LED WORK LIGHT - HEATED LENS



MaxxHeat



SPECIFICATIONS

Voltage	12/24VDC Dual Voltage
Amp Draw	2.25A 12V / 4.2A 12V with Heater On
Dimensions	5.9" W x 3.6" H x 1.5" D
Mounting	5/16" Stainless Steel Bolt
Connector	2 Wires, Jacketed, 11" – Blunt Cut
LEDs	16

FEATURES

- Cold Weather, Heated Lens, Amber LED Work Light
- Heater Automatically Turns On or Off with Built-In Thermostat
- No Additional Wires for Heater
- Specific Shade of Amber – for Long Range Visibility
- **Patented MaxxHeat® Technology**
- **US Patent No 11,339,947**
- Wide Flood Beam Angle
- 12/24VDC Dual Voltage
- Cast Aluminum Housing, Polycarbonate Lens
- 5 Year Warranty

MWL-42Y-MH


Rectangular Amber Work Light 12/24VDC, MaxxHeat

NEW

M20561 ELITE 60" LED TOW & RECOVERY LIGHTBAR



Front



Rear

SPECIFICATIONS

Voltage	12/24VDC Dual Voltage
Max Amp Draw	18A Max 12V / 9A Max 24V
Dimensions	59.4" W x 1.7" H x 11.8" D
Mounting	Flat Mount, U-Bracket Included
Connector	5 Jacketed Wires, 25' Length
LEDs	22 LED heads, 252 Total LEDs
Legal Heading	J595 Class 1, J845 Class 1A, CA13
SAE	W3-1M, W-1M, CA113



FEATURES

- 60" Amber Tow Bar – Low Profile Linear LED Lightbar
- 22-Heads with Work Lights, Stop/Turn/Tail, Traffic Director
- Amber Flashing Warning Front, Sides, and Rear
- Red Stop/Turn & Tail Lights and Rear Facing White Work Lights
- 30 Programmable Flashing Warning Patterns
- Low Power (Dim) Mode and Front Cut Off
- Discrete Wiring – No Laptop Needed to Program
- 25-Foot Cable, 15-Conductor Jacketed Cable
- Heavy Duty U-Shape Tow Bracket and Mounting Hardware Included
- Approvals: J595 Class 1, J845 Class 1A, CA Title 13
- Easy Serviceability while Mounted on Vehicle – Service Parts Available
- 5 Year Warranty

M20561


60" LED Lightbar "Select", Amber, 22 Heads, Work Lights, STT, Traffic Director

NEW

M20562BY ELITE 60" LED TOW & RECOVERY LIGHTBAR



Front



Rear

SPECIFICATIONS

Voltage	12/24VDC Dual Voltage
Max Amp Draw	18A Max 12V / 9A Max 24V
Dimensions	59.4" W x 1.7" H x 11.8" D
Mounting	Flat Mount, U-Bracket Included
Connector	5 Jacketed Wires, 25' Length
LEDs	22 LED heads, 252 Total LEDs
Legal Heading	J595 Class 1, J845 Class 1A, CA13
SAE	W3-1M, W-1M, CA113



FEATURES

- 60" Amber Tow Bar – Low Profile Linear LED Lightbar
- 22-Heads with Work Lights, S/T/T, Traffic Director, Rear Blue
- Amber Flashing Warning Front, Sides, and Rear + Blue Rear Flashing
- Red Stop/Turn & Tail Lights and Rear Facing White Work Lights
- 30 Programmable Flashing Warning Patterns
- Low Power (Dim) Mode and Front Cut Off
- Discrete Wiring – No Laptop Needed to Program
- 25-Foot Cable, 15-Conductor Jacketed Cable
- Heavy Duty U-Shape Tow Bracket and Mounting Hardware Included
- Approvals: J595 Class 1, J845 Class 1A, CA Title 13
- Easy Serviceability while on Vehicle – Service Parts Available
- 5 Year Warranty

M20562BY


60" LED Lightbar "Select", Amber/Blue, 22 Heads, Work Lights, STT, Traffic Director

NEW

M20560 SELECT 60" LED TOW & RECOVERY LIGHTBAR



Front



Rear

SPECIFICATIONS

Voltage	12/24VDC Dual Voltage
Max Amp Draw	14A Max 12V / 7A Max 24V
Dimensions	59.4" W x 1.7" H x 11.8" D
Mounting	Flat Mount, U-Bracket Included
Connector	5 Jacketed Wires, 25' Length
LEDs	16 LED heads, 180 Total LEDs
Legal Heading	J595 Class 1, J845 Class 1A, CA13
SAE	W3-1M, W-1M, CA113



FEATURES

- 60" Amber Tow Bar – Low Profile Linear LED Lightbar
- 16-Heads with Work Lights and Stop/Turn/Tails
- Amber Flashing Warning Front, Sides, and Rear
- Red Stop/Turn & Tail Lights and Rear Facing White Work Lights
- 30 Programmable Flashing Warning Patterns
- Low Power (Dim) Mode and Front Cut Off
- Discrete Wiring – No Laptop Needed to Program
- 25-Foot Cable, 15-Conductor Jacketed Cable
- Heavy Duty U-Shape Tow Bracket and Mounting Hardware Included
- Approvals: J595 Class 1, J845 Class 1A, CA Title 13
- Easy Serviceability while Mounted on Vehicle – Service Parts Available
- 5 Year Warranty

M20560

60" LED Tow Bar "Select", 16 Amber Heads with Work Lights, Stop/Tail/Turn

NEW

MRP-20500-SERIES SERVICE PARTS



MRP-20501



MRP-20502



MRP-20503



MRP-20504



MRP-20508



MRP-20505



MRP-20506



MRP-20507



MRP-20509



MRP-20510

MRP-20501

MRP-20502

MRP-20503

MRP-20504

MRP-20505

MRP-20506

MRP-20507

MRP-20508

MRP-20509

MRP-20510

Replacement Mounting Kit – M20560_61 60" Tow Bar: 2 Pcs. U-Bracket & Hardware

Replacement Top Dome, End Section – M20560_61 60" Tow Bar

Replacement Top Dome, Center Section – M20560_61 60" Tow Bar

Replacement CPU Motherboard – M20560_61 60" Tow Bar

Replacement Light Head, Front, Rear, or Corner **All Amber** – M20560_61 60" Tow Bar

Replacement Light Head, Rear **Amber/White** Work Light – M20560_61 60" Tow Bar

Replacement Light Head, Rear **Amber/Red** S/T/T – M20560_61 60" Tow Bar

Replacement Cable Assembly, 25 foot – M20560_61 60" Tow Bar

Replacement Light Head, Front, Rear, or Corner **All Blue** – M20560_61 60" Tow Bar

Replacement Light Head, Front, Rear, or Corner **All White** – M20560_61 60" Tow Bar

NEW

NEW

LED DOME LIGHTS *or* EXTERIOR SCENE LIGHTS

NEW

6" MODELS – M84461-SERIES DOME LIGHTS



M84461



M84461-PIR

M84461

2.5" x 6" Rectangular Dome / Scene Light 550 Lumens 12/24VDC

M84461-PIR

2.5" x 6" Rectangular Dome / Scene Light 550 Lumens 12/24VDC – PIR Sensor

SPECIFICATIONS

Lumens	550
Voltage	12/24VDC Dual Voltage
Amp Draw	0.5A 12V / 0.3A 24V
Dimensions	6.0" W x 2.4" H x 0.5" D (0.7" -PIR)
Mounting	2 Hole Surface, 5.6" C to C
Connector	2 Leads, Sleeved, Blunt Cut, 12"
LEDs	14

FEATURES

- Interior *or* Exterior Use – IP67 Rated
- 550 Lumen Flood Beam
- Available with or w/o PIR Sensor
- M84461-PIR Motion Activated, 3-Min. Timer
- Sleek Black Cast Aluminum Housing
- Polycarbonate Lens
- Mounting Screws Included
- 5 Year Warranty



Side View

NEW

6" MODEL – M84462 SCENE LIGHT / PORCH LIGHT



M84462
45 Degree Down Angle



Side View

SPECIFICATIONS

Lumens	400
Voltage	12/24VDC Dual Voltage
Amp Draw	0.5A 12V / 0.3A 24V
Dimensions	6.0" W x 2.1" H x 0.6" D
Mounting	2 Hole Surface, 5.6" C to C
Connector	2 Leads, Sleeved, Blunt Cut, 12"
LEDs	14

FEATURES

- Interior *or* Exterior Use - IP67 Rated
- 400 Lumen Flood Beam
- 45° Down Angle Lighting - Perfect for Scene Light, Porch Light, or for Interior Illumination
- Sleek Black Cast Aluminum Housing
- Polycarbonate Lens
- Mounting Screws Included
- 5 Year Warranty

M84462

2" x 6" Rectangular Dome / Scene Light 400 Lumens 12/24VDC – 45 Degree Down Angle

LED DOME LIGHTS *or* EXTERIOR SCENE LIGHTS

NEW

8" MODELS – M84463-SERIES DOME LIGHTS



M84463



M84463-PIR

SPECIFICATIONS

Lumens	1,050
Voltage	12/24VDC Dual Voltage
Amp Draw	1.0A 12V / 0.5A 24V
Dimensions	8.0" W x 2.4" H x 0.5" D (0.7" -PIR)
Mounting	2 Hole Surface, 7.6" C to C
Connector	2 Leads, Sleeved, Blunt Cut, 12"
LEDs	26

FEATURES

- Interior *or* Exterior Use – IP67 Rated
- 1,050 Lumen Flood Beam
- Available with or w/o PIR Sensor
- M84463-PIR Motion Activated, 3-Min. Timer
- Sleek Black Cast Aluminum Housing
- Polycarbonate Lens
- Mounting Screws Included
- 5 Year Warranty



Side View

M84463

2.5" x 8" Rectangular Dome / Scene Light 1,050 Lumens 12/24VDC

M84463-PIR

2.5" x 8" Rectangular Dome / Scene Light 1,050 Lumens 12/24VDC – PIR Sensor

NEW

8" MODEL – M84464 SCENE LIGHT / PORCH LIGHT



M84464
45 Degree Down Angle



Side View

SPECIFICATIONS

Lumens	850
Voltage	12/24VDC Dual Voltage
Amp Draw	1.0A 12V / 0.5A 24V
Dimensions	8.0" W x 2.1" H x 0.6" D
Mounting	2 Hole Surface, 7.6" C to C
Connector	2 Leads, Sleeved, Blunt Cut, 12"
LEDs	26

FEATURES

- Interior or Exterior Use - IP67 Rated
- 850 Lumen Flood Beam
- 45° Down Angle Lighting - Perfect for Scene Light, Porch Light, or for Interior Illumination
- Sleek Black Cast Aluminum Housing
- Polycarbonate Lens
- Mounting Screws Included
- 5 Year Warranty

M84464

2" x 8" Rectangular Dome / Scene Light 850 Lumens 12/24VDC – 45 Degree Down Angle

LED WORK LIGHTS

NEW

MWL-62-A 7,000 LUMENS LED WORK LIGHT



SPECIFICATIONS

Lumens	7,000
Voltage	12/24VDC Dual Voltage
Amp Draw	7.0A 12V / 3.5A 24V
Dimensions	4.9" W x 4.3" H x 3.3" D
Mounting	M10 Stainless Steel Bolt
Connector	Integrated Deutsch DT04-Style Includes DT06 Pigtail, 5" Long Blunt Cut
LEDs	144

FEATURES

- Ultra High Output – 7,000 Lumens
- 110° Wide Flood Beam Angle
- 12/24VDC Dual Voltage
- Integrated Deutsch-Style Connector
- Pigtail Connector Included
- Cast Aluminum Housing, Polycarbonate Lens
- Replaces MWL-62
- 5 Year Warranty



MWL-62-A

Square 144 LED Work Light 7,000 Lumens 12-24VDC, A-Series

NEW

MWBL-1-B 3,500 LUMENS 1.4" x 24" LED WORK LIGHT BAR



SPECIFICATIONS

Lumens	3,500
Voltage	12/24VDC Dual Voltage
Amp Draw	3.8A 12V / 1.9A 24V
Dimensions	
- Light Only	24.25" W x 1.4" H x 1.3" D
- w/ Brackets	26.0" W x 1.8" H x 1.6" D
Mounting	2 Hole Surface, 21.2" C to C
Connector	2 Jacketed Leads Blunt Cut, 18"
LEDs	80

FEATURES

- Low Profile, 2-Foot Work Light bar
- 3,500 Lumens Flood Beam
- 12/24 VDC Dual Voltage
- Universal L-Brackets Allow Swivel Adjust to Optimal Angle
- Aluminum Housing & Steel Brackets
- Polycarbonate Lens
- Replaces MWBL-1-A
- 5 Year Warranty



MWBL-1-B

Work Bar Light 3,500 Lumens 12/24VDC

OVAL TURN SIGNAL *and* RECTANGULAR GROMMET

NEW

M63350Y-A 6" AMBER FRONT / REAR PARK TURN

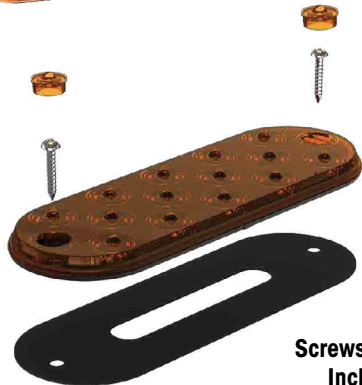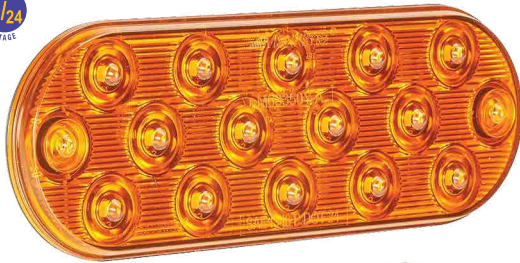

**Screws & Caps
Included**

SPECIFICATIONS

Voltage	12.8VDC
Amp Draw	0.6A Turn / 30mA Park
Dimensions	6.5" W x 2.3" H x 0.5" D
Mounting	2 Hole Surface, 5.5" C to C
Connector	3 Wires, Blunt Cut, 6 inch (Y-A), 18" (Y-AX)
LEDs	14
Legal Heading	I3, I6, P
DOT/SAE	J222, J2261

FEATURES

- 6" Oval Amber Park / Front Turn / Rear Turn
- DOT Compliant I6 and I3 Front Turn
- Available in Retail Pack or Bulk Pack (-X)
- Surface Mount – Mounting Screws & Caps Included, or Optional M50608 Grommet Mount
- Vertical or Horizontal Mount
- Polycarbonate Lens & Housing
- Replaces M63350Y / M63350Y-X
- 5 Year Warranty



Side Profile

M63350Y-A

6" Oval Amber Park/Front/Rear Turn Thin Profile

M63350Y-AX

6" Oval Amber Park/Front/Rear Turn Thin Profile – Bulk Pack

NEW

3" x 5" LOW PROFILE VINYL GROMMET – BULK PACK



SPECIFICATIONS

Dimensions	6.3" W x 4.4" H x 1.0" D
Hole Cutout	5.45" x 3.57" with 1" corner radius
Panel Thickness	0.08" to 0.20"

FEATURES

- 3" x 5" Low Profile Mounting Grommet
- Premium Vinyl PVC Material
- Compatible with M42213-Series, M42214, and M42215-Series
- Bulk Packaged



**Shown with M42213R-A
Light not included**


M49701-X

3" x 5" Rectangular Low Profile Grommet – Bulk Pack

ELECTRICAL CONNECTORS

NEW

M50965-100 3-PIN CONTINUOUS WIRE HARNESS

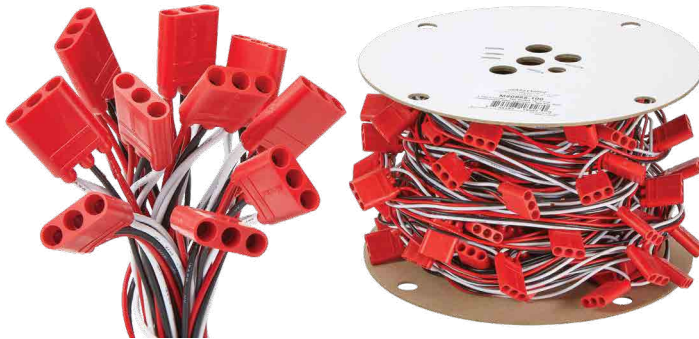

The **M50965-100** is a continuous wire harness, which contains 3-Pin Female .180 Bullet connectors, spaced 12" apart. The roll contains a total of 100 Female plugs on 18 AWG wire, with grease inside each connector for easy connectivity and corrosion resistance.

SPECIFICATIONS

Dimensions	100 foot roll, 12" Spacing Between Connectors
Connector	3-Pin Female .180 Bullet

FEATURES


- Premium Maxxima Red 3-Pin Female .180 Bullet Connectors
- Continuous Roll – 12" Spacing
- 18AWG Wire

M50965-100

3-Pin Female .180 Bullet 12" Lead Continuous Wire Harness – 100 Per Roll

NEW

M50922 2 PIN PL-2 BACK-UP LAMP PIGTAIL

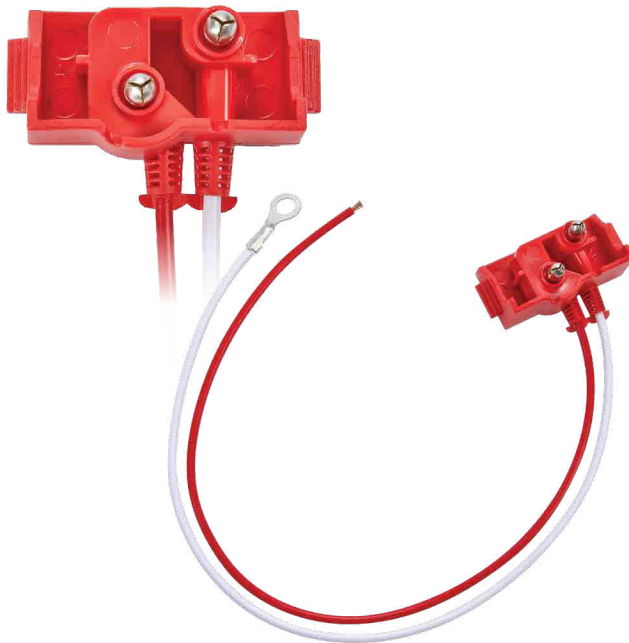

SPECIFICATIONS

Connector	PL-2 to (1) Blunt Cut & (1) Ring Terminal
Dimensions	10" Wire Leads

FEATURES

- Premium Maxxima Red Connector
- 2 Pin PL-2, 90-Degree
- Wire Strain Relief
- 18AWG Wire
- Plated Brass Pins
- Designed for Back-Up Lamps or Other 2-Wire Connections

M50922

2-Pin PL-2 Connector 90-Degree

MAXXIMA FAMILY OF BACK-UP ALARMS



Trust Maxxima for all your back-up alarm needs. We are an industry leader and offer a wide selection of static and auto-adjusting as well as our signature *Ghost Alarm*.



M95-Series
2 Stud Terminals



M96-Series Ghost Alarm
Referred to as radio static "white noise"



M97-Series
Hard-Wired



Side View



M98-Series
Shown in Grommet
(Grommet Included)



M98-Series
Alarm Only



M99-Series
Heavy Duty 112dB

- M95097** 97dB Back-Up Alarm 12-80 VDC
- M95102** 102dB Back-Up Alarm 12-80 VDC
- M95107** 107dB Back-Up Alarm 12-80 VDC
- M95822** 82-102dB Adjustable Back-up Alarm 12-80 VDC

- NEW** **M99112** 112db Back-Up Alarm Hard-Wired 12-80 VDC
- NEW** **M99872** 87-112db Back-Up Alarm, Self-Adjusting Hard-Wired 12-80 VDC

- M96097** 97dB Back-up Poly-Phonic Ghost Alarm Hard-Wired 12-80 VDC
- M97097** 97dB Back-up Alarm Hard-Wired 12-80 VDC
- M97107** 107dB Back-up Alarm Hard-Wired 12-80 VDC
- M97822** 82-102dB Back-up Alarm, Self-Adjusting Hard-Wired 12-80 VDC
- M98097** 97dB Back-Up Alarm, 4" Grommet Mount 12/24VDC
- M98102** 102dB Back-Up Alarm, 4" Grommet Mount 12/24VDC



PANOR CORP / MAXXIMA

125 Cabot Court, Hauppauge, NY 11788 USA

Tel: 631.434.1200 | 1.866.MAXXIMA Fax: 631.434.1457

info@maxxima.com | www.maxxima.com

DISTRIBUTED BY: